

HyperSQL User Guide

HyperSQL Database Engine 2.3.4

Edited by , Blaine Simpson, and Fred Toussi

HyperSQL User Guide: HyperSQL Database Engine 2.3.4

by , Blaine Simpson, and Fred Toussi

\$Revision: 5631 \$

Publication date 2016-05-15 15:57:21-0400

Copyright 2002-2016 Blaine Simpson, Fred Toussi and The HSQL Development Group. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. You are not allowed to distribute or display this document on the web in an altered form.

Table of Contents

Preface	xiii
Available formats for this document	xiii
1. Running and Using HyperSQL	1
Introduction	1
The HSQLDB Jar	1
Running Database Access Tools	2
A HyperSQL Database	2
In-Process Access to Database Catalogs	3
Server Modes	4
HyperSQL HSQL Server	4
HyperSQL HTTP Server	5
HyperSQL HTTP Servlet	5
Connecting to a Database Server	5
Security Considerations	6
Using Multiple Databases	6
Accessing the Data	6
Closing the Database	7
Creating a New Database	7
2. SQL Language	9
Standards Support	9
SQL Data and Tables	9
Temporary Tables	10
Persistent Tables	10
Short Guide to Data Types	11
Data Types and Operations	12
Numeric Types	12
Boolean Type	14
Character String Types	14
Binary String Types	15
Bit String Types	16
Lob Data	17
Storage and Handling of Java Objects	17
Type Length, Precision and Scale	18
Datetime types	19
Interval Types	22
Arrays	25
Array Definition	25
Array Reference	27
Array Operations	27
Indexes and Query Speed	29
Query Processing and Optimisation	30
Indexes and Conditions	30
Indexes and Operations	31
Indexes and ORDER BY, OFFSET and LIMIT	31
3. Sessions and Transactions	33
Overview	33
Session Attributes and Variables	33
Session Attributes	34
Session Variables	34
Session Tables	34
Transactions and Concurrency Control	35

Two Phase Locking	35
Two Phase Locking with Snapshot Isolation	36
Lock Contention in 2PL	36
Locks in SQL Routines and Triggers	36
MVCC	36
Choosing the Transaction Model	37
Schema and Database Change	38
Simultaneous Access to Tables	38
Viewing Sessions	38
Session and Transaction Control Statements	39
4. Schemas and Database Objects	46
Overview	46
Schemas and Schema Objects	46
Names and References	47
Character Sets	47
Collations	48
Distinct Types	49
Domains	49
Number Sequences	49
Tables	51
Views	52
Constraints	52
Assertions	53
Triggers	53
Routines	54
Indexes	54
Synonyms	54
Statements for Schema Definition and Manipulation	54
Common Elements and Statements	54
Renaming Objects	56
Commenting Objects	56
Schema Creation	57
Table Creation	58
Table Manipulation	63
View Creation and Manipulation	68
Domain Creation and Manipulation	69
Trigger Creation	70
Routine Creation	72
Sequence Creation	74
SQL Procedure Statement	76
Other Schema Object Creation	76
The Information Schema	80
Predefined Character Sets, Collations and Domains	80
Views in INFORMATION SCHEMA	80
Visibility of Information	80
Name Information	80
Data Type Information	81
Product Information	81
Operations Information	81
SQL Standard Views	81
5. Text Tables	88
Overview	88
The Implementation	88
Definition of Tables	88

Scope and Reassignment	88
Null Values in Columns of Text Tables	89
Configuration	89
Disconnecting Text Tables	91
Text File Usage	91
Text File Global Properties	92
Transactions	93
6. Access Control	94
Overview	94
Authorizations and Access Control	94
Built-In Roles and Users	95
Listing Users and Roles	96
Access Rights	96
Statements for Authorization and Access Control	97
7. Data Access and Change	102
Overview	102
Cursors And Result Sets	102
Columns and Rows	102
Navigation	102
Updatability	103
Sensitivity	104
Holdability	104
Autocommit	104
JDBC Overview	104
JDBC Parameters	105
JDBC and Data Change Statements	105
JDBC Callable Statement	105
JDBC Returned Values	106
Cursor Declaration	106
Syntax Elements	106
Literals	106
References, etc.	110
Value Expression	111
Predicates	118
Aggregate Functions	124
Other Syntax Elements	126
Data Access Statements	127
Select Statement	128
Table	128
Subquery	128
Query Specification	129
Table Expression	129
Joined Table	132
Selection	134
Projection	134
Computed Columns	135
Naming	135
Grouping Operations	136
Aggregation	137
Set Operations	137
With Clause and Recursive Queries	137
Query Expression	138
Ordering	139
Slicing	140

Data Change Statements	141
Delete Statement	141
Truncate Statement	141
Insert Statement	142
Update Statement	143
Merge Statement	144
Diagnostics and State	146
8. SQL-Invoked Routines	147
Routine Definition	148
Routine Characteristics	150
SQL Language Routines (PSM)	152
Advantages and Disadvantages	152
Routine Statements	153
Compound Statement	154
Table Variables	154
Variables	155
Cursors	155
Handlers	156
Assignment Statement	157
Select Statement : Single Row	158
Formal Parameters	158
Iterated Statements	159
Iterated FOR Statement	159
Conditional Statements	160
Return Statement	161
Control Statements	162
Raising Exceptions	162
Routine Polymorphism	163
Returning Data From Procedures	164
Recursive Routines	165
Java Language Routines (SQL/JRT)	166
Polymorphism	167
Java Language Procedures	168
Java Static Methods	169
Legacy Support	170
Securing Access to Classes and Routines	170
Warning	171
User-Defined Aggregate Functions	171
Definition of Aggregate Functions	171
SQL PSM Aggregate Functions	172
Java Aggregate Functions	173
9. Triggers	175
Overview	175
BEFORE Triggers	175
AFTER Triggers	176
INSTEAD OF Triggers	176
Trigger Properties	176
Trigger Event	176
Granularity	176
Trigger Action Time	177
References to Rows	177
Trigger Condition	177
Trigger Action in SQL	177
Trigger Action in Java	178

Trigger Creation	179
10. Built In Functions	182
Overview	182
String and Binary String Functions	183
Numeric Functions	189
Date Time and Interval Functions	193
Functions to Report the Time Zone.	193
Functions to Report the Current Datetime	194
Functions to Extract an Element of a Datetime	195
Functions for Datetime Arithmetic	197
Functions to Convert or Format a Datetime	200
Array Functions	203
General Functions	204
System Functions	206
11. System Management	210
Mode of Operation and Tables	210
Mode of Operation	210
Database Types	210
Tables	211
Large Objects	211
Deployment context	212
ACID, Persistence and Reliability	212
Atomicity, Consistency, Isolation, Durability	213
System Operations	213
Backing Up and Restoring Database Catalogs	214
Making Online Backups	214
Offline Backup Utility Syntax	214
Making Offline Backups	215
Examining Backups	215
Restoring a Backup	215
Encrypted Databases	215
Creating and Accessing an Encrypted Database	215
Speed Considerations	216
Security Considerations	216
Monitoring Database Operations	216
External Statement Level Monitoring	216
Internal Statement Level Monitoring	217
Internal Event Monitoring	217
Log4J and JDK logging	217
Server Operation Monitoring	217
Database Security	217
Security Defaults	218
Authentication Control	218
Statements	219
System Operations	219
Database Settings	221
SQL Conformance Settings	224
Cache, Persistence and Files Settings	232
Authentication Settings	236
12. Compatibility With Other DBMS	238
Compatibility Overview	238
PostgreSQL Compatibility	238
MySQL Compatibility	239
Firebird Compatibility	241

Apache Derby Compatibility	241
Oracle Compatibility	241
DB2 Compatibility	242
MS SQLServer and Sybase Compatibility	242
13. Properties	243
Connection URL	243
Variables In Connection URL	244
Properties for Individual Connections	244
Properties for the Database	247
SQL Conformance Properties	248
Database Operations Properties	252
Database File and Memory Properties	253
Crypt Properties	259
System Properties	260
14. HyperSQL Network Listeners (Servers)	261
Listeners	261
HyperSQL Server	261
HyperSQL HTTP Server	261
HyperSQL HTTP Servlet	262
Server and Web Server Properties	262
Starting a Server from your Application	264
Shutting down a Server from your Application	264
Allowing a Connection to Open or Create a Database	264
Specifying Database Properties at Server Start	265
TLS Encryption	265
Requirements	265
Encrypting your JDBC connection	265
Making a Private-key Keystore	267
Automatic Server or WebServer startup on UNIX	268
Network Access Control	268
15. HyperSQL on UNIX	270
Purpose	270
Installation	270
Setting up Database Catalog and Listener	272
Accessing your Database	273
Create additional Accounts	277
Shutdown	277
Running Hsqldb as a System Daemon	277
Portability of hsqldb init script	278
Init script Setup Procedure	278
Troubleshooting the Init Script	282
Upgrading	283
16. Deployment Guide	284
Memory and Disk Use	284
Table Memory Allocation	284
Result Set Memory Allocation	284
Temporary Memory Use During Operations	285
Data Cache Memory Allocation	285
Object Pool Memory Allocation	285
Lob Memory Usage	286
Disk Space	286
Managing Database Connections	286
Application Development and Testing	287
Tweaking the Mode of Operation	288

Embedded Databases in Desktop Applications	288
Embedded Databases in Server Applications	288
Mixed Mode : Embedding a HyperSQL Server (Listener)	288
Using HyperSQL Without Logging Data Change	289
Bulk Inserts, Updates and Deletes	289
Using NIO File Access	289
Server Databases	290
Upgrading Databases	290
Upgrading From Older Versions	290
Manual Changes to the *.script File	291
Backward Compatibility Issues	292
HyperSQL Dependency Settings for Applications	293
What version to Pull	293
Using the HyperSQL Snapshot Repository	293
Range Versioning	295
A. Lists of Keywords	297
List of SQL Standard Keywords	297
List of SQL Keywords Disallowed as HyperSQL Identifiers	298
Special Function Keywords	299
B. Building HyperSQL Jars	300
Purpose	300
Building with Gradle	300
Invoking a Gradle Build Graphically	300
Invoking a Gradle Build from the Command Line	303
Using Gradle	304
Building with Ant	306
Obtaining Ant	306
Building Hsqldb with Ant	306
Building for Older JDKs	307
Building with IDE Compilers	307
Hsqldb CodeSwitcher	308
Building Documentation	309
C. HyperSQL with OpenOffice	311
HyperSQL with OpenOffice	311
Using OpenOffice / LibreOffice as a Database Tool	311
Converting .odb files to use with HyperSQL Server	311
D. HyperSQL File Links	312
SQL Index	314
General Index	320

List of Tables

1. Available formats of this document	xiii
10.1. TO_CHAR, TO_DATE and TO_TIMESTAMP format elements	202
13.1. Memory Database URL	243
13.2. File Database URL	243
13.3. Resource Database URL	243
13.4. Server Database URL	244
13.5. User and Password	245
13.6. Closing old ResultSet when Statement is reused	245
13.7. Column Names in JDBC ResultSet	245
13.8. Empty batch in JDBC PreparedStatement	246
13.9. Creating New Database	246
13.10. Automatic Shutdown	246
13.11. Validity Check Property	247
13.12. SQL Keyword Use as Identifier	248
13.13. SQL Keyword Starting with the Underscore or Containing Dollar Characters	248
13.14. Reference to Columns Names	248
13.15. String Size Declaration	248
13.16. Type Enforcement in Comparison and Assignment	248
13.17. Foreign Key Triggered Data Change	249
13.18. Use of LOB for LONGVAR Types	249
13.19. Type of string literals in CASE WHEN	249
13.20. Concatenation with NULL	249
13.21. NULL in Multi-Column UNIQUE Constraints	250
13.22. Truncation or Rounding in Type Conversion	250
13.23. Decimal Scale of Division and AVG Values	250
13.24. Support for NaN values	250
13.25. Sort order of NULL values	250
13.26. Sort order of NULL values with DESC	251
13.27. String comparison with padding	251
13.28. Case Insensitive Varchar columns	251
13.29. Storage of Live Java Objects	251
13.30. DB2 Style Syntax	251
13.31. MSSQL Style Syntax	252
13.32. MySQL Style Syntax	252
13.33. Oracle Style Syntax	252
13.34. PostgreSQL Style Syntax	252
13.35. Default Table Type	252
13.36. Transaction Control Mode	253
13.37. Default Isolation Level for Sessions	253
13.38. Transaction Rollback in Deadlock	253
13.39. Time Zone and Interval Types	253
13.40. Opening Database as Read Only	253
13.41. Opening Database Without Modifying the Files	254
13.42. Huge database files and tables	254
13.43. Event Logging	254
13.44. SQL Logging	254
13.45. Temporary Result Rows in Memory	255
13.46. Rows Cached In Memory	255
13.47. Rows Cached In Memory	255
13.48. Size of Rows Cached in Memory	255
13.49. Size Scale of Disk Table Storage	256

13.50. Size Scale of LOB Storage	256
13.51. Compression of BLOB and CLOB data	256
13.52. Internal Backup of Database Files	256
13.53. Use of Lock File	256
13.54. Logging Data Change Statements	257
13.55. Automatic Checkpoint Frequency	257
13.56. Automatic Defrag at Checkpoint	257
13.57. Compression of the .script file	257
13.58. Logging Data Change Statements Frequency	257
13.59. Logging Data Change Statements Frequency	258
13.60. Use of NIO for Disk Table Storage	258
13.61. Use of NIO for Disk Table Storage	258
13.62. Recovery Log Processing	258
13.63. Default Properties for TEXT Tables	258
13.64. Forcing Garbage Collection	259
13.65. Crypt Property For LOBs	259
13.66. Cipher Key for Encrypted Database	259
13.67. Crypt Provider Encrypted Database	259
13.68. Cipher Specification for Encrypted Database	259
13.69. Logging Framework	260
13.70. Text Tables	260
13.71. Java Functions	260
14.1. common server and webserver properties	262
14.2. server properties	263
14.3. webserver properties	263

List of Examples

1.1. Java code to connect to the local hsql Server	5
1.2. Java code to connect to the local http Server	5
1.3. Java code to connect to the local secure SSL hsql and http Servers	6
1.4. specifying a connection property to shutdown the database when the last connection is closed	7
1.5. specifying a connection property to disallow creating a new database	8
3.1. User-defined Session Variables	34
3.2. User-defined Temporary Session Tables	34
3.3. Setting Transaction Characteristics	40
3.4. Locking Tables	41
3.5. Rollback	42
3.6. Setting Session Characteristics	42
3.7. Setting Session Authorization	43
3.8. Setting Session Time Zone	43
4.1. inserting the next sequence value into a table row	49
4.2. numbering returned rows of a SELECT in sequential order	50
4.3. using the last value of a sequence	50
4.4. Column values which satisfy a 2-column UNIQUE constraint	53
11.1. Using CACHED tables for the LOB schema	212
11.2. Displaying DbBackup Syntax	214
11.3. Offline Backup Example	215
11.4. Listing a Backup with DbBackup	215
11.5. Restoring a Backup with DbBackup	215
11.6. SQL Log Example	222
11.7. Finding foreign key rows with no parents after a bulk import	232
14.1. Exporting certificate from the server's keystore	266
14.2. Adding a certificate to the client keystore	266
14.3. Specifying your own trust store to a JDBC client	266
14.4. Getting a pem-style private key into a JKS keystore	267
14.5. Validating and Testing an ACL file	269
15.1. example sqltool.rc stanza	279
16.1. Using CACHED tables for the LOB schema	286
16.2. MainInvoker Example	288
16.3. HyperSQL Snapshot Repository Definition	294
16.4. Sample Snapshot Ivy Dependency	294
16.5. Sample Snapshot Maven Dependency	294
16.6. Sample Snapshot Gradle Dependency	294
16.7. Sample Snapshot ivy.xml loaded by Ivyxml plugin	295
16.8. Sample Snapshot Groovy Dependency, using Grape	295
16.9. Sample Range Ivy Dependency	295
16.10. Sample Range Maven Dependency	295
16.11. Sample Range Gradle Dependency	295
16.12. Sample Range ivy.xml loaded by Ivyxml plugin	296
16.13. Sample Range Groovy Dependency, using Grape	296
B.1. Buiding the standard Hsqldb jar file with Ant	307
B.2. Example source code before CodeSwitcher is run	308
B.3. CodeSwitcher command line invocation	308
B.4. Source code after CodeSwitcher processing	308

Preface

HyperSQL DataBase (HSQLDB) is a modern relational database manager that conforms closely to the SQL:2011 Standard and JDBC 4 specifications. It supports all core features and many of the optional features of SQL:2008.

The first versions of HSQLDB were released in 2001. Version 2, first released in 2010, includes a complete rewrite of most parts of the database engine.

This documentation covers HyperSQL version 2.3.4. This documentation is regularly improved and updated. The latest, updated version can be found at <http://hsqldb.org/doc/2.0/>

If you notice any mistakes in this document, or if you have problems with the procedures themselves, please use the HSQLDB support facilities which are listed at <http://hsqldb.org/support>

Available formats for this document

This document is available in several formats.

You may be reading this document right now at <http://hsqldb.org/doc/2.0/>, or in a distribution somewhere else. I hereby call the document distribution from which you are reading this, your *current distro*.

<http://hsqldb.org/doc/2.0/> hosts the latest production versions of all available formats. If you want a different format of the same *version* of the document you are reading now, then you should try your current distro. If you want the latest production version, you should try <http://hsqldb.org/doc/2.0/>.

Sometimes, distributions other than <http://hsqldb.org/doc/2.0/> do not host all available formats. So, if you can't access the format that you want in your current distro, you have no choice but to use the newest production version at <http://hsqldb.org/doc/2.0/>.

Table 1. Available formats of this document

format	your distro	at http://hsqldb.org/doc/2.0
Chunked HTML	index.html	http://hsqldb.org/doc/2.0/guide/
All-in-one HTML	guide.html	http://hsqldb.org/doc/2.0/guide/guide.html
PDF	guide.pdf	http://hsqldb.org/doc/2.0/guide/guide.pdf

If you are reading this document now with a standalone PDF reader, the your distro links may not work.

Chapter 1. Running and Using HyperSQL

Fred Toussi, The HSQL Development Group

\$Revision: 5581 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Introduction

HyperSQL Database (HSQLDB) is a modern relational database system. Version 2.3 is the latest release of the all-new version 2 code. Written from ground up to follow the international ISO SQL:2011 standard, it supports the complete set of the classic features, together with optional features such as stored procedures and triggers.

HyperSQL is used for development, testing and deployment of database applications.

Standard compliance is the most unique characteristic of HyperSQL. There are several other distinctive features. HyperSQL can provide database access within the user's application process, within an application server, or as a separate server process. HyperSQL can run entirely in memory using dedicated fast memory structures as opposed to ram disk. HyperSQL can use disk persistence in a flexible way, with reliable crash-recovery. HyperSQL is the only open-source relational database management system with a high performance dedicated lob storage system, suitable for gigabytes of lob data. It is also the only relational database that can create and access large comma delimited files as SQL tables. HyperSQL supports three live switchable transaction control models, including fully multi threaded MVCC, and is suitable for high performance transaction processing applications. HyperSQL is also suitable for business intelligence, ETL and other applications that process large data sets. HyperSQL has a wide range of enterprise deployment options, such as XA transactions, connection pooling data sources and remote authentication.

New SQL syntax compatibility modes have been added to HyperSQL. These modes allow a high degree of compatibility with several other database systems which use non-standard SQL syntax.

HyperSQL is written in the Java programming language and runs in a Java virtual machine (JVM). It supports the JDBC interface for database access.

An ODBC driver is also available as a separate download.

This guide covers the database engine features, SQL syntax and different modes of operation. The Server, JDBC interfaces, pooling and XA components are documented in the JavaDoc. Utilities such as SqlTool and DatabaseManager are covered in a separate Utilities Guide.

The HSQLDB Jar

The HSQLDB jar package, hsqldb.jar, is located in the /lib directory of the ZIP package and contains several components and programs.

Components of the Hsqldb jar package

- HyperSQL RDBMS Engine (HSQLDB)
- HyperSQL JDBC Driver

- Database Manager (GUI database access tool, with Swing and AWT versions)

The HyperSQL RDBMS and JDBC Driver provide the core functionality. DatabaseManagers are general-purpose database access tools that can be used with any database engine that has a JDBC driver.

An additional jar, `sqltool.jar`, contains Sql Tool, command line database access tool. This is a general purpose command line database access tool that can be used with other database engines as well.

Running Database Access Tools

The tools are used for interactive user access to databases, including creation of a database, inserting or modifying data, or querying the database. All tools are run in the normal way for Java programs. In the following example the Swing version of the Database Manager is executed. The `hsqldb.jar` is located in the directory `../lib` relative to the current directory.

```
java -cp ../lib/hsqldb.jar org.hsqldb.util.DatabaseManagerSwing
```

If `hsqldb.jar` is in the current directory, the command would change to:

```
java -cp hsqldb.jar org.hsqldb.util.DatabaseManagerSwing
```

Main classes for the Hsqldb tools

- `org.hsqldb.util.DatabaseManager`
- `org.hsqldb.util.DatabaseManagerSwing`

When a tool is up and running, you can connect to a database (may be a new database) and use SQL commands to access and modify the data.

Tools can use command line arguments. You can add the command line argument `--help` to get a list of available arguments for these tools.

Double clicking the HSQLDB jar will start the DatabaseManagerSwing application.

A HyperSQL Database

Each HyperSQL database is called a catalog. There are three types of catalog depending on how the data is stored.

Types of catalog data

- *mem*: stored entirely in RAM - without any persistence beyond the JVM process's life
- *file*: stored in filesystem files
- *res*: stored in a Java resource, such as a Jar and always read-only

All-in-memory, *mem*: catalogs can be used for test data or as sophisticated caches for an application. These databases do not have any files.

A *file*: catalog consists of between 2 to 6 files, all named the same but with different extensions, located in the same directory. For example, the database named "test" consists of the following files:

- `test.properties`
- `test.script`

- `test.log`
- `test.data`
- `test.backup`
- `test.lob`

The properties file contains a few settings about the database. The script file contains the definition of tables and other database objects, plus the data for non-cached tables. The log file contains recent changes to the database. The data file contains the data for cached tables and the backup file is a compressed backup of the last known consistent state of the data file. All these files are essential and should never be deleted. For some catalogs, the `test.data` and `test.backup` files will not be present. In addition to those files, a HyperSQL database may link to any formatted text files, such as CSV lists, anywhere on the disk.

While the "test" catalog is open, a `test.log` file is used to write the changes made to data. This file is removed at a normal SHUTDOWN. Otherwise (with abnormal shutdown) this file is used at the next startup to redo the changes. A `test.lck` file is also used to record the fact that the database is open. This is deleted at a normal SHUTDOWN.



Note

When the engine closes the database at a shutdown, it creates temporary files with the extension `.new` which it then renames to those listed above. These files should not be deleted by the user. At the time of the next startup, all such files will be renamed or deleted by the database engine. In some circumstances, a `test.data.xxx.old` is created and deleted afterwards by the database engine. The user can delete these `test.data.xxx.old` files.

A *res*: catalog consists of the files for a small, read-only database that can be stored inside a Java resource such as a ZIP or JAR archive and distributed as part of a Java application program.

In-Process Access to Database Catalogs

In general, JDBC is used for all access to databases. This is done by making a connection to the database, then using various methods of the `java.sql.Connection` object that is returned to access the data. Access to an *in-process* database is started from JDBC, with the database path specified in the connection URL. For example, if the *file*: database name is "testdb" and its files are located in the same directory as where the command to run your application was issued, the following code is used for the connection:

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:file:testdb", "SA", "");
```

The database file path format can be specified using forward slashes in Windows hosts as well as Linux hosts. So relative paths or paths that refer to the same directory on the same drive can be identical. For example if your database directory in Linux is `/opt/db/` containing a database `testdb` (with files named `testdb.*`), then the database file path is `/opt/db/testdb`. If you create an identical directory structure on the C: drive of a Windows host, you can use the same URL in both Windows and Linux:

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:file:/opt/db/testdb", "SA", "");
```

When using relative paths, these paths will be taken relative to the directory in which the shell command to start the Java Virtual Machine was executed. Refer to the Javadoc for `JDBCConnection` for more details.

Paths and database names for file databases are treated as case-sensitive when the database is created or the first connection is made to the database. But if a second connection is made to an open database, using a path and name that differs only in case, then the connection is made to the existing open database. This measure is necessary because in Windows the two paths are equivalent.

A *mem:* database is specified by the *mem:* protocol. For *mem:* databases, the path is simply a name. Several *mem:* databases can exist at the same time and distinguished by their names. In the example below, the database is called "mymemdb":

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:mem:mymemdb", "SA", "");
```

A *res:* database, is specified by the *res:* protocol. As it is a Java resource, the database path is a Java URL (similar to the path to a class). In the example below, "resdb" is the root name of the database files, which exists in the directory "org/my/path" within the classpath (probably in a Jar). A Java resource is stored in a compressed format and is decompressed in memory when it is used. For this reason, a *res:* database should not contain large amounts of data and is always read-only.

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:res:org.my.path.resdb", "SA", "");
```

The first time *in-process* connection is made to a database, some general data structures are initialised and a few helper threads are started. After this, creation of connections and calls to JDBC methods of the connections execute as if they are part of the Java application that is making the calls. When the SQL command "SHUTDOWN" is executed, the global structures and helper threads for the database are destroyed.

Note that only one Java process at a time can make *in-process* connections to a given *file:* database. However, if the *file:* database has been made read-only, or if connections are made to a *res:* database, then it is possible to make *in-process* connections from multiple Java processes.

Server Modes

For most applications, *in-process* access is faster, as the data is not converted and sent over the network. The main drawback is that it is not possible by default to connect to the database from outside your application. As a result you cannot check the contents of the database with external tools such as Database Manager while your application is running.

Server modes provide the maximum accessibility. The database engine runs in a JVM and opens one or more *in-process* catalogs. It listens for connections from programs on the same computer or other computers on the network. It translates these connections into *in-process* connections to the databases.

Several different programs can connect to the server and retrieve or update information. Applications programs (clients) connect to the server using the HyperSQL JDBC driver. In most server modes, the server can serve an unlimited number of databases that are specified at the time of running the server, or optionally, as a connection request is received.

A Sever mode is also the preferred mode of running the database during development. It allows you to query the database from a separate database access utility while your application is running.

There are three server modes, based on the protocol used for communications between the client and server. They are briefly discussed below. More details on servers is provided in the [HyperSQL Network Listeners \(Servers\)](#) chapter.

HyperSQL HSQL Server

This is the preferred way of running a database server and the fastest one. A proprietary communications protocol is used for this mode. A command similar to those used for running tools and described above is used for running the server. The following example of the command for starting the server starts the server with one (default) database with files named "mydb.*" and the public name of "xdb". The public name hides the file names from users.

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.Server --database.0 file:mydb --dbname.0 xdb
```

The command line argument `--help` can be used to get a list of available arguments.

HyperSQL HTTP Server

This method of access is used when the computer hosting the database server is restricted to the HTTP protocol. The only reason for using this method of access is restrictions imposed by firewalls on the client or server machines and it should not be used where there are no such restrictions. The HyperSQL HTTP Server is a special web server that allows JDBC clients to connect via HTTP. The server can also act as a small general-purpose web server for static pages.

To run an HTTP server, replace the main class for the server in the example command line above with the following:

```
org.hsqldb.server.WebServer
```

The command line argument `--help` can be used to get a list of available arguments.

HyperSQL HTTP Servlet

This method of access also uses the HTTP protocol. It is used when a separate servlet engine (or application server) such as Tomcat or Resin provides access to the database. The Servlet Mode cannot be started independently from the servlet engine. The `Servlet` class, in the HSQLDB jar, should be installed on the application server to provide the connection. The database file path is specified using an application server property. Refer to the source file `src/org/hsqldb/server/Servlet.java` to see the details.

Both HTTP Server and Servlet modes can be accessed using the JDBC driver at the client end. They do not provide a web front end to the database. The Servlet mode can serve multiple databases.

Please note that you do not normally use this mode if you are using the database engine in an application server. In this situation, connections to a catalog are usually made *in-process*, or using a separate Server

Connecting to a Database Server

When a HyperSQL server is running, client programs can connect to it using the HSQLDB JDBC Driver contained in `hsqldb.jar`. Full information on how to connect to a server is provided in the Java Documentation for `JDBCConnection` (located in the `/doc/apidocs` directory of HSQLDB distribution). A common example is connection to the default port (9001) used for the *hsql:* protocol on the same machine:

Example 1.1. Java code to connect to the local hsql Server

```
try {
    Class.forName("org.hsqldb.jdbc.JDBCdriver" );
} catch (Exception e) {
    System.err.println("ERROR: failed to load HSQLDB JDBC driver.");
    e.printStackTrace();
    return;
}

Connection c = DriverManager.getConnection("jdbc:hsqldb:hsql://localhost/xdb", "SA", "");
```

If the HyperSQL HTTP server is used, the protocol is *http:* and the URL will be different:

Example 1.2. Java code to connect to the local http Server

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:http://localhost/xdb", "SA", "");
```

Note in the above connection URL, there is no mention of the database file, as this was specified when running the server. Instead, the public name defined for `dbname.0` is used. Also, see the [HyperSQL Network Listeners \(Servers\)](#) chapter for the connection URL when there is more than one database per server instance.

Security Considerations

When a HyperSQL server is run, network access should be adequately protected. Source IP addresses may be restricted by use of our Access Control List feature, network filtering software, firewall software, or standalone firewalls. Only secure passwords should be used-- most importantly, the password for the default system user should be changed from the default empty string. If you are purposefully providing data to the public, then the wide-open public network connection should be used exclusively to access the public data via read-only accounts. (i.e., neither secure data nor privileged accounts should use this connection). These considerations also apply to HyperSQL servers run with the HTTP protocol.

HyperSQL provides two optional security mechanisms. The encrypted SSL protocol, and Access Control Lists. Both mechanisms can be specified when running the Server or WebServer. On the client, the URL to connect to an SSL server is slightly different:

Example 1.3. Java code to connect to the local secure SSL hsql and http Servers

```
Connection c = DriverManager.getConnection("jdbc:hsql:hsqldb://localhost/xdm", "SA", "");
Connection c = DriverManager.getConnection("jdbc:hsql:https://localhost/xdm", "SA", "");
```

The security features are discussed in detail in the HyperSQL Network Listeners (Servers) chapter.

Using Multiple Databases

A server can provide connections to more than one database. In the examples above, more than one set of database names can be specified on the command line. It is also possible to specify all the databases in a `.properties` file, instead of the command line. These capabilities are covered in the HyperSQL Network Listeners (Servers) chapter

Accessing the Data

As shown so far, a `java.sql.Connection` object is always used to access the database. But the speed and performance depends on the type of connection.

Establishing a connection and closing it has some overheads, therefore it is not good practice to create a new connection to perform a small number of operations. A connection should be reused as much as possible and closed only when it is not going to be used again for a long while.

Reuse is more important for server connections. A server connection uses a TCP port for communications. Each time a connection is made, a port is allocated by the operating system and deallocated after the connection is closed. If many connections are made from a single client, the operating system may not be able to keep up and may refuse the connection attempt.

A `java.sql.Connection` object has some methods that return further `java.sql.*` objects. All these objects belong to the connection that returned them and are closed when the connection is closed. These objects can be reused, but if they are not needed after performing the operations, they should be closed.

A `java.sql.DatabaseMetaData` object is used to get metadata for the database.

A `java.sql.Statement` object is used to execute queries and data change statements. A `java.sql.Statement` can be reused to execute a different statement each time.

A `java.sql.PreparedStatement` object is used to execute a single statement repeatedly. The SQL statement usually contains parameters, which can be set to new values before each reuse. When a `java.sql.PreparedStatement` object is created, the engine keeps the compiled SQL statement for reuse, until the `java.sql.PreparedStatement` object is closed. As a result, repeated use of a `java.sql.PreparedStatement` is much faster than using a `java.sql.Statement` object.

A `java.sql.CallableStatement` object is used to execute an SQL CALL statement. The SQL CALL statement may contain parameters, which should be set to new values before each reuse. Similar to `java.sql.PreparedStatement`, the engine keeps the compiled SQL statement for reuse, until the `java.sql.CallableStatement` object is closed.

A `java.sql.Connection` object also has some methods for transaction control.

The `commit()` method performs a COMMIT while the `rollback()` method performs a ROLLBACK SQL statement.

The `setSavepoint(String name)` method performs a SAVEPOINT <name> SQL statement and returns a `java.sql.Savepoint` object. The `rollback(Savepoint name)` method performs a ROLLBACK TO SAVEPOINT <name> SQL statement.

The Javadoc for `JDBCConnection`, `JDBCDriver`, `JDBCDatabaseMetadata`, `JDBCResultSet`, `JDBCStatement`, `JDBCPreparedStatement` list all the supported JDBC methods together with information that is specific to HSQLDB.

Closing the Database

All databases running in different modes can be closed with the SHUTDOWN command, issued as an SQL statement.

When SHUTDOWN is issued, all active transactions are rolled back. The catalog files are then saved in a form that can be opened quickly the next time the catalog is opened.

A special form of closing the database is via the SHUTDOWN COMPACT command. This command rewrites the .data file that contains the information stored in CACHED tables and compacts it to its minimum size. This command should be issued periodically, especially when lots of inserts, updates or deletes have been performed on the cached tables. Changes to the structure of the database, such as dropping or modifying populated CACHED tables or indexes also create large amounts of unused file space that can be reclaimed using this command.

Databases are not closed when the last connection to the database is explicitly closed via JDBC. A connection property, `shutdown=true`, can be specified on the first connection to the database (the connection that opens the database) to force a shutdown when the last connection closes.

Example 1.4. specifying a connection property to shutdown the database when the last connection is closed

```
Connection c = DriverManager.getConnection(
    "jdbc:hsqldb:file:/opt/db/testdb;shutdown=true", "SA", "");
```

This feature is useful for running tests, where it may not be practical to shutdown the database after each test. But it is not recommended for application programs.

Creating a New Database

When a server instance is started, or when a connection is made to an *in-process* database, a new, empty database is created if no database exists at the given path.

With HyperSQL 2.0 the username and password that are specified for the connection are used for the new database. Both the username and password are case-sensitive. (The exception is the default SA user, which is not case-sensitive). If no username or password is specified, the default SA user and an empty password are used.

This feature has a side effect that can confuse new users. If a mistake is made in specifying the path for connecting to an existing database, a connection is nevertheless established to a new database. For troubleshooting purposes, you

can specify a connection property `ifexists=true` to allow connection to an existing database only and avoid creating a new database. In this case, if the database does not exist, the `getConnection()` method will throw an exception.

Example 1.5. specifying a connection property to disallow creating a new database

```
Connection c = DriverManager.getConnection(
    "jdbc:hsqldb:file:/opt/db/testdb;ifexists=true", "SA", "");
```

A database has many optional properties, described in the [System Management](#) chapter. You can specify most of these properties on the URL or in the connection properties for the first connection that creates the database. See the [Properties](#) chapter.

Chapter 2. SQL Language

Fred Toussi, The HSQL Development Group

\$Revision: 5575 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Standards Support

HyperSQL 2.x supports the dialect of SQL defined by SQL standards 92, 1999, 2003, 2008 and 2011. This means where a feature of the standard is supported, e.g. left outer join, the syntax is that specified by the standard text. Almost all syntactic features of SQL-92 up to Advanced Level are supported, as well as SQL:2011 core and many optional features of this standard. Work is in progress for a formal declaration of conformance.

At the time of this release, HyperSQL supports the widest range of SQL standard features among all open source RDBMS.

Various chapters of this guide list the supported syntax. When writing or converting existing SQL DDL (Data Definition Language), DML (Data Manipulation Language) or DQL (Data Query Language) statements for HSQLDB, you should consult the supported syntax and modify the statements accordingly. Some statements written for older versions may have to be modified.

Over 300 words are reserved by the standard and should not be used as table or column names. For example, the word POSITION is reserved as it is a function defined by the Standards with a similar role as `String.indexOf()` in Java. HyperSQL does not currently prevent you from using a reserved word if it does not support its use or can distinguish it. For example CUBE is a reserved words that is not currently supported by HyperSQL and is allowed as a table or column name. You should avoid using such names as future versions of HyperSQL are likely to support the reserved words and may reject your table definitions or queries. The full list of SQL reserved words is in the appendix Lists of Keywords .

There are several user-defined properties to control the strict application of the SQL Standard in different areas.

If you have to use a reserved keyword as the name of a database object, you can enclose it in double quotes.

HyperSQL also supports enhancements with keywords and expressions that are not part of the SQL standard. Expressions such as `SELECT TOP 5 FROM ...`, `SELECT LIMIT 0 10 FROM ...` or `DROP TABLE mytable IF EXISTS` are among such constructs.

Many print books cover SQL Standard syntax and can be consulted.

In HyperSQL version 2, all features of JDBC4 that apply to the capabilities of HSQLDB are fully supported. The relevant JDBC classes are thoroughly documented with additional clarifications and HyperSQL specific comments. See the [JavaDoc](#) for the `org.hsqldb.jdbc.*` classes.

SQL Data and Tables

In an SQL system, all significant data is stored in tables and sequence generators. Therefore, the first step in creating a database is defining the tables and their columns. The SQL standard supports temporary tables, which are for temporary data, and permanent base tables, which are for persistent data.

Temporary Tables

Data in `TEMPORARY` tables is not saved and lasts only for the lifetime of the session. The contents of each `TEMP` table is visible only from the session that is used to populate it.

HyperSQL supports two types of temporary tables.

The `GLOBAL TEMPORARY` type is a schema object. It is created with the `CREATE GLOBAL TEMPORARY TABLE` statement. The definition of the table persists, and each session has access to the table. But each session sees its own copy of the table, which is empty at the beginning of the session.

The `LOCAL TEMPORARY` type is not a schema object. It is created with the `DECLARE LOCAL TEMPORARY TABLE` statement. The table definition lasts only for the duration of the session and is not persisted in the database. The table can be declared in the middle of a transaction without committing the transaction. If a schema name is needed to reference these tables in a given SQL statement, the pseudo schema names `MODULE` or `SESSION` can be used.

When the session commits, the contents of all temporary tables are cleared by default. If the table definition statements includes `ON COMMIT PRESERVE ROWS`, then the contents are kept when a commit takes place.

The rows in temporary tables are stored in memory by default. If the `hsqldb.result_max_memory_rows` property has been set or the `SET SESSION RESULT MEMORY ROWS <row count>` has been specified, tables with row count above the setting are stored on disk.

Persistent Tables

HyperSQL supports the Standard definition of persistent base table, but defines three types according to the way the data is stored. These are `MEMORY` tables, `CACHED` tables and `TEXT` tables.

`MEMORY` tables are the default type when the `CREATE TABLE` command is used. Their data is held entirely in memory but any change to their structure or contents is written to the `*.log` and `*.script` files. The `*.script` file and the `*.log` file are read the next time the database is opened, and the `MEMORY` tables are recreated with all their contents. So unlike `TEMPORARY` tables, `MEMORY` tables are persistent. When the database is opened, all the data for the memory tables is read and inserted. This process may take a long time if the database is larger than tens of megabytes. When the database is shutdown, all the data is saved. This can also take a long time.

`CACHED` tables are created with the `CREATE CACHED TABLE` command. Only part of their data or indexes is held in memory, allowing large tables that would otherwise take up to several hundred megabytes of memory. Another advantage of cached tables is that the database engine takes less time to start up when a cached table is used for large amounts of data. The disadvantage of cached tables is a reduction in speed. Do not use cached tables if your data set is relatively small. In an application with some small tables and some large ones, it is better to use the default, `MEMORY` mode for the small tables.

`TEXT` tables use a CSV (Comma Separated Value) or other delimited text file as the source of their data. You can specify an existing CSV file, such as a dump from another database or program, as the source of a `TEXT` table. Alternatively, you can specify an empty file to be filled with data by the database engine. `TEXT` tables are efficient in memory usage as they cache only part of the text data and all of the indexes. The Text table data source can always be reassigned to a different file if necessary. The commands are needed to set up a `TEXT` table as detailed in the `Text Tables` chapter.

With all-in-memory databases, both `MEMORY` table and `CACHED` table declarations are treated as declarations for non-persistent memory tables. In the latest versions of HyperSQL, `TEXT` table declarations are allowed in all-in-memory databases.

The default type of tables resulting from future `CREATE TABLE` statements can be specified with the SQL command:

```
SET DATABASE DEFAULT TABLE TYPE { CACHED | MEMORY };
```

The type of an existing table can be changed with the SQL command:

```
SET TABLE <table name> TYPE { CACHED | MEMORY };
```

SQL statements access different types of tables uniformly. No change to statements is needed to access different types of table.

Short Guide to Data Types

Most other RDBMS do not conform to the SQL Standard in all areas, but they are gradually moving towards Standard conformance. When switching from another SQL dialect, the following should be considered:

- Numeric types TINYINT, SMALLINT, INTEGER and BIGINT are types with fixed binary precision. These types are more efficient to store and retrieve. NUMERIC and DECIMAL are types with user-defined decimal precision. They can be used with zero scale to store very large integers, or with a non-zero scale to store decimal fractions. The DOUBLE type is a 64 bit, approximate floating point types. HyperSQL even allows you to store infinity in this type.
- The BOOLEAN type is for logical values and can hold TRUE, FALSE or UNKNOWN. Although HyperSQL allows you to use one and zero in assignment or comparison, you should use the standard values for this type.
- Character string types are CHAR(L), VARCHAR(L) and CLOB. CHAR is for fixed width strings and any string that is assigned to this type is padded with spaces at the end. Do not use this type for general storage of strings. If you use CHAR without the length L, then it is interpreted as a single character string. Use VARCHAR(L) for general strings. There are only memory limits and performance implications for the maximum length of VARCHAR(L). If the strings are larger than a few kilobytes, consider using CLOB. The CLOB types is for very large strings. Do not use this type for short strings as there are performance implications. The CLOB type is a better choice for the storage of long strings. By default LONGVARCHAR is a synonym for a long VARCHAR and can be used without specifying the size. You can set LONGVARCHAR to map to CLOB, with the `sql.longvar_is_lob` connection property or the SET DATABASE SQL LONGVAR IS LOB TRUE statement.
- Binary string types are BINARY(L), VARBINARY(L) and BLOB. Do not use BINARY(L) unless you are storing keys such as UUID. This type pads short binary strings with zero bytes. BINARY without the length L means a single byte. Use VARBINARY(L) for general binary strings, and BLOB for large binary objects. You should apply the same considerations as with the character string types. By default LONGVARBINARY is a synonym for a long VARCHAR and can be used without specifying the size. You can set LONGVARBINARY to map to BLOB, with the `sql.longvar_is_lob` connection property or the SET DATABASE SQL LONGVAR IS LOB TRUE statement.
- The BIT(L) and BITVARYING(L) types are for bit maps. Do not use them for other types of data. BIT without the length L argument means a single bit and is sometimes used as a logical type. Use BOOLEAN instead of this type.
- The UUID type is for UUID (also called GUID) values. The value is stored as BINARY. UUID character strings, as well as BINARY strings, can be used to insert or to compare.
- The datetime types DATE, TIME and TIMESTAMP, together with their WITH TIME ZONE variations are available. Read the details in this chapter on how to use these types.
- The INTERVAL type is very powerful when used together with the datetime types. This is very easy to use, but is supported mainly by "big iron" database systems. Note that functions that add days or months to datetime values are not really a substitute for the INTERVAL type. Expressions such as `(datecol - 7 DAY) > CURRENT_DATE` are optimised to use indexes when it is possible, while the equivalent function calls are not optimised.
- The OTHER type is for storage of Java objects. If your objects are large, serialize them in your application and store them as BLOB in the database.
- The ARRAY type supports all base types except LOB and OTHER types. ARRAY data objects are held in memory while being processed. It is therefore not recommended to store more than about a thousand objects in an ARRAY

in normal operations with disk based databases. For specialised applications, use ARRAY with as many elements as your memory allocation can support.

HyperSQL 2.3 has several compatibility modes which allow the type names that are used by other RDBMS to be accepted and translated into the closest SQL Standard type. For example the type TEXT, supported by MySQL and PostgreSQL is translated in these compatibility modes.

Data Types and Operations

HyperSQL supports all the types defined by SQL-92, plus BOOLEAN, BINARY and LOB types that were later added to the SQL Standard. It also supports the non-standard OTHER type to store serializable Java objects.

SQL is a strongly typed language. All data stored in specific columns of tables and other objects (such as sequence generators) have specific types. Each data item conforms to the type limits such as precision and scale for the column. It also conforms to any additional integrity constraints that are defined as CHECK constraints in domains or tables. Types can be explicitly converted using the CAST expression, but in most expressions they are converted automatically.

Data is returned to the user (or the application program) as a result of executing SQL statements such as query expressions or function calls. All statements are compiled prior to execution and the return type of the data is known after compilation and before execution. Therefore, once a statement is prepared, the data type of each column of the returned result is known, including any precision or scale property. The type does not change when the same query that returned one row, returns many rows as a result of adding more data to the tables.

Some SQL functions used within SQL statements are polymorphic, but the exact type of the argument and the return value is determined at compile time.

When a statement is prepared, using a JDBC PreparedStatement object, it is compiled by the engine and the type of the columns of its ResultSet and / or its parameters are accessible through the methods of PreparedStatement.

Numeric Types

TINYINT, SMALLINT, INTEGER, BIGINT, NUMERIC and DECIMAL (without a decimal point) are the supported integral types. They correspond respectively to byte, short, int, long, BigDecimal and BigDecimal Java types in the range of values that they can represent (NUMERIC and DECIMAL are equivalent). The type TINYINT is an HSQLDB extension to the SQL Standard, while the others conform to the Standard definition. The SQL type dictates the maximum and minimum values that can be held in a field of each type. For example the value range for TINYINT is -128 to +127. The bit precision of TINYINT, SMALLINT, INTEGER and BIGINT is respectively 8, 16, 32 and 64. For NUMERIC and DECIMAL, decimal precision is used.

DECIMAL and NUMERIC with decimal fractions are mapped to java.math.BigDecimal and can have very large numbers of digits. In HyperSQL the two types are equivalent. These types, together with integral types, are called exact numeric types.

In HyperSQL, REAL, FLOAT, DOUBLE are equivalent and all mapped to double in Java. These types are defined by the SQL Standard as approximate numeric types. The bit-precision of all these types is 64 bits.

The decimal precision and scale of NUMERIC and DECIMAL types can be optionally defined. For example, DECIMAL(10,2) means maximum total number of digits is 10 and there are always 2 digits after the decimal point, while DECIMAL(10) means 10 digits without a decimal point. The bit-precision of FLOAT can be defined but it is ignored and the default bit-precision of 64 is used. The default precision of NUMERIC and DECIMAL (when not defined) is 100.

Note: If a database has been set to ignore type precision limits with the SET DATABASE SQL SIZE FALSE command, then a type definition of DECIMAL with no precision and scale is treated as DECIMAL(100,10). In normal operation, it is treated as DECIMAL(100).

Integral Types

In expressions, TINYINT, SMALLINT, INTEGER, BIGINT, NUMERIC and DECIMAL (without a decimal point) can be freely combined and no data narrowing takes place. The resulting value is of a type that can support all possible values.

If the SELECT statement refers to a simple column or function, then the return type is the type corresponding to the column or the return type of the function. For example:

```
CREATE TABLE t(a INTEGER, b BIGINT);
SELECT MAX(a), MAX(b) FROM t;
```

will return a `ResultSet` where the type of the first column is `java.lang.Integer` and the second column is `java.lang.Long`. However,

```
SELECT MAX(a) + 1, MAX(b) + 1 FROM t;
```

will return `java.lang.Long` and `BigDecimal` values, generated as a result of uniform type promotion for all the return values. Note that type promotion to `BigDecimal` ensures the correct value is returned if `MAX(b)` evaluates to `Long.MAX_VALUE`.

There is no built-in limit on the size of intermediate integral values in expressions. As a result, you should check for the type of the `ResultSet` column and choose an appropriate `getXXXX()` method to retrieve it. Alternatively, you can use the `getObject()` method, then cast the result to `java.lang.Number` and use the `intValue()` or `longValue()` methods on the result.

When the result of an expression is stored in a column of a database table, it has to fit in the target column, otherwise an error is returned. For example when `1234567890123456789012 / 1234567901234567890` is evaluated, the result can be stored in any integral type column, even a TINYINT column, as it is a small value.

In SQL Statements, an integer literal is treated as INTEGER, unless its value does not fit. In this case it is treated as BIGINT or DECIMAL, depending on the value.

Depending on the types of the operands, the result of the operation is returned in a JDBC `ResultSet` in any of the related Java types: `Integer`, `Long` or `BigDecimal`. The `ResultSet.getXXXX()` methods can be used to retrieve the values so long as the returned value can be represented by the resulting type. This type is deterministically based on the query, not on the actual rows returned.

Other Numeric Types

In SQL statements, number literals with a decimal point are treated as DECIMAL unless they are written with an exponent. Thus `0.2` is considered a DECIMAL value but `0.2E0` is considered a DOUBLE value.

When an approximate numeric type, REAL, FLOAT or DOUBLE (all synonymous) is part of an expression involving different numeric types, the type of the result is DOUBLE. DECIMAL values can be converted to DOUBLE unless they are beyond the `Double.MIN_VALUE - Double.MAX_VALUE` range. For example, `A * B`, `A / B`, `A + B`, etc. will return a DOUBLE value if either A or B is a DOUBLE.

Otherwise, when no DOUBLE value exists, if a DECIMAL or NUMERIC value is part an expression, the type of the result is DECIMAL or NUMERIC. Similar to integral values, when the result of an expression is assigned to a table column, the value has to fit in the target column, otherwise an error is returned. This means a small, 4 digit value of DECIMAL type can be assigned to a column of SMALLINT or INTEGER, but a value with 15 digits cannot.

When a DECIMAL value is multiplied by a DECIMAL or integral type, the resulting scale is the sum of the scales of the two terms. When they are divided, the result is a value with a scale (number of digits to the right of the decimal point) equal to the larger of the scales of the two terms. The precision for both operations is calculated (usually increased) to allow all possible results.

The distinction between `DOUBLE` and `DECIMAL` is important when a division takes place. For example, `10.0/8.0` (`DECIMAL`) equals `1.2` but `10.0E0/8.0E0` (`DOUBLE`) equals `1.25`. Without division operations, `DECIMAL` values represent exact arithmetic.

`REAL`, `FLOAT` and `DOUBLE` values are all stored in the database as `java.lang.Double` objects. Special values such as `NaN` and `+Infinity` are also stored and supported. These values can be submitted to the database via `JDBC PreparedStatement` methods and are returned in `ResultSet` objects. In order to allow division by zero of `DOUBLE` values in SQL statements (which returns `NaN` or `+Infinity`) you should set the property `hsqldb.double_nan` as `false` (`SET DATABASE SQL DOUBLE NAN FALSE`). The double values can be retrieved from a `ResultSet` in the required type so long as they can be represented. For setting the values, when `PreparedStatement.setDouble()` or `setFloat()` is used, the value is treated as a `DOUBLE` automatically.

In short,

```
<numeric type> ::= <exact numeric type> | <approximate numeric type>

<exact numeric type> ::= NUMERIC [ <left paren> <precision> [ <comma> <scale> ]
<right paren> ] | { DECIMAL | DEC } [ <left paren> <precision> [ <comma> <scale> ]
<right paren> ] | SMALLINT | INTEGER | INT | BIGINT

<approximate numeric type> ::= FLOAT [ <left paren> <precision> <right paren> ]
| REAL | DOUBLE PRECISION

<precision> ::= <unsigned integer>

<scale> ::= <unsigned integer>
```

Boolean Type

The `BOOLEAN` type conforms to the SQL Standard and represents the values `TRUE`, `FALSE` and `UNKNOWN`. This type of column can be initialised with Java boolean values, or with `NULL` for the `UNKNOWN` value.

The three-value logic is sometimes misunderstood. For example, `x IN (1, 2, NULL)` does not return true if `x` is `NULL`.

In previous versions of HyperSQL, `BIT` was simply an alias for `BOOLEAN`. In version 2, `BIT` is a single-bit bit map.

```
<boolean type> ::= BOOLEAN
```

The SQL Standard does not support type conversion to `BOOLEAN` apart from character strings that consists of boolean literals. Because the `BOOLEAN` type is relatively new to the Standard, several database products used other types to represent boolean values. For improved compatibility, HyperSQL allows some type conversions to boolean.

Values of `BIT` and `BIT VARYING` types with length 1 can be converted to `BOOLEAN`. If the bit is set, the result of conversion is the `TRUE` value, otherwise it is `FALSE`.

Values of `TINYINT`, `SMALLINT`, `INTEGER` and `BIGINT` types can be converted to `BOOLEAN`. If the value is zero, the result is the `FALSE` value, otherwise it is `TRUE`.

Character String Types

The `CHARACTER`, `CHARACTER VARYING` and `CLOB` types are the SQL Standard character string types. `CHAR`, `VARCHAR` and `CHARACTER LARGE OBJECT` are synonyms for these types. HyperSQL also supports `LONGVARCHAR` as a synonym for `VARCHAR`. If `LONGVARCHAR` is used without a length, then a length of 16M is assigned. You can set `LONGVARCHAR` to map to `CLOB`, with the `sql.longvar_is_lob` connection property or the `SET DATABASE SQL LONGVAR IS LOB TRUE` statement..

HyperSQL's default character set is Unicode, therefore all possible character strings can be represented by these types.

The SQL Standard behaviour of the CHARACTER type is a remnant of legacy systems in which character strings are padded with spaces to fill a fixed width. These spaces are sometimes significant while in other cases they are silently discarded. It would be best to avoid the CHARACTER type altogether. With the rest of the types, the strings are not padded when assigned to columns or variables of the given type. The trailing spaces are still considered discardable for all character types. Therefore if a string with trailing spaces is too long to assign to a column or variable of a given length, the spaces beyond the type length are discarded and the assignment succeeds (provided all the characters beyond the type length are spaces).

The VARCHAR and CLOB types have length limits, but the strings are not padded by the system. Note that if you use a large length for a VARCHAR or CLOB type, no extra space is used in the database. The space used for each stored item is proportional to its actual length.

If CHARACTER is used without specifying the length, the length defaults to 1. For the CLOB type, the length limit can be defined in units of kilobyte (K, 1024), megabyte (M, 1024 * 1024) or gigabyte (G, 1024 * 1024 * 1024), using the <multiplier>. If CLOB is used without specifying the length, the length defaults to 1GB.

```
<character string type> ::= { CHARACTER | CHAR } [ <left paren> <character length> <right paren> ] | { CHARACTER VARYING | CHAR VARYING | VARCHAR } <left paren> <character length> <right paren> | LONGVARCHAR [ <left paren> <character length> <right paren> ] | <character large object type>
```

```
<character large object type> ::= { CHARACTER LARGE OBJECT | CHAR LARGE OBJECT | CLOB } [ <left paren> <character large object length> <right paren> ]
```

```
<character length> ::= <unsigned integer> [ <char length units> ]
```

```
<large object length> ::= <length> [ <multiplier> ] | <large object length token>
```

```
<character large object length> ::= <large object length> [ <char length units> ]
```

```
<large object length token> ::= <digit>... <multiplier>
```

```
<multiplier> ::= K | M | G
```

```
<char length units> ::= CHARACTERS | OCTETS
```

Each character type has a collation. This is either a default collation or stated explicitly with the COLLATE clause. Collations are discussed in the [Schemas and Database Objects](#) chapter.

```
CHAR(10)
CHARACTER(10)
VARCHAR(2)
CHAR VARYING(2)
CLOB(1000)
CLOB(30K)
CHARACTER LARGE OBJECT(1M)
LONGVARCHAR
```

Binary String Types

The BINARY, BINARY VARYING and BLOB types are the SQL Standard binary string types. VARBINARY and BINARY LARGE OBJECT are synonyms for BINARY VARYING and BLOB types. HyperSQL also supports LONGVARBINARY as a synonym for VARBINARY. You can set LONGVARBINARY to map to BLOB, with the `sql.longvar_is_lob` connection property or the `SET DATABASE SQL LONGVAR IS LOB TRUE` statement.

Binary string types are used in a similar way to character string types. There are several built-in functions that are overloaded to support character, binary and bit strings.

The BINARY type represents a fixed width-string. Each shorter string is padded with zeros to fill the fixed width. Similar to the CHARACTER type, the trailing zeros in the BINARY string are simply discarded in some operations. For the same reason, it is best to avoid this particular type and use VARBINARY instead.

When two binary values are compared, if one is of BINARY type, then zero padding is performed to extend the length of the shorter string to the longer one before comparison. No padding is performed with other binary types. If the bytes compare equal to the end of the shorter value, then the longer string is considered larger than the shorter string.

If BINARY is used without specifying the length, the length defaults to 1. For the BLOB type, the length limit can be defined in units of kilobyte (K, 1024), megabyte (M, 1024 * 1024) or gigabyte (G, 1024 * 1024 * 1024), using the <multiplier>. If BLOB is used without specifying the length, the length defaults to 1GB.

The UUID type represents a UUID string. The type is similar to BINARY(16) but with the extra enforcement that disallows assigning, casting or comparing with shorter or longer strings. Strings such as '24ff1824-01e8-4dac-8eb3-3fee32ad2b9c' or '24ff182401e84dac8eb33fee32ad2b9c' are allowed. When a value of the UUID type is converted to a CHARACTER type, the hyphens are inserted in the required positions.

```
<binary string type> ::= BINARY [ <left paren> <length> <right paren> ] | { BINARY
VARYING | VARBINARY } <left paren> <length> <right paren> | LONGVARBINARY [ <left
paren> <length> <right paren> ] | UUID | <binary large object string type>
```

```
<binary large object string type> ::= { BINARY LARGE OBJECT | BLOB } [ <left
paren> <large object length> <right paren> ]
```

```
<length> ::= <unsigned integer>
```

```
BINARY(10)
VARBINARY(2)
BINARY VARYING(2)
BLOB(1000)
BLOB(30G)
BINARY LARGE OBJECT(1M)
LONGVARBINARY
```

Bit String Types

The BIT and BIT VARYING types are the supported bit string types. These types were defined by SQL:1999 but were later removed from the Standard. Bit types represent bit maps of given lengths. Each bit is 0 or 1. The BIT type represents a fixed width-string. Each shorter string is padded with zeros to fill the fixed width. If BIT is used without specifying the length, the length defaults to 1. The BIT VARYING type has a maximum width and shorter strings are not padded.

Before the introduction of the BOOLEAN type to the SQL Standard, a single-bit string of the type BIT(1) was commonly used. For compatibility with other products that do not conform to, or extend, the SQL Standard, HyperSQL allows values of BIT and BIT VARYING types with length 1 to be converted to and from the BOOLEAN type. BOOLEAN TRUE is considered equal to B'1', BOOLEAN FALSE is considered equal to B'0'.

For the same reason, numeric values can be assigned to columns and variables of the type BIT(1). For assignment, the numeric value zero is converted to B'0', while all other values are converted to B'1'. For comparison, numeric values 1 is considered equal to B'1' and numeric value zero is considered equal to B'0'.

It is not allowed to perform other arithmetic or boolean operations involving BIT(1) and BIT VARYING(1). The kind of operations allowed on bit strings are analogous to those allowed on BINARY and CHARACTER strings. Several built-in functions support all three types of string.

```
<bit string type> ::= BIT [ <left paren> <length> <right paren> ] | BIT VARYING
<left paren> <length> <right paren>
```

```
BIT  
BIT(10)  
BIT VARYING(2)
```

Lob Data

BLOB and CLOB are lob types. These types are used for very long strings that do not necessarily fit in memory. Small lobes that fit in memory can be accessed just like BINARY or VARCHAR column data. But lobes are usually much larger and therefore accessed with special JDBC methods.

To insert a lob into a table, or to update a column of lob type with a new lob, you can use the `setBinaryStream()` and `setCharacterStream()` methods of JDBC `java.sql.PreparedStatement`. These are very efficient methods for long lobes. Other methods are also supported. If the data for the BLOB or CLOB is already a memory object, you can use the `setBytes()` or `setString()` methods, which are efficient for memory data. Another method is to obtain a lob with the `getBlob()` and `getClob()` methods of `java.sql.Connection`, populate its data, then use the `setBlob()` or `setClob()` methods of `PreparedStatement`. Yet another method allows to create instances of `org.hsqldb.jdbc.JDBCBlobFile` and `org.hsqldb.jdbc.JDBCClobFile` and construct a large lob for use with `setBlob()` and `setClob()` methods.

A lob is retrieved from a `ResultSet` with the `getBlob()` or `getClob()` method. The streaming methods of the lob objects are then used to access the data. HyperSQL also allows efficient access to chunks of lobes with `getBytes()` or `getString()` methods. Furthermore, parts of a BLOB or CLOB already stored in a table can be modified. An updatable `ResultSet` is used to select the row from the table. The `getBlob()` or `getClob()` methods of `ResultSet` are used to access the lob as a `java.sql.Blob` or `java.sql.Clob` object. The `getBytes()` and `getString()` methods of these objects can be used to modify the lob. Finally the `updateRow()` method of the `ResultSet` is used to update the lob in the row. Note these modifications are not allowed with compressed or encrypted lobes.

Lobes are logically stored in columns of tables. Their physical storage is a separate *.lobs file. This file is created as soon as a BLOB or CLOB is inserted into the database. The file will grow as new lobes are inserted into the database. In version 2, the *.lobs file is never deleted even if all lobes are deleted from the database. In this case you can delete the *.lobs file after a SHUTDOWN. When a CHECKPOINT happens, the space used for deleted lobes is freed and is reused for future lobes. By default, clobes are stored without compression. You can use a database setting to enable compression of clobes. This can significantly reduce the storage size of clobes.

Storage and Handling of Java Objects

From version 2.3.4 there are two options for storing Java Objects.

The default option allows storing Serializable object. The objects remain serialized inside the database until they are retrieved. The application program that retrieves the object must include in its classpath the Java Class for the object, otherwise it cannot retrieve the object.

Any serializable Java Object can be inserted directly into a column of type OTHER using any variation of `PreparedStatement.setObject()` methods.

The alternative Live Object option is for mem: databases only and is enabled when the database property `sql.live_object=true` is appended to the connection property that creates the mem database. For example `'jdbc:hsqldb:mem:mydb;sql.live_object=true'`. With this option, any Java object can be stored as it is not serialized. The SQL statement `SET DATABASE SQL LIVE OBJECT TRUE` can be also used. Note the SQL statement must be executed on the first connection to the database before any data is inserted. No data access should be made from this connection. Instead, new connections should be used for data access.

For comparison purposes and in indexes, any two Java Objects are considered equal unless one of them is NULL. You cannot search for a specific object or perform a join on a column of type OTHER.

Java Objects can simply be stored internally and no operations can be performed on them other than assignment between columns of type OTHER or checking for NULL. Tests such as `WHERE object1 = object2` do not mean what you might expect, as any non-null object would satisfy such a tests. But `WHERE object1 IS NOT NULL` is perfectly acceptable.

The engine does not allow normal column values to be assigned to Java Object columns (for example, assigning an INTEGER or STRING to such a column with an SQL statement such as `UPDATE mytable SET objectcol = intcol WHERE ...`).

```
<java object type> ::= OTHER
```

The default method of storage is used when the objects and their state needs to be saved and retrieved in the future. This method is also used when memory resources are limited and collections of objects are stored and retrieved only when needed.

The Live Object option uses the database table as a collection of objects. This allows storing some attributes of the objects in the same table alongside the object itself and fast search and retrieval of objects on their attributes. For example when many thousands of live objects contain details of films, The film title and the director can be stored in the table and searches can be performed for films on these attributes:

```
CREATE TABLE movies (director VARCHAR(30), title VARCHAR(40), obj OTHER)
SELECT obj FROM movies WHERE director LIKE 'Luc%'
```

In any case, at least one attribute of the object should be stored to allow efficient retrieval of the objects from both Live Object and Serialized storage. Often an id number is used as the attribute.

Type Length, Precision and Scale

In older version of HyperSQL, all table column type definitions with a column length, precision or scale qualifier were accepted and ignored. HSQLDB 1.8 enforced correctness but included an option to enforce the length, precision or scale.

In HyperSQL 2, length, precision and scale qualifiers are always enforced. For backward compatibility, when older databases which had the property `hsqldb.enforce_strict_size=false` are converted to version 2, this property is retained. However, this is a temporary measure. You should test your application to ensure the length, precision and scale that is used for column definitions is appropriate for the application data. You can test with the default database setting, which enforces the sizes.

String types, including all BIT, BINARY and CHAR string types plus CLOB and BLOB, are generally defined with a length. If no length is specified for BIT, BINARY and CHAR, the default length is 1. For CLOB and BLOB an implementation defined length of 1M is used.

TIME and TIMESTAMP types can be defined with a fractional second precision between 0 and 9. INTERVAL type definition may have precision and, in some cases, fraction second precision. DECIMAL and NUMERIC types may be defined with precision and scale. For all of these types a default precision or scale value is used if one is not specified. The default scale is 0. The default fractional precision for TIME is 0, while it is 6 for TIMESTAMP.

Values can be converted from one type to another in two different ways: by using explicit CAST expression or by implicit conversion used in assignment, comparison and aggregation.

String values cannot be assigned to VARCHAR columns if they are longer than the defined type length. For CHARACTER columns, a long string can be assigned (with truncation) only if all the characters after the length are spaces. Shorter strings are padded with the space character when inserted into a CHARACTER column. Similar rules are applied to VARBINARY and BINARY columns. For BINARY columns, the padding and truncation rules are applied with zero bytes, instead of spaces.

Explicit CAST of a value to a CHARACTER or VARCHAR type will result in forced truncation or padding. So a test such as `CAST (mycol AS VARCHAR(2)) = 'xy'` will find the values beginning with 'xy'. This is the equivalent of `SUBSTRING(mycol FROM 1 FOR 2) = 'xy'`.

For all numeric types, the rules of explicit cast and implicit conversion are the same. If cast or conversion causes any digits to be lost from the fractional part, it can take place. If the non-fractional part of the value cannot be represented in the new type, cast or conversion cannot take place and will result in a data exception.

There are special rules for DATE, TIME, TIMESTAMP and INTERVAL casts and conversions.

Datetime types

HSQldb fully supports datetime and interval types and operations, including all relevant optional features, as specified by the SQL Standard since SQL-92. The two groups of types are complementary.

The DATE type represents a calendar date with YEAR, MONTH and DAY fields.

The TIME type represents time of day with HOUR, MINUTE and SECOND fields, plus an optional SECOND FRACTION field.

The TIMESTAMP type represents the combination of DATE and TIME types.

TIME and TIMESTAMP types can include WITH TIME ZONE or WITHOUT TIME ZONE (the default) qualifiers. They can have fractional second parts. For example, TIME(6) has six fractional digits for the second field.

If fractional second precision is not specified, it defaults to 0 for TIME and to 6 for TIMESTAMP.

```
<datetime type> ::= DATE | TIME [ <left paren> <time precision> <right paren> ]
[ <with or without time zone> ] | TIMESTAMP [ <left paren> <timestamp precision>
<right paren> ] [ <with or without time zone> ]
```

```
<with or without time zone> ::= WITH TIME ZONE | WITHOUT TIME ZONE
```

```
<time precision> ::= <time fractional seconds precision>
```

```
<timestamp precision> ::= <time fractional seconds precision>
```

```
<time fractional seconds precision> ::= <unsigned integer>
```

```
DATE
TIME(6)
TIMESTAMP(2) WITH TIME ZONE
```

Examples of the string literals used to represent date time values, some with time zone, some without, are below:

```
DATE '2008-08-22'
TIMESTAMP '2008-08-08 20:08:08'
TIMESTAMP '2008-08-08 20:08:08+8:00' /* Beijing */
TIME '20:08:08.034900'
TIME '20:08:08.034900-8:00' /* US Pacific */
```

Time Zone

DATE values do not take time zones. For example United Nations designates 5 June as World Environment Day, which was observed on DATE '2008-06-05' in different time zones.

TIME and TIMESTAMP values without time zone, usually have a context that indicates some local time zone. For example, a database for college course timetables usually stores class dates and times without time zones. This works

because the location of the college is fixed and the time zone displacement is the same for all the values. Even when the events take place in different time zones, for example international flight times, it is possible to store all the datetime information as references to a single time zone, usually GMT. For some databases it may be useful to store the time zone displacement together with each datetime value. SQL's TIME WITH TIME ZONE and TIMESTAMP WITH TIME ZONE values include a time zone displacement value.

The time zone displacement is of the type INTERVAL HOUR TO MINUTE. This data type is described in the next section. The legal values are between '-14:00' and '+14:00'.

Operations on Datetime Types

The expression `<datetime expression> AT TIME ZONE <time displacement>` evaluates to a datetime value representing exactly the same point of time in the specified `<time displacement>`. The expression, `AT LOCAL` is equivalent to `AT TIME ZONE <local time displacement>`. If `AT TIME ZONE` is used with a datetime operand of type `WITHOUT TIME ZONE`, the operand is first converted to a value of type `WITH TIME ZONE` at the session's time displacement, then the specified time zone displacement is set for the value. Therefore, in these cases, the final value depends on the time zone of the session in which the statement was used.

`AT TIME ZONE`, modifies the field values of the datetime operand. This is done by the following procedure:

1. determine the corresponding datetime at UTC.
2. find the datetime value at the given time zone that corresponds with the UTC value from step 1.

Example a:

```
TIME '12:00:00' AT TIME ZONE INTERVAL '1:00' HOUR TO MINUTE
```

If the session's time zone displacement is '-8:00', then in step 1, `TIME '12:00:00'` is converted to UTC, which is `TIME '20:00:00+0:00'`. In step 2, this value is expressed as `TIME '21:00:00+1:00'`.

Example b:

```
TIME '12:00:00-5:00' AT TIME ZONE INTERVAL '1:00' HOUR TO MINUTE
```

Because the operand has a time zone, the result is independent of the session time zone displacement. Step 1 results in `TIME '17:00:00+0:00'`, and step 2 results in `TIME '18:00:00+1:00'`

Note that the operand is not limited to datetime literals used in these examples. Any valid expression that evaluates to a datetime value can be the operand.

Type Conversion

`CAST` is used for all other conversions. Examples:

```
CAST (<value> AS TIME WITHOUT TIME ZONE)
CAST (<value> AS TIME WITH TIME ZONE)
```

In the first example, if `<value>` has a time zone component, it is simply dropped. For example `TIME '12:00:00-5:00'` is converted to `TIME '12:00:00'`

In the second example, if `<value>` has no time zone component, the current time zone displacement of the session is added. For example `TIME '12:00:00'` is converted to `TIME '12:00:00-8:00'` when the session time zone displacement is '-8:00'.

Conversion between `DATE` and `TIMESTAMP` is performed by removing the `TIME` component of a `TIMESTAMP` value or by setting the hour, minute and second fields to zero. `TIMESTAMP '2008-08-08 20:08:08+8:00'` becomes `DATE '2008-08-08'`, while `DATE '2008-08-22'` becomes `TIMESTAMP '2008-08-22 00:00:00'`.

Conversion between TIME and TIMESTAMP is performed by removing the DATE field values of a TIMESTAMP value or by appending the fields of the TIME value to the fields of the current session date value.

Assignment

When a value is assigned to a datetime target, e.g., a value is used to update a row of a table, the type of the value must be the same as the target, but the WITH TIME ZONE or WITHOUT TIME ZONE characteristics can be different. If the types are not the same, an explicit CAST must be used to convert the value into the target type.

Comparison

When values WITH TIME ZONE are compared, they are converted to UTC values before comparison. If a value WITH TIME ZONE is compared to another WITHOUT TIME ZONE, then the WITH TIME ZONE value is converted to AT LOCAL, then converted to WITHOUT TIME ZONE before comparison.

It is not recommended to design applications that rely on comparisons and conversions between TIME values WITH TIME ZONE. The conversions may involve normalisation of the time value, resulting in unexpected results. For example, the expression: BETWEEN(TIME '12:00:00-8:00', TIME '22:00:00-8:00') is converted to BETWEEN(TIME '20:00:00+0:00', TIME '06:00:00+0:00') when it is evaluated in the UTC zone, which is always FALSE.

Functions

Several functions return the current session timestamp in different datetime types:

CURRENT_DATE	DATE
CURRENT_TIME	TIME WITH TIME ZONE
CURRENT_TIMESTAMP	TIMESTAMP WITH TIME ZONE
LOCALTIME	TIME WITHOUT TIME ZONE
LOCALTIMESTAMP	TIMESTAMP WITHOUT TIME ZONE

HyperSQL supports a very extensive range of functions for conversion, extraction and manipulation of DATE and TIMESTAMP values. See the [Built In Functions](#) chapter.

Session Time Zone Displacement

When an SQL session is started (with a JDBC connection) the local time zone of the client JVM (including any seasonal time adjustments such as daylight saving time) is used as the session time zone displacement. Note that the SQL session time displacement is not changed when a seasonal time adjustment takes place while the session is open. To change the SQL session time zone displacement use the following commands:

```
SET TIME ZONE <time displacement>
```

```
SET TIME ZONE LOCAL
```

The first command sets the displacement to the given value. The second command restores the original, real time zone displacement of the session.

Datetime Values and Java

When datetime values are sent to the database using the PreparedStatement or CallableStatement interfaces, the Java object is converted to the type of the prepared or callable statement parameter. This type may be DATE, TIME, or TIMESTAMP (with or without time zone). The time zone displacement is the time zone of the JDBC session.

When datetime values are retrieved from the database using the ResultSet interface, there are two representations. The getString(...) methods of the ResultSet interface, return an exact representation of the value in the SQL

type as it is stored in the database. This includes the correct number of digits for the fractional second field, and for values with time zone displacement, the time zone displacement. Therefore if TIME '12:00:00' is stored in the database, all users in different time zones will get '12:00:00' when they retrieve the value as a string. The `getTime(...)` and `getTimestamp(...)` methods of the `ResultSet` interface return Java objects that are corrected for the session time zone. The UTC millisecond value contained the `java.sql.Time` or `java.sql.Timestamp` objects will be adjusted to the time zone of the session, therefore the `toString()` method of these objects return the same values in different time zones.

If you want to store and retrieve UTC values that are independent of any session's time zone, you can use a `TIMESTAMP WITH TIME ZONE` column. The `setTime(...)` and `setTimestamp(...)` methods of the `PreparedStatement` interface which have a `Calendar` parameter can be used to assign the values. The time zone of the given `Calendar` argument is used as the time zone. Conversely, the `getTime(...)` and `getTimestamp(...)` methods of the `ResultSet` interface which have a `Calendar` parameter can be used with a `Calendar` argument to retrieve the values.

JDBC has an unfortunate limitation and does not include type codes for SQL datetime types that have a `TIME ZONE` property. Therefore, for compatibility with database tools that are limited to the JDBC type codes, HyperSQL reports these types by default as datetime types without `TIME ZONE`. You can use the URL property `hsqldb.translate_dti_types=false` to override the default behaviour.

Non-Standard Extensions

HyperSQL version 2.3.0 supports some extensions to the SQL standard treatment of datetime and interval types. For example, the Standard expression to add a number of days to a date has an explicit `INTERVAL` value but `HSQldb` also allows an integer to be used without specifying `DAY`. Examples of some Standard expressions and their non-standard alternatives are given below:

```
-- standard forms
CURRENT_DATE + '2' DAY
SELECT (LOCALTIMESTAMP - atimestampcolumn) DAY TO SECOND FROM atable

-- non-standard forms
CURRENT_DATE + 2
SELECT LOCALTIMESTAMP - atimestampcolumn FROM atable
```

It is recommended to use the SQL Standard syntax as it is more precise and avoids ambiguity.

Interval Types

Interval types are used to represent differences between date time values. The difference between two date time values can be measured in seconds or in months. For measurements in months, the units `YEAR` and `MONTH` are available, while for measurements in seconds, the units `DAY`, `HOURL`, `MINUTE`, `SECOND` are available. The units can be used individually, or as a range. An interval type can specify the precision of the most significant field and the second fraction digits of the `SECOND` field (if it has a `SECOND` field). The default precision is 2. The default second precision is 0.

```
<interval type> ::= INTERVAL <interval qualifier>
```

```
<interval qualifier> ::= <start field> TO <end field> | <single datetime field>
```

```
<start field> ::= <non-second primary datetime field> [ <left paren> <interval leading field precision> <right paren> ]
```

```
<end field> ::= <non-second primary datetime field> | SECOND [ <left paren> <interval fractional seconds precision> <right paren> ]
```

```
<single datetime field> ::= <non-second primary datetime field> [ <left paren> <interval leading field precision> <right paren> ] | SECOND [ <left paren>
```

```
<interval leading field precision> [ <comma> <interval fractional seconds precision> ] <right paren> ]
```

```
<primary datetime field> ::= <non-second primary datetime field> | SECOND
```

```
<non-second primary datetime field> ::= YEAR | MONTH | DAY | HOUR | MINUTE
```

```
<interval fractional seconds precision> ::= <unsigned integer>
```

```
<interval leading field precision> ::= <unsigned integer>
```

Examples of INTERVAL type definition:

```
INTERVAL YEAR TO MONTH
INTERVAL YEAR(3)
INTERVAL DAY(4) TO HOUR
INTERVAL MINUTE(4) TO SECOND(6)
INTERVAL SECOND(4,6)
```

The word INTERVAL indicates the general type name. The rest of the definition is called an `<interval qualifier>`. This designation is important, as in most expressions `<interval qualifier>` is used without the word INTERVAL.

Interval Values

An interval value can be negative, positive or zero. An interval type has all the datetime fields in the specified range. These fields are similar to those in the TIMESTAMP type. The differences are as follows:

The first field of an interval value can hold any numeric value up to the specified precision. For example, the hour field in HOUR(2) TO SECOND can hold values above 23 (up to 99). The year and month fields can hold zero (unlike a TIMESTAMP value) and the maximum value of a month field that is not the most significant field, is 11.

The standard function ABS(`<interval value expression>`) can be used to convert a negative interval value to a positive one.

The literal representation of interval values consists of the type definition, with a string representing the interval value inserted after the word INTERVAL. Some examples of interval literal below:

```
INTERVAL '145 23:12:19.345' DAY(3) TO SECOND(3)
INTERVAL '3503:12:19.345' HOUR TO SECOND(3) /* equal to the first value */
INTERVAL '19.345' SECOND(4,3) /* maximum number of digits for the second value is 4, and each value is expressed with three fraction digits. */
INTERVAL '-23-10' YEAR(2) TO MONTH
```

Interval values of the types that are based on seconds can be cast into one another. Similarly those that are based on months can be cast into one another. It is not possible to cast or convert a value based on seconds to one based on months, or vice versa.

When a cast is performed to a type with a smaller least-significant field, nothing is lost from the interval value. Otherwise, the values for the missing least-significant fields are discarded. Examples:

```
CAST ( INTERVAL '145 23:12:19' DAY TO SECOND AS INTERVAL DAY TO HOUR ) = INTERVAL '145 23' DAY TO HOUR
CAST(INTERVAL '145 23' DAY TO HOUR AS INTERVAL DAY TO SECOND) = INTERVAL '145 23:00:00' DAY TO SECOND
```

A numeric value can be cast to an interval type. In this case the numeric value is first converted to a single-field INTERVAL type with the same field as the least significant field of the target interval type. This value is then converted to the target interval type For example CAST(22 AS INTERVAL YEAR TO MONTH) evaluates to INTERVAL '22'

MONTH and then INTERVAL '1 10' YEAR TO MONTH. Note that SQL Standard only supports casts to single-field INTERVAL types, while HyperSQL allows casting to multi-field types as well.

An interval value can be cast to a numeric type. In this case the interval value is first converted to a single-field INTERVAL type with the same field as the least significant field of the interval value. The value is then converted to the target type. For example CAST (INTERVAL '1-11' YEAR TO MONTH AS INT) evaluates to INTERVAL '23' MONTH, and then 23.

An interval value can be cast into a character type, which results in an INTERVAL literal. A character value can be cast into an INTERVAL type so long as it is a string with a format compatible with an INTERVAL literal.

Two interval values can be added or subtracted so long as the types of both are based on the same field, i.e., both are based on MONTH or SECOND. The values are both converted to a single-field interval type with same field as the least-significant field between the two types. After addition or subtraction, the result is converted to an interval type that contains all the fields of the two original types.

An interval value can be multiplied or divided by a numeric value. Again, the value is converted to a numeric, which is then multiplied or divided, before converting back to the original interval type.

An interval value is negated by simply prefixing with the minus sign.

Interval values used in expressions are either typed values, including interval literals, or are interval casts. The expression: <expression> <interval qualifier> is a cast of the result of the <expression> into the INTERVAL type specified by the <interval qualifier>. The cast can be formed by adding the keywords and parentheses as follows: CAST (<expression> AS INTERVAL <interval qualifier>).

The examples below feature different forms of expression that represent an interval value, which is then added to the given date literal.

```
DATE '2000-01-01' + INTERVAL '1-10' YEAR TO MONTH /* interval literal */
DATE '2000-01-01' + '1-10' YEAR TO MONTH /* the string '1-10' is cast into INTERVAL YEAR TO
MONTH */
DATE '2000-01-01' + 22 MONTH /* the integer 22 is cast into INTERVAL MONTH, same value as above
*/
DATE '2000-01-01' - 22 DAY /* the integer 22 is cast into INTERVAL DAY */
DATE '2000-01-01' + COL2 /* the type of COL2 must be an INTERVAL type */
DATE '2000-01-01' + COL2 MONTH /* COL2 may be a number, it is cast into a MONTH interval */
```

Datetime and Interval Operations

An interval can be added to or subtracted from a datetime value so long as they have some fields in common. For example, an INTERVAL MONTH cannot be added to a TIME value, while an INTERVAL HOUR TO SECOND can. The interval is first converted to a numeric value, then the value is added to, or subtracted from, the corresponding field of the datetime value.

If the result of addition or subtraction is beyond the permissible range for the field, the field value is normalised and carried over to the next significant field until all the fields are normalised. For example, adding 20 minutes to TIME '23:50:10' will result successively in '23:70:10', '24:10:10' and finally TIME '00:10:10'. Subtracting 20 minutes from the result is performed as follows: '00:-10:10', '-1:50:10', finally TIME '23:50:10'. Note that if DATE or TIMESTAMP normalisation results in the YEAR field value out of the range (1,1000), then an exception condition is raised.

If an interval value based on MONTH is added to, or subtracted from a DATE or TIMESTAMP value, the result may have an invalid day (30 or 31) for the given result month. In this case an exception condition is raised.

The result of subtraction of two datetime expressions is an interval value. The two datetime expressions must be of the same type. The type of the interval value must be specified in the expression, using only the interval field names.

The two datetime expressions are enclosed in parentheses, followed by the <interval qualifier> fields. In the first example below, COL1 and COL2 are of the same datetime type, and the result is evaluated in INTERVAL YEAR TO MONTH type.

```
(COL1 - COL2) YEAR TO MONTH /* the difference between two DATE or two TIMESTAMP values in years
and months */
(CURRENT_DATE - COL3) DAY /* the number of days between the value of COL3 and the current date
*/
(CURRENT_DATE - DATE '2000-01-01') YEAR TO MONTH /* the number of years and months since the
beginning of this century */
CURRENT_DATE - 2 DAY /* the date of the day before yesterday */
(CURRENT_TIMESTAMP - TIMESTAMP '2009-01-01 00:00:00') DAY(4) TO SECOND(2) /* days to seconds
since the given date */
```

The individual fields of both datetime and interval values can be extracted using the EXTRACT function. The same function can also be used to extract the time zone displacement fields of a datetime value.

```
EXTRACT ({YEAR | MONTH | DAY | HOUR | MINUTE | SECOND | TIMEZONE_HOUR |
TIMEZONE_MINUTE | DAY_OF_WEEK | WEEK_OF_YEAR } FROM {<datetime value> | <interval
value>})
```

The dichotomy between interval types based on seconds, and those based on months, stems from the fact that the different calendar months have different numbers of days. For example, the expression, “nine months and nine days since an event” is not exact when the date of the event is unknown. It can represent a period of around 284 days give or take one. SQL interval values are independent of any start or end dates or times. However, when they are added to or subtracted from certain date or timestamp values, the result may be invalid and cause an exception (e.g. adding one month to January 30 results in February 30, which is invalid).

JDBC has an unfortunate limitation and does not include type codes for SQL INTERVAL types. Therefore, for compatibility with database tools that are limited to the JDBC type codes, HyperSQL reports these types by default as VARCHAR. You can use the URL property `hsqldb.translate_dti_types=false` to override the default behaviour.

Arrays

Array are a powerful feature of SQL:2008 and can help solve many common problems. Arrays should not be used as a substitute for tables.

HyperSQL supports arrays of values according to the SQL:2008 Standard.

Elements of the array are either NULL, or of the same data type. It is possible to define arrays of all supported types, including the types covered in this chapter and user defined types, except LOB types. An SQL array is one dimensional and is addressed from position 1. An empty array can also be used, which has no element.

Arrays can be stored in the database, as well as being used as temporary containers of values for simplifying SQL statements. They facilitate data exchange between the SQL engine and the user's application.

The full range of supported syntax allows array to be created, used in SELECT or other statements, combined with rows of tables and used in routine calls.

Array Definition

The type of a table column, a routine parameter, a variable, or the return value of a function can be defined as an array.

```
<array type> ::= <data type> ARRAY [ <left bracket or trigraph> <maximum
cardinality> <right bracket or trigraph> ]
```

The word ARRAY is added to any valid type definition except BLOB and CLOB type definitions. If the optional <maximum cardinality> is not used, the default value is 1024. The size of the array cannot be extended beyond maximum cardinality.

In the example below, the table contains a column of integer arrays and a column of varchar arrays. The VARCHAR array has an explicit maximum size of 10, which means each array can have between 0 and 10 elements. The INTEGER array has the default maximum size of 1024. The scores column has a default clause with an empty array. The default clause can be defined only as DEFAULT NULL or DEFAULT ARRAY[] and does not allow arrays containing elements.

```
CREATE TABLE t (id INT PRIMARY KEY, scores INT ARRAY DEFAULT ARRAY[], names VARCHAR(20)
ARRAY[10])
```

An array can be constructed from value expressions or a query expression.

```
<array value constructor by enumeration> ::= ARRAY <left bracket or trigraph>
<array element list> <right bracket or trigraph>
```

```
<array element list> ::= <value expression> [ { <comma> <value expression> }... ]
```

```
<array value constructor by query> ::= ARRAY <left paren> <query expression>
[ <order by clause> ] <right paren>
```

In the examples below, arrays are constructed from values, column references or variables, function calls, or query expressions.

```
ARRAY [ 1, 2, 3 ]
ARRAY [ 'HOT', 'COLD' ]
ARRAY [ var1, var2, CURRENT_DATE ]
ARRAY (SELECT lastname FROM namestable ORDER BY id)
```

Inserting and updating a table with an ARRAY column can use array constructors, not only for updated column values, but also in equality search conditions:

```
INSERT INTO t VALUES 10, ARRAY[1,2,3], ARRAY['HOT', 'COLD']
UPDATE t SET names = ARRAY['LARGE', 'SMALL'] WHERE id = 12
UPDATE t SET names = ARRAY['LARGE', 'SMALL'] WHERE id < 12 AND scores = ARRAY[3,4]
```

When using a PreparedStatement with an ARRAY parameter, an object of the type java.sql.Array must be used to set the parameter. The org.hsqldb.jdbc.JDBCArrayBasic class can be used for constructing a java.sql.Array object in the user's application. Code fragment below:

```
String sql = "UPDATE t SET names = ? WHERE id = ?";
PreparedStatement ps = connection.prepareStatement(sql)
Object[] data = new Object[]{"one", "two"};
// default types defined in org.hsqldb.types.Type can be used
org.hsqldb.types.Type type = org.hsqldb.types.Type.SQL_VARCHAR_DEFAULT;
JDBCArrayBasic array = new JDBCArrayBasic(data, type);
ps.setArray(1, array);
ps.setInt(2, 1000);
ps.executeUpdate();
```

Trigraph

A trigraph is a substitute for <left bracket> and <right bracket>.

```
<left bracket trigraph> ::= ??(
```

```
<right bracket trigraph> ::= ??)
```

The example below shows the use of trigraphs instead of brackets.

```
INSERT INTO t VALUES 10, ARRAY??(1,2,3??), ARRAY['HOT', 'COLD']
UPDATE t SET names = ARRAY ??('LARGE', 'SMALL'??) WHERE id = 12
UPDATE t SET names = ARRAY['LARGE', 'SMALL'] WHERE id < 12 AND scores = ARRAY[3,4]
```

Array Reference

The most common operations on an array are element reference and assignment, which are used when reading or writing an element of the array. Unlike Java and many other languages, arrays are extended if an element is assigned to an index beyond the current length. This can result in gaps containing NULL elements. Array length cannot exceed the maximum cardinality.

Elements of all arrays, including those that are the result of function calls or other operations can be referenced for reading.

```
<array element reference> ::= <array value expression> <left bracket> <numeric value expression> <right bracket>
```

Elements of arrays that are table columns or routine variables can be referenced for writing. This is done in a SET statement, either inside an UPDATE statement, or as a separate statement in the case of routine variables, OUT and INOUT parameters.

```
<target array element specification> ::= <target array reference> <left bracket or trigraph> <simple value specification> <right bracket or trigraph>
```

```
<target array reference> ::= <SQL parameter reference> | <column reference>
```

Note that only simple values or variables are allowed for the array index when an assignment is performed. The examples below demonstrates how elements of the array are referenced in SELECT and an UPDATE statement.

```
SELECT scores[ranking], names[ranking] FROM t JOIN t1 on (t.id = t1.tid)
UPDATE t SET scores[2] = 123, names[2] = 'Reds' WHERE id = 10
```

```
SELECT scores[ranking], names[ranking] FROM t JOIN t1 on (t.id = t1.tid)
UPDATE t SET scores[2] = 123, names[2] = 'Reds' WHERE id = 10
```

Array Operations

Several SQL operations and functions can be used with arrays.

CONCATENATION

Array concatenation is performed similar to string concatenation. All elements of the array on the right are appended to the array on left.

```
<array concatenation> ::= <array value expression 1> <concatenation operator>
<array value expression 2>
```

```
<concatenation operator> ::= ||
```

FUNCTIONS

Seven functions operate on arrays. Details are described in the [Built In Functions](#) chapter.

ARRAY_AGG is an aggregate function and produces an array containing values from different rows of a SELECT statement. Details are described in the [Data Access and Change](#) chapter.

SEQUENCE_ARRAY creates an array with sequential elements.

```
CARDINALITY <left paren> <array value expression> <right paren>
```

```
MAX_CARDINALITY <left paren> <array value expression> <right paren>
```

Array cardinality and max cardinality are functions that return an integer. CARDINALITY returns the element count, while MAX_CARDINALITY returns the maximum declared cardinality of an array.

```
POSITION_ARRAY <left paren> <value expression> IN <array value expression> [FROM
<numeric value expression>] <right paren>
```

The POSITION_ARRAY function returns the position of the first match for the <value expression> from the start or from the given start position when <numeric value expression> is used.

```
TRIM_ARRAY <left paren> <array value expression> <comma> <numeric value
expression> <right paren>
```

The TRIM_ARRAY function returns a copy of an array with the specified number of elements removed from the end of the array. The <array value expression> can be any expression that evaluates to an array.

```
SORT_ARRAY <left paren> <array value expression> [ { ASC | DESC } ] [ NULLS
{ FIRST | LAST } ] <right paren>
```

The SORT_ARRAY function returns a sorted copy of an array. NULL elements appear at the beginning of the new array. You can change the sort direction or the position of NULL elements with the option keywords.

CAST

An array can be cast into an array of a different type. Each element of the array is cast into the element type of the target array type.

UNNEST

Arrays can be converted into table references with the UNNEST keyword.

```
UNNEST(<array value expression>) [ WITH ORDINALITY ]
```

The <array value expression> can be any expression that evaluates to an array. A table is returned that contains one column when WITH ORDINALITY is not used, or two columns when WITH ORDINALITY is used. The first column contains the elements of the array (including all the nulls). When the table has two columns, the second column contains the ordinal position of the element in the array. When UNNEST is used in the FROM clause of a query, it implies the LATERAL keyword, which means the array that is converted to table can belong to any table that precedes the UNNEST in the FROM clause. This is explained in the [Data Access and Change](#) chapter.

INLINE CONSTRUCTOR

Array constructors can be used in SELECT and other statements. For example, an array constructor with a subquery can return the values from several rows as one array.

The example below shows an ARRAY constructor with a correlated subquery to return the list of order values for each customer. The CUSTOMER table that is included for tests in the DatabaseManager GUI app is the source of the data.

```
SELECT FIRSTNAME, LASTNAME, ARRAY(SELECT INVOICE.TOTAL FROM INVOICE WHERE CUSTOMERID =
CUSTOMER.ID) AS ORDERS FROM CUSTOMER
```

FIRSTNAME	LASTNAME	ORDERS
Laura	Steel	ARRAY[2700.90,4235.70]
Robert	King	ARRAY[4761.60]
Robert	Sommer	ARRAY[]
Michael	Smith	ARRAY[3420.30]

COMPARISON

Arrays can be compared for equality, but they cannot be compared for ordering values or range comparison. Array expressions are therefore not allowed in an `ORDER BY` clause, or in a comparison expression such as `GREATER THAN`. It is possible to define a `UNIQUE` constraint on a column of `ARRAY` type. Two arrays are equal if they have the same length and the values at each index position are either equal or both `NULL`.

USER DEFINED FUNCTIONS and PROCEDURES

Array parameters, variables and return values can be specified in user defined functions and procedures, including aggregate functions. An aggregate function can return an array that contains all the scalar values that have been aggregated. These capabilities allow a wider range of applications to be covered by user defined functions and easier data exchange between the engine and the user's application.

Indexes and Query Speed

HyperSQL supports `PRIMARY KEY`, `UNIQUE` and `FOREIGN KEY` constraints, which can span multiple columns.

The engine creates indexes internally to support `PRIMARY KEY`, `UNIQUE` and `FOREIGN KEY` constraints: a unique index is created for each `PRIMARY KEY` or `UNIQUE` constraint; an ordinary index is created for each `FOREIGN KEY` constraint.

HyperSQL allows defining indexes on single or multiple columns. You should not create duplicate user-defined indexes on the same column sets covered by constraints. This would result in unnecessary memory and speed overheads. See the discussion in the [Deployment Guide](#) chapter for more information.

Indexes are crucial for adequate query speed. When range or equality conditions are used e.g. `SELECT ... WHERE acol > 10 AND bcol = 0`, an index should exist on one of the columns that has a condition. In this example, the `bcol` column is the best candidate. HyperSQL always uses the best condition and index. If there are two indexes, one on `acol`, and another on `bcol`, it will choose the index on `bcol`.

Queries always return results whether indexes exist or not, but they return much faster when an index exists. As a rule of thumb, `HSQldb` is capable of internal processing of queries at over 100,000 rows per second. Any query that runs into several seconds is clearly accessing thousands of rows. The query should be checked and indexes should be added to the relevant columns of the tables if necessary. The `EXPLAIN PLAN FOR <query>` statement can be used to see which indexes are used to process the query.

When executing a `DELETE` or `UPDATE` statement, the engine needs to find the rows that are to be deleted or updated. If there is an index on one of the columns in the `WHERE` clause, it is often possible to start directly from the first candidate row. Otherwise all the rows of the table have to be examined.

Indexes are even more important in joins between multiple tables. `SELECT ... FROM t1 JOIN t2 ON t1.c1 = t2.c2` is performed by taking rows of `t1` one by one and finding a matching row in `t2`. If there is no index on `t2.c2` then for each row of `t1`, all the rows of `t2` must be checked. Whereas with an index, a matching row can be found in a fraction of the time. If the query also has a condition on `t1`, e.g., `SELECT ... FROM t1 JOIN t2 ON t1.c1 = t2.c2 WHERE t1.c3 = 4` then an index on `t1.c3` would eliminate the need for checking all the rows of `t1` one by one, and will reduce query time to less than a millisecond per returned row. So if `t1` and `t2` each contain 10,000 rows, the query without indexes involves checking 100,000,000 row combinations. With an index on

t2.c2, this is reduced to 10,000 row checks and index lookups. With the additional index on t2.c2, only about 4 rows are checked to get the first result row.

Note that in HSQLDB an index on multiple columns can be used internally as a non-unique index on the first column in the list. For example: `CONSTRAINT name1 UNIQUE (c1, c2, c3);` means there is the equivalent of `CREATE INDEX name2 ON atable(c1);`. So you do not need to specify an extra index if you require one on the first column of the list.

In HyperSQL 2, a multi-column index will speed up queries that contain joins or values on the first n columns of the index. You need NOT declare additional individual indexes on those columns unless you use queries that search only on a subset of the columns. For example, rows of a table that has a PRIMARY KEY or UNIQUE constraint on three columns or simply an ordinary index on those columns can be found efficiently when values for all three columns, or the first two columns, or the first column, are specified in the WHERE clause. For example, `SELECT ... FROM t1 WHERE t1.c1 = 4 AND t1.c2 = 6 AND t1.c3 = 8` will use an index on t1(c1, c2, c3) if it exists.

A multi-column index will not speed up queries on the second or third column only. The first column must be specified in the JOIN .. ON or WHERE conditions.

Sometimes query speed depends on the order of the tables in the JOIN .. ON or FROM clauses. For example the second query below should be faster with large tables (provided there is an index on TB.COL3). The reason is that TB.COL3 can be evaluated very quickly if it applies to the first table (and there is an index on TB.COL3):

```
-- TB is a very large table with only a few rows where TB.COL3 = 4
SELECT * FROM TA JOIN TB ON TA.COL1 = TB.COL2 AND TB.COL3 = 4;
SELECT * FROM TB JOIN TA ON TA.COL1 = TB.COL2 AND TB.COL3 = 4;
```

The general rule is to put first the table that has a narrowing condition on one of its columns. In certain cases, HyperSQL 2.2.x reorders the joined tables if it is obvious that this will introduce a narrowing condition.

HyperSQL features automatic, on-the-fly indexes for views and subselects that are used in a query.

Indexes are used when a LIKE condition searches from the start of the string.

Indexes are used for ORDER BY clauses if the same index is used for selection and ordering of rows. It is possible to force the use of index for ORDER BY.

Query Processing and Optimisation

HyperSQL 2.3.x changes the order of tables in a query in order to optimise processing. This happens only when one of the tables has a narrowing condition and reordering does not change the result of the query.

Indexes and Conditions

HyperSQL optimises queries to use indexes, for all types of range and equality conditions, including IS NULL and NOT NULL conditions. Conditions can be in join or WHERE clauses, including all types of joins.

In addition, HyperSQL will use an index (if one exists) for IN conditions, whether constants, variable, or subqueries are used on the right hand side of the IN predicate. Multicolumn IN conditions can also use an index.

HyperSQL can always use indexes when several conditions are combined with the AND operator, choosing a conditions which can use an index. This now extended to all equality conditions on multiple columns that are part of an index.

HyperSQL will also use indexes when several conditions are combined with the OR operator and each condition can use an index (each condition may use a different index). For example, if a huge table has two separate columns for

first name and last name, and both columns are indexed, a query such as the following example will use the indexes and complete in a short time:

```
-- TC is a very large table

SELECT * FROM TC WHERE TC.FIRSTNAME = 'John' OR TC.LASTNAME = 'Smith' OR TC.LASTNAME =
'Williams'
```

Each subquery is considered a separate SELECT statement and uses indexes when they are available.

In each SELECT statement, at least one index per table can be used if there is a query conditions that can use the index. When conditions on a table are combined with the OR operator, and each condition can use an index, multiple indexes per table are used.

Indexes and Operations

HyperSQL optimises simple row count queries in the form of `SELECT COUNT(*) FROM <table>` and returns the result immediately (this optimisation does not take place in MVCC mode).

HyperSQL can use an index on a column for `SELECT MAX(<column>) FROM <table>` and `SELECT MIN(<column>) FROM <table>` queries. There should be an index on the <column> and the query can have a WHERE condition on the same column. In the example below the maximum value for the TB.COL3 below 1000000 is returned.

```
SELECT MAX(TB.COL3) FROM TB WHERE TB.COL < 1000000
```

HyperSQL can use an index for simple queries containing DISTINCT or GROUP BY to avoid checking all the rows of the table. Note that indexes are always used if the query has a condition, regardless of the use of DISTINCT or GROUP BY. This particular optimisation applies to cases in which all the columns in the SELECT list are from the same table and are covered by a single index, and any join or query condition uses this index.

For example, with the large table below, a DISTINCT or GROUP BY query to return all the last names, can use an the index on the TC.LASTNAME column. Similarly, a GROUP BY query on two columns can use an index that covers the two columns.

```
-- TC is a very large table

SELECT DISTINCT LASTNAME FROM TC WHERE TC.LASTNAME > 'F'
SELECT STATE, LASTNAME FROM TC GROUP BY STATE, LASTNAME
```

Indexes and ORDER BY, OFFSET and LIMIT

HyperSQL can use an index on an ORDER BY clause if all the columns in ORDER BY are in a single-column or multi-column index (in the exact order). This is important if there is a LIMIT n (or FETCH n ROWS ONLY) clause. In this situation, the use of index allows the query processor to access only the number of rows specified in the LIMIT clause, instead of building the whole result set, which can be huge. This also works for joined tables when the ORDER BY clause is on the columns of the first table in a join. Indexes are used in the same way when ORDER BY ... DESC is specified in the query. Note that unlike some other RDBMS, HyperSQL does not need or create DESC indexes. It can use any ordinary, ascending index for ORDER BY ... DESC.

If there is an equality or range condition (e.g. EQUALS, GREATER THAN) condition on the columns specified in the ORDER BY clause, the index is still used.

In the two examples below, the index on TA.COL3 is used and only up to 1000 rows are processed and returned.

```
-- TA is a very large table with an index on TA.COL3
```

```
SELECT * FROM TA JOIN TB ON TA.COL2 = TB.COL1 WHERE TA.COL3 > 40000 ORDER BY TA.COL3 LIMIT 1000;  
SELECT * FROM TA JOIN TB ON TA.COL2 = TB.COL1 WHERE TA.COL3 > 40000 AND TA.COL3 < 100000 ORDER  
BY TA.COL3 DESC LIMIT 1000;
```

But if the query contains an equality condition on another indexed column in the table, this may take precedence and no index may be used for ORDER BY. In this case USING INDEX can be added to the end of the query to force the use of the index for the LIMIT operation. In the example below there is an index on TA.COL1 as well as the index on TA.COL3. Normally the index on TA.COL1 is used, but the USING INDEX hint results in the index on TB.COL3 to be used for selecting the first 1000 rows.

```
-- TA is a very large table with an index on TA.COL3 and a separate index on TA.COL1  
  
SELECT * FROM TA JOIN TB ON TA.COL2 = TB.COL1 WHERE TA.COL1 = 'SENT' AND TB.COL3 > 40000 ORDER  
BY TB.COL3 LIMIT 1000 USING INDEX;
```

Chapter 3. Sessions and Transactions

Fred Toussi, The HSQL Development Group

\$Revision: 5630 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

All SQL statements are executed in sessions. When a connection is established to the database, a session is started. The authorization of the session is the name of the user that started the session. A session has several properties. These properties are set by default at the start according to database settings.

SQL Statements are generally transactional statements. When a transactional statement is executed, it starts a transaction if no transaction is in progress. If SQL Data (data stored in tables) is modified during a transaction, the change can be undone with a ROLLBACK statement. When a COMMIT or ROLLBACK statement is executed, the transaction is ended. Each SQL statement works atomically: it either succeeds or fails without changing any data. If a single statement fails, an error is raised but the transaction is not normally terminated. However, some failures are caused by execution of statements that are in conflict with statements executed in other concurrent sessions. Such failures result in an implicit ROLLBACK, in addition to the exception that is raised.

Schema definition and manipulation statements are also transactional according to the SQL Standard. HyperSQL 2.3 performs automatic commits before and after the execution of such transactions. Therefore, schema-related statements cannot be rolled back. This is likely to change in future versions.

Some statements are not transactional. Most of these statements are used to change the properties of the session. These statements begin with the SET keyword.

If the AUTOCOMMIT property of a session is TRUE, then each transactional statement is followed by an implicit COMMIT.

The default isolation level for a session is READ COMMITTED. This can be changed using the JDBC `java.sql.Connection` object and its `setTransactionIsolation(int level)` method. The session can be put in read-only mode using the `setReadOnly(boolean readOnly)` method. Both methods can be invoked only after a commit or a rollback, but not during a transaction.

The isolation level and / or the readonly mode of a transaction can also be modified using an SQL statement. You can use the statement to change only the isolation mode, only the read-only mode, or both at the same time. This statement can be issued only before a transaction starts or after a commit or rollback.

```
SET TRANSACTION <transaction characteristic> [ <comma> <transaction
characteristic> ]
```

This statement is described in detail later in this chapter.

Session Attributes and Variables

Each session has several system attributes. A session can also have user-defined session variables.

Session Attributes

The system attributes reflect the current mode of operation for the session. These attributes can be accessed with function calls and can be referenced in queries. For example, they can be returned using the `VALUES <attribute function>, ... statement`.

The named attributes such as `CURRENT_USER`, `CURRENT_SCHEMA`, etc. are SQL Standard functions. Other attributes of the session, such as auto-commit or read-only modes can be read using other built-in functions. All these functions are listed in the [Built In Functions](#) chapter.

Session Variables

Session variables are user-defined variables created the same way as the variables for stored procedures and functions. Currently, these variables cannot be used in general SQL statements. They can be assigned to IN, INOUT and OUT parameters of stored procedures. This allows calling stored procedures which have INOUT or OUT arguments and is useful for development and debugging. See the example in the [SQL-Invoked Routines](#) chapter, under Formal Parameters.

Example 3.1. User-defined Session Variables

```
DECLARE counter INTEGER DEFAULT 3;
DECLARE result VARCHAR(20) DEFAULT NULL;
SET counter=15;
CALL myroutine(counter, result)
```

Session Tables

With necessary access privileges, sessions can access all table, including `GLOBAL TEMPORARY` tables, that are defined in schemas. Although `GLOBAL TEMPORARY` tables have a single name and definition which applies to all sessions that use them, the contents of the tables are different for each session. The contents are cleared either at the end of each transaction or when the session is closed.

Session tables are different because their definition is visible only within the session that defines a table. The definition is dropped when the session is closed. Session tables do not belong to schemas.

```
<temporary table declaration> ::= DECLARE LOCAL TEMPORARY TABLE <table name>
<table element list> [ ON COMMIT { PRESERVE | DELETE } ROWS ]
```

The syntax for declaration is based on the SQL Standard. A session table cannot have `FOREIGN KEY` constraints, but it can have `PRIMARY KEY`, `UNIQUE` or `CHECK` constraints. A session table definition cannot be modified by adding or removing columns, indexes, etc.

It is possible to refer to a session table using its name, which takes precedence over a schema table of the same name. To distinguish a session table from schema tables, the pseudo schema names, `MODULE` or `SESSION` can be used. An example is given below:

Example 3.2. User-defined Temporary Session Tables

```
DECLARE LOCAL TEMPORARY TABLE buffer (id INTEGER PRIMARY KEY, textdata VARCHAR(100)) ON COMMIT
PRESERVE ROWS
INSERT INTO module.buffer SELECT id, firstname || ' ' || lastname FROM customers
-- do some more work
DROP TABLE module.buffer
-- or use alternative pseudo schema name
DROP TABLE session.buffer
```

Session tables can be created inside a transaction. Automatic indexes are created and used on session tables when necessary for a query or other statement. By default, session table data is held in memory. This can be changed with the `SET SESSION RESULT MEMORY ROWS` statement.

Transactions and Concurrency Control

HyperSQL 2 has been fully redesigned to support different transaction isolation models. It no longer supports the old 1.8.x model with "dirty read". Although it is perfectly possible to add an implementation of the transaction manager that supports the legacy model, we thought this is no longer necessary. The new system allows you to select the transaction isolation model while the engine is running. It also allows you to choose different isolation levels for different simultaneous sessions.

HyperSQL 2 supports three concurrency control models: two-phase-locking (2PL), which is the default, multiversion concurrency control (MVCC) and a hybrid model, which is 2PL plus multiversion rows (MVLOCKS). Within each model, it supports some of the 4 standard levels of transaction isolation: `READ UNCOMMITTED`, `READ COMMITTED`, `REPEATABLE READ` and `SERIALIZABLE`. The concurrency control model is a strategy that governs all the sessions and is set for the database, as opposed for individual sessions. The isolation level is a property of each SQL session, so different sessions can have different isolation levels. In the new implementation, all isolation levels avoid the "dirty read" phenomenon and do not read uncommitted changes made to rows by other transactions.

HyperSQL is fully multi threaded in all transaction models. Sessions continue to work simultaneously and can fully utilise multi-core processors.

The concurrency control model of a live database can be changed. The `SET DATABASE TRANSACTION CONTROL { LOCKS | MVLOCKS | MVCC }` can be used by a user with the DBA role.

Two Phase Locking

The two-phase locking model is the default mode. It is referred to by the keyword, `LOCKS`. In the 2PL model, each table that is read by a transaction is locked with a shared lock (read lock), and each table that is written to is locked with an exclusive lock (write lock). If two sessions read and modify different tables then both go through simultaneously. If one session tries to lock a table that has been locked by the other, if both locks are shared locks, it will go ahead. If either of the locks is an exclusive lock, the engine will put the session in wait until the other session commits or rolls back its transaction. The engine will throw an error if the action would result in deadlock.

HyperSQL also supports explicit locking of a group of tables for the duration of the current transaction. Use of this command blocks access to the locked tables by other sessions and ensures the current session can complete the intended reads and writes on the locked tables.

If a table is read-only, it will not be locked by any transaction.

The `READ UNCOMMITTED` isolation level can be used in 2PL modes for read-only operations. It is the same as `READ COMMITTED` plus read only.

The `READ COMMITTED` isolation level is the default. It keeps write locks on tables until commit, but releases the read locks after each operation.

The `REPEATABLE READ` level is upgraded to `SERIALIZABLE`. These levels keep both read and write locks on tables until commit.

It is possible to perform some critical operations at the `SERIALIZABLE` level, while the rest of the operations are performed at the `READ COMMITTED` level.

Note: two phase locking refers to two periods in the life of a transaction. In the first period, locks are acquired, in the second period locks are released. No new lock is acquired after releasing a lock.

Two Phase Locking with Snapshot Isolation

This model is referred to as MVLOCKS. It works the same way as normal 2PL as far as updates are concerned.

SNAPSHOT ISOLATION is a multiversion concurrency strategy which uses the snapshot of the whole database at the time of the start of the transaction. In this model, read only transactions use SNAPSHOT ISOLATION. While other sessions are busy changing the database, the read only session sees a consistent view of the database and can access all the tables even when they are locked by other sessions for updates.

There are many applications for this mode of operation. In heavily updated data sets, this mode allows uninterrupted read access to the data.

Lock Contention in 2PL

When multiple connections are used to access the database, the transaction manager controls their activities. When each transaction performs only reads or writes on a single table, there is no contention. Each transaction waits until it can obtain a lock then performs the operation and commits. Contentions occur when transactions perform reads and writes on more than one table, or perform a read, followed by a write, on the same table.

For example, when sessions are working at the SERIALIZABLE level, when multiple sessions first read from a table in order to check if a row exists, then insert a row into the same table when it doesn't exist, there will be regular contention. Transaction A reads from the table, then does Transaction B. Now if either Transaction A or B attempts to insert a row, it will have to be terminated as the other transaction holds a shared lock on the table. If instead of two operations, a single MERGE statement is used to perform the read and write, no contention occurs because both locks are obtained at the same time.

Alternatively, there is the option of obtaining the necessary locks with an explicit LOCK TABLE statement. This statement should be executed before other statements and should include the names of all the tables and the locks needed. After this statement, all the other statements in the transaction can be executed and the transaction committed. The commit will remove all the locks.

HyperSQL detects deadlocks before attempting to execute a statement. When a lock is released after the completion of the statement, the first transaction that is waiting for the lock is allowed to continue.

HyperSQL is fully multi threaded. It therefore allows different transactions to execute concurrently so long as they are not waiting to lock the same table for write.

Locks in SQL Routines and Triggers

In both LOCKS and MVLOCKS models, SQL routines (functions and procedures) and triggers obtain all the read and write locks at the beginning of the routine execution. SQL statements contained in the routine or trigger are all executed without deadlock as all the locks have already been obtained. At the end of execution of the routine or trigger, read locks are released if the session isolation level is READ COMMITTED.

MVCC

In the MVCC model, there are no shared, read locks. Exclusive locks are used on individual rows, but their use is different. Transactions can read and modify the same table simultaneously, generally without waiting for other transactions. The SQL Standard isolation levels are used by the user's application, but these isolation levels are translated to the MVCC isolation levels READ CONSISTENCY or SNAPSHOT ISOLATION.

When transactions are running at READ COMMITTED level, no conflict will normally occur. If a transaction that runs at this level wants to modify a row that has been modified by another uncommitted transaction, then the engine

puts the transaction in wait, until the other transaction has committed. The transaction then continues automatically. This isolation level is called **READ CONSISTENCY**.

Deadlock is completely avoided by the engine. The database setting, **SET DATABASE TRANSACTION ROLLBACK ON CONFLICT**, determines what happens in case of deadlock. In theory, conflict (deadlock) is possible if each transaction is waiting for a different row modified by the other transaction. In this case, one of the transactions is immediately terminated by rolling back all the previous statements in the transaction in order to allow the other transaction to continue. If the setting has been changed to **FALSE** with the `<set database transaction rollback on conflict statement>`, the session that avoided executing the deadlock-causing statement returns an error, but without rolling back the previous statements in the current transaction. This session should perform an alternative statement to continue and commit or roll back the transaction. Once the session has committed or rolled back, the other session can continue. This allows maximum flexibility and compatibility with other database engines which do not roll back the transaction upon deadlock.

When transactions are running in **REPEATABLE READ** or **SERIALIZABLE** isolation levels, conflict is more likely to happen. There is no difference in operation between these two isolation levels. This isolation level is called **SNAPSHOT ISOLATION**.

In this mode, when the duration of two transactions overlaps, if one of the transactions has modified a row and the second transaction wants to modify the same row, the action of the second transaction will fail. This happens even if the first transaction has already committed. The engine will invalidate the second transaction and roll back all its changes. If the setting is changed to **false** with the `<set database transaction rollback on conflict statement>`, then the second transaction will just return an error without rolling back. The application must perform an alternative statement to continue or roll back the transaction.

In the MVCC model, **READ UNCOMMITTED** is promoted to **READ COMMITTED**, as the new architecture is based on multi-version rows for uncommitted data and more than one version may exist for some rows.

With MVCC, when a transaction only reads data, then it will go ahead and complete regardless of what other transactions may do. This does not depend on the transaction being read-only or the isolation modes.

Choosing the Transaction Model

The SQL Standard defines the isolation levels as modes of operation that avoid the three unwanted phenomena, "dirty read", "fuzzy read" and "phantom row" during a transaction. The "dirty read" phenomenon occurs when a session can read changes to a row made by another uncommitted session. The "fuzzy read" phenomenon occurs when a session reads a row and the row is modified by another session which commits, then the first session reads the row again. The "phantom row" phenomenon occurs when a session performs an operation that affects several rows, for example, counts the rows or modifies them using a search condition, then another session adds one or more rows that fulfil the same search condition and commits, then the first session performs an operation that relies on the results of its last operation. According to the Standard, the **SERIALIZABLE** isolation level avoids all three phenomena and also ensures that all the changes performed during a transaction can be considered as a series of uninterrupted changes to the database without any other transaction changing the database at all for the duration of these actions. The changes made by other transactions are considered to occur before the **SERIALIZABLE** transaction starts, or after it ends. The **READ COMMITTED** level avoids "dirty read" only, while the **REPEATABLE READ** level avoids "dirty read" and "fuzzy read", but not "phantom row".

The Standard allows the engine to return a higher isolation level than requested by the application. HyperSQL promotes a **READ UNCOMMITTED** request to **READ COMMITTED** and promotes a **REPEATABLE READ** request to **SERIALIZABLE**.

The MVCC model is not covered directly by the Standard. Research has established that the **READ CONSISTENCY** level fulfils the requirements of (and is stronger than) the **READ COMMITTED** level. The **SNAPSHOT ISOLATION** level is stronger than the **READ CONSISTENCY** level. It avoids the three anomalies defined by the Standard, and is therefore stronger than the **REPEATABLE READ** level as defined by the Standard. When operating with the

MVCC model, HyperSQL treats a REPEATABLE READ or SERIALIZABLE setting for a transaction as SNAPSHOT ISOLATION.

All modes can be used with as many simultaneous connections as required. The default 2PL model is fine for applications with a single connection, or applications that do not access the same tables heavily for writes. With multiple simultaneous connections, MVCC can be used for most applications. Both READ CONSISTENCY and SNAPSHOT ISOLATION levels are stronger than the corresponding READ COMMITTED level in the 2PL mode. Some applications require SERIALIZABLE transactions for at least some of their operations. For these applications, one of the 2PL modes can be used. It is possible to switch the concurrency model while the database is operational. Therefore, the model can be changed for the duration of some special operations, such as synchronization with another data source or performing bulk changes to table contents.

All concurrency models are very fast in operation. When data change operations are mainly on the same tables, the MVCC model may be faster, especially with multi-core processors.

Schema and Database Change

There are a few SQL statements that must access a consistent state of the database during their executions. These statements, which include CHECKPOINT and BACKUP, put an exclusive lock on all the tables of the database when they start.

Some schema manipulation statements put an exclusive lock on one or more tables. For example changing the columns of a table locks the table exclusively.

In the MVCC model, all statements that need an exclusive lock on one or more tables, put an exclusive lock on the database catalog until they complete.

The effect of these exclusive locks is similar to the execution of data manipulation statements with write locks. The session that is about to execute the schema change statement waits until no other session is holding a lock on any of the objects. At this point it starts its operation and locks the objects to prevent any other session from accessing the locked objects. As soon as the operation is complete, the locks are all removed.

Simultaneous Access to Tables

It was mentioned that there is no limit on the number of sessions that can access the tables and all sessions work simultaneously in multi threaded execution. However there are internal resources that are shared. Simultaneous access to these resources can reduce the overall efficiency of the system. MEMORY and TEXT tables do not share resources and do not block multi threaded access. With CACHED tables, each row change operation blocks the file and its cache momentarily until the operation is finished. This is done separately for each row, therefore a multi-row INSERT, UPDATE, or DELETE statement will allow other sessions to access the file during its execution. With CACHED tables, SELECT operations do not block each other, but selecting from different tables and different parts of a large table causes the row cache to be updated frequently and will reduce overall performance.

The new access pattern is the opposite of the access pattern of version 1.8.x. In the old version, even when 20 sessions are actively reading and writing, only a single session at a time performs an SQL statement completely, before the next session is allowed access. In the new version, while a session is performing a SELECT statement and reading rows of a CACHED table to build a result set, another session may perform an UPDATE statement that reads and writes rows of the same table. The two operations are performed without any conflict, but the row cache is updated more frequently than when one operation is performed after the other operation has finished.

Viewing Sessions

As HyperSQL is multithreaded, you can view the current sessions and their state from any admin session. The INFORMATION_SCHEMA.SYSTEM_SESSIONS table contains the list of open sessions, their unique ids and the

statement currently executed or waiting to be executed by each session. For each session, it displays the list of sessions that are waiting for it to commit, or the session that this session is waiting for.

Session and Transaction Control Statements

ALTER SESSION

alter session statement

```
<alter session statement> ::= ALTER SESSION <numeric literal> { CLOSE | RELEASE  
| END STATEMENT }
```

The `<alter session statement>` is used by an administrator to close another session or to rollback the transaction in another session. This statement is different from the other statements discussed in this chapter as it is not used for changing the settings of the current session. When `END STATEMENT` is used, the current statement that is waiting to run or being executed is aborted. When `RELEASE` is used, the current transaction is terminated with a rollback. The session remains open. `CLOSE` should be used after `RELEASE` has completed.

The session ID is used as a `<numeric literal>` in this statement. The administrator can use the `INFORMATION_SCHEMA.SYSTEM_SESSIONS` table to find the session IDs of other sessions.

```
<alter current session statement> ::= ALTER SESSION RESET { ALL | RESULT SETS  
| TABLE DATA }
```

The `<alter current session statement>` is used to clear and reset different states of the current session. When `ALL` is specified, the current transaction is rolled back, the session settings such as time zone, current schema etc. are restored to their original state at the time the session was opened and all open result sets are closed and temporary tables cleared. When `RESULT SETS` is specified, all currently open result sets are closed and the resources are released. When `TABLE DATA` is specified, the data in all temporary tables is cleared.

SET AUTOCOMMIT

set autocommit command

```
<set autocommit statement> ::= SET AUTOCOMMIT { TRUE | FALSE }
```

When an SQL session is started by creating a JDBC connection, it is in `AUTOCOMMIT` mode. In this mode, after each SQL statement a `COMMIT` is performed automatically. This statement changes the mode. It is equivalent to using the `setAutoCommit(boolean autoCommit)` method of the `JDBC Connection` object.

START TRANSACTION

start transaction statement

```
<start transaction statement> ::= START TRANSACTION [ <transaction  
characteristics> ]
```

Start an SQL transaction and set its characteristics. All transactional SQL statements start a transaction automatically, therefore using this statement is not necessary. If the statement is called in the middle of a transaction, an exception is thrown.

SET TRANSACTION

set next transaction characteristics

```
<set transaction statement> ::= SET [ LOCAL ] TRANSACTION <transaction  
characteristics>
```

Set the characteristics of the next transaction in the current session. This statement has an effect only on the next transactions and has no effect on the future transactions after the next.

transaction characteristics

transaction characteristics

```
<transaction characteristics> ::= [ <transaction mode> [ { <comma> <transaction mode> }... ] ]
```

```
<transaction mode> ::= <isolation level> | <transaction access mode> | <diagnostics size>
```

```
<transaction access mode> ::= READ ONLY | READ WRITE
```

```
<isolation level> ::= ISOLATION LEVEL <level of isolation>
```

```
<level of isolation> ::= READ UNCOMMITTED | READ COMMITTED | REPEATABLE READ | SERIALIZABLE
```

```
<diagnostics size> ::= DIAGNOSTICS SIZE <number of conditions>
```

```
<number of conditions> ::= <simple value specification>
```

Specify transaction characteristics.

Example 3.3. Setting Transaction Characteristics

```
SET TRANSACTION READ ONLY
SET TRANSACTION ISOLATION LEVEL SERIALIZABLE
SET TRANSACTION READ WRITE, ISOLATION LEVEL READ COMMITTED
```

SET CONSTRAINTS

set constraints mode statement

```
<set constraints mode statement> ::= SET CONSTRAINTS <constraint name list> { DEFERRED | IMMEDIATE }
```

```
<constraint name list> ::= ALL | <constraint name> [ { <comma> <constraint name> }... ]
```

If the statement is issued during a transaction, it applies to the rest of the current transaction. If the statement is issued when a transaction is not active then it applies only to the next transaction in the current session. HyperSQL does not yet support this feature.

LOCK TABLE

lock table statement

```
<lock table statement> ::= LOCK TABLE <table name> { READ | WRITE } [, <table name> { READ | WRITE } ...]
```

In some circumstances, where multiple simultaneous transactions are in progress, it may be necessary to ensure a transaction consisting of several statements is completed, without being terminated due to possible deadlock. When this statement is executed, it waits until it can obtain all the listed locks, then returns. If obtaining the locks would result in a deadlock an error is raised. The SQL statements following this statements use the locks already obtained

(and obtain new locks if necessary) and can proceed without waiting. All the locks are released when a COMMIT or ROLLBACK statement is issued.

When the isolation level of a session is READ COMMITTED, read locks are released immediately after the execution of the statement, therefore you should use only WRITE locks in this mode. Alternatively, you can switch to the SERIALIZABLE isolation mode before locking the tables for the specific transaction that needs to finish consistently and without a deadlock. It is best to execute this statement at the beginning of the transaction with the complete list of required read and write locks.

Currently, this command does not have any effect when the database transaction control model is MVCC.

Example 3.4. Locking Tables

```
LOCK TABLE table_a WRITE, table_b READ
```

SAVEPOINT

savepoint statement

```
<savepoint statement> ::= SAVEPOINT <savepoint specifier>
```

```
<savepoint specifier> ::= <savepoint name>
```

Establish a savepoint. This command is used during an SQL transaction. It establishes a milestone for the current transaction. The SAVEPOINT can be used at a later point in the transaction to rollback the transaction to the milestone.

RELEASE SAVEPOINT

release savepoint statement

```
<release savepoint statement> ::= RELEASE SAVEPOINT <savepoint specifier>
```

Destroy a savepoint. This command is rarely used as it is not very useful. It removes a SAVEPOINT that has already been defined.

COMMIT

commit statement

```
<commit statement> ::= COMMIT [ WORK ] [ AND [ NO ] CHAIN ]
```

Terminate the current SQL-transaction with commit. This make all the changes to the database permanent.

ROLLBACK

rollback statement

```
<rollback statement> ::= ROLLBACK [ WORK ] [ AND [ NO ] CHAIN ]
```

Rollback the current SQL transaction and terminate it. The statement rolls back all the actions performed during the transaction. If NO CHAIN is specified, a new SQL transaction is started just after the rollback. The new transaction inherits the properties of the old transaction.

ROLLBACK TO SAVEPOINT

rollback statement

```
<rollback statement> ::= ROLLBACK [ WORK ] TO SAVEPOINT <savepoint specifier>
```

Rollback part of the current SQL transaction and continue the transaction. The statement rolls back all the actions performed after the specified SAVEPOINT was created. The same effect can be achieved with the rollback(Savepoint savepoint) method of the JDBC Connection object.

Example 3.5. Rollback

```
-- perform some inserts, deletes, etc.
SAVEPOINT A
-- perform some inserts, deletes, selects etc.
ROLLBACK WORK TO SAVEPOINT A
-- all the work after the declaration of SAVEPOINT A is rolled back
```

DISCONNECT

disconnect statement

```
<disconnect statement> ::= DISCONNECT
```

Terminate the current SQL session. Closing a JDBC connection has the same effect as this command.

SET SESSION CHARACTERISTICS

set session characteristics statement

```
<set session characteristics statement> ::= SET SESSION CHARACTERISTICS AS
<session characteristic list>
```

```
<session characteristic list> ::= <session characteristic> [ { <comma> <session
characteristic> }... ]
```

```
<session characteristic> ::= <session transaction characteristics>
```

```
<session transaction characteristics> ::= TRANSACTION <transaction mode>
[ { <comma> <transaction mode> }... ]
```

Set one or more characteristics for the current SQL-session. This command is used to set the transaction mode for the session. This endures for all transactions until the session is closed or the next use of this command. The current read-only mode can be accessed with the ISREADONLY() function.

Example 3.6. Setting Session Characteristics

```
SET SESSION CHARACTERISTICS AS TRANSACTION READ ONLY
SET SESSION CHARACTERISTICS AS TRANSACTION ISOLATION LEVEL SERIALIZABLE
SET SESSION CHARACTERISTICS AS TRANSACTION READ WRITE, ISOLATION LEVEL READ COMMITTED
```

SET SESSION AUTHORIZATION

set session user identifier statement

```
<set session user identifier statement> ::= SET SESSION AUTHORIZATION <value
specification>
```

Set the SQL-session user identifier. This statement changes the current user. The user that executes this command must have the CHANGE_AUTHORIZATION role, or the DBA role. After this statement is executed, all SQL statements

are executed with the privileges of the new user. The current authorisation can be accessed with the `CURRENT_USER` and `SESSION_USER` functions.

Example 3.7. Setting Session Authorization

```
SET SESSION AUTHORIZATION 'FELIX'
SET SESSION AUTHORIZATION SESSION_USER
```

SET ROLE

set role statement

```
<set role statement> ::= SET ROLE <role specification>
```

```
<role specification> ::= <value specification> | NONE
```

Set the SQL-session role name and the current role name for the current SQL-session context. The user that executes this command must have the specified role. If `NONE` is specified, then the previous `CURRENT_ROLE` is eliminated. The effect of this lasts for the lifetime of the session. The current role can be accessed with the `CURRENT_ROLE` function.

SET TIME ZONE

set local time zone statement

```
<set local time zone statement> ::= SET TIME ZONE <set time zone value>
```

```
<set time zone value> ::= <interval value expression> | LOCAL
```

Set the current default time zone displacement for the current SQL-session. When the session starts, the time zone displacement is set to the time zone of the client. This command changes the time zone displacement. The effect of this lasts for the lifetime of the session. If `LOCAL` is specified, the time zone displacement reverts to the local time zone of the session.

Example 3.8. Setting Session Time Zone

```
SET TIME ZONE LOCAL
SET TIME ZONE INTERVAL '+6:00' HOUR TO MINUTE
```

SET CATALOG

set catalog statement

```
<set catalog statement> ::= SET <catalog name characteristic>
```

```
<catalog name characteristic> ::= CATALOG <value specification>
```

Set the default schema name for unqualified names used in SQL statements that are prepared or executed directly in the current sessions. As there is only one catalog in the database, only the name of this catalog can be used. The current catalog can be accessed with the `CURRENT_CATALOG` function.

SET SCHEMA

set schema statement

```
<set schema statement> ::= SET <schema name characteristic>
```

```
<schema name characteristic> ::= SCHEMA <value specification> | <schema name>
```

Set the default schema name for unqualified names used in SQL statements that are prepared or executed directly in the current sessions. The effect of this lasts for the lifetime of the session. The SQL Standard form requires the schema name as a single-quoted string. HyperSQL also allows the use of the identifier for the schema. The current schema can be accessed with the `CURRENT_SCHEMA` function.

SET PATH

set path statement

```
<set path statement> ::= SET <SQL-path characteristic>
```

```
<SQL-path characteristic> ::= PATH <value specification>
```

Set the SQL-path used to determine the subject routine of routine invocations with unqualified routine names used in SQL statements that are prepared or executed directly in the current sessions. The effect of this lasts for the lifetime of the session.

SET MAXROWS

set max rows statement

```
<set max rows statement> ::= SET MAXROWS <unsigned integer literal>
```

The normal operation of the session has no limit on the number of rows returned from a `SELECT` statement. This command set the maximum number of rows of the result returned by executing queries.

This statement has a similar effect to the `setMaxRows(int max)` method of the JDBC Statement interface, but it affects the results returned from the next statement execution only. After the execution of the next statement, the `MAXROWS` limit is removed.

Only zero or positive values can be used with this command. The value overrides any value specified with `setMaxRows(int max)` method of a JDBC statement. The statement `SET MAXROWS 0` means no limit.

It is possible to limit the number of rows returned from `SELECT` statements with the `FETCH <n> ROWS ONLY`, or its alternative, `LIMIT <n>`. Therefore this command is not recommended for general use. The only legitimate use of this command is for checking and testing queries that may return very large numbers of rows.

SET SESSION RESULT MEMORY ROWS

set session result memory rows statement

```
<set session result memory rows statement> ::= SET SESSION RESULT MEMORY ROWS
<unsigned integer literal>
```

By default the session uses memory to build result sets, subquery results and temporary tables. This command sets the maximum number of rows of the result (and temporary tables) that should be kept in memory. If the row count of the result or temporary table exceeds the setting, the result is stored on disk. The default is 0, meaning all result sets are held in memory.

This statement applies to the current session only. The general database setting is:

```
SET DATABASE DEFAULT RESULT MEMORY ROWS <unsigned integer literal>
```

SET IGNORECASE

set ignore case statement

```
<set ignore case statement> ::= SET IGNORECASE { TRUE | FALSE }
```

This is a legacy method for creating case-insensitive columns. Still supported but not recommended for use.

Sets the type used for new `VARCHAR` table columns. By default, character columns in new databases are case-sensitive. If `SET IGNORECASE TRUE` is used, all `VARCHAR` columns in new tables are set to use a collation that converts strings to uppercase for comparison. In the latest versions of HyperSQL you can specify the collations for the database and for each column and have some columns case-sensitive and some not, even in the same table. The collation's strength is used to force case-insensitive comparison. Collations are discussed in the `Schemas and Database Objects` chapter.

This statement must be switched before creating tables. Existing tables and their data are not affected.

Chapter 4. Schemas and Database Objects

Fred Toussi, The HSQL Development Group

\$Revision: 5576 \$

Copyright 2009-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

The persistent elements of an SQL environment are database objects. The database consists of catalogs plus authorizations.

A catalog contains schemas, and schemas contain the objects that contain data or govern the data.

Each catalog contains a special schema called INFORMATION_SCHEMA. This schema is read-only and contains some views and other schema objects. The views contain lists of all the database objects that exist within the catalog, plus all authorizations.

Each database object has a name. A name is an identifier and is unique within its name-space.

Schemas and Schema Objects

In HyperSQL, there is only one catalog per database. The name of the catalog is PUBLIC. You can rename the catalog with the ALTER CATALOG RENAME TO statement. All schemas belong to this catalog. The catalog name has no relation to the file name of the database.

Each database has also an internal "unique" name which is automatically generated when the database is created. This name is used for event logging. You can also change this unique name.

Schema objects are database objects that contain data or govern or perform operations on data. By definition, each schema object belongs to a specific schema.

Schema objects can be divided into groups according to their characteristics.

- Some kinds of schema objects can exist independently from other schema objects. Other kinds can exist only as an element of another schema object. These dependent objects are automatically destroyed when the parent object is dropped.
- Separate name-spaces exist for different kinds of schema objects. Some name-spaces are shared between two similar kinds of schema objects.
- There can be dependencies between various schema objects, as a schema object can include references to other schema objects. These references can cross schema boundaries. Interdependence and cross referencing between schema objects is allowed in some circumstances and disallowed in some others.
- Schema objects can be destroyed with the DROP statement. If dependent schema objects exist, a DROP statement will succeed only if it has a CASCADE clause. In this case, dependent objects are also destroyed in most cases. In some cases, such as dropping DOMAIN objects, the dependent objects are not destroyed, but modified to remove the dependency.

A new HyperSQL catalog contains an empty schema called PUBLIC. By default, this schema is the initial schema when a new session is started. New schemas and schema objects can be defined and used in the PUBLIC schema, as well as any new schema that is created by the user. You can rename the PUBLIC schema.

HyperSQL allows all schemas to be dropped, except the schema that is the default initial schema for new sessions (by default, the PUBLIC schema). For this schema, a DROP SCHEMA ... CASCADE statement will succeed but will result in an empty schema, rather than no schema.

The statements for setting the initial schema for users are described in the [Statements for Authorization and Access Control](#) chapter.

Names and References

The name of a schema object is an `<identifier>`. The name belongs to the name-space for the particular kind of schema object. The name is unique within its name-space. For example, each schema has a separate name-space for TRIGGER objects.

In addition to the name-spaces in the schema. Each table has a name-space for the names of its columns.

Because a schema object is always in a schema and a schema always in a catalog, it is possible, and sometimes necessary, to qualify the name of the schema object that is being referenced in an SQL statement. This is done by forming an `<identifier chain>`. In some contexts, only a simple `<identifier>` can be used and the `<identifier chain>` is prohibited. While in some other contexts, the use of `<identifier chain>` is optional. An identifier chain is formed by qualifying each object with the name of the object that owns its name-space. Therefore a column name is prefixed with a table name, a table name is prefixed with a schema name, and a schema name is prefixed with a catalog name. A fully qualified column name is in the form `<catalog name>.<schema name>.<table name>.<column name>`, likewise, a fully qualified sequence name is in the form `<catalog name>.<schema name>.<sequence name>`.

HyperSQL extends the SQL standard to allow renaming all database objects. The ALTER ... RENAME TO command has slightly different forms depending on the type of object. If an object is referenced in a VIEW or ROUTINE definition, it is not always possible to rename it.

Character Sets

A CHARACTER SET is the whole or a subset of the UNICODE character set.

A character set name can only be a `<regular identifier>`. There is a separate name-space for character sets.

There are several predefined character sets. These character sets belong to INFORMATION_SCHEMA. However, when they are referenced in a statement, no schema prefix is necessary.

The following character sets, together with some others, have been specified by the SQL Standard:

SQL_TEXT, SQL_IDENTIFIER, SQL_CHARACTER

The SQL_CHARACTER consists of ASCII letters, digits and the symbols used in the SQL language. SQL_TEXT and SQL_IDENTIFIER are implementation defined. HyperSQL defines SQL_TEXT as the UNICODE character set and SQL_IDENTIFIER as the UNICODE character set minus the SQL language special characters.

SQL_TEXT consists of the full set of Unicode characters. These characters can be used in strings and clobs stored in the database. The character repertoire of HyperSQL is the UTF16 character set, which covers all possible character sets.

If a predefined character set is specified for a table column, then any string stored in the column must contain only characters from the specified character set. HyperSQL does not enforce the CHARACTER SET that is specified for a column and may accept any character string supported by SQL_TEXT.

Collations

A **COLLATION** is the method used for ordering character strings in ordered sets and to determine equivalence of two character strings.

The system collation is called **SQL_TEXT**. This collation sorts according to the Unicode code of the characters, **UNICODE_SIMPLE**. The system collation is always used for **INFORMATION_SCHEMA** tables.

The default database collation is the same as the system collation. You can change this default, either with a language collation, or with the **SQL_TEXT_UCC**. This collation is a case-insensitive form of the **UNICODE_SIMPLE** collation.

Collations for a large number of languages are supported by HyperSQL. These collations belong to **INFORMATION_SCHEMA**. However, when they are referenced in a statement, there is no need for a schema prefix.

A different collation than the default collation can be specified for each table column that is defined as **CHAR** or **VARCHAR**.

A collation can also be used in an **ORDER BY** clause.

A collation can be used in the **GROUP BY** clause.

```
CREATE TABLE t (id INTEGER PRIMARY KEY, name VARCHAR(20) COLLATE "English")
SELECT * FROM t ORDER BY name COLLATE "French"
SELECT COUNT(*), name FROM t GROUP BY name COLLATE "English 0"
```

In the examples above, the collation for the column is already specified when it is defined. In the first **SELECT** statement, the column is sorted using the French collation. In the second **SELECT**, the "English 0" collation is used in the **GROUP BY** clause. This collation is case insensitive, so the same name with different uses of upper and lower case letters is considered the same and counted together.

The supported collations are named according to the language. You can see the list in the **INFORMATION_SCHEMA.COLLATIONS** view. You can use just the name in double quotes for the default form of the collation. If you add a strength between 0, 1, 2, 3, the case sensitivity and accent sensitivity changes. The value 0 indicates least sensitivity to differences. At this strength the collation is case-insensitive and ignores differences between accented letters. At strength 1, differences between accented letters are taken into account. At strength 2, both case and accent are significant. Finally 3 indicates additional sensitivity to different punctuation. A second parameter can also be used with values 0 or 1, to indicate how decomposition of accented characters for comparison is handled for languages that support such characters. See the Java and ICU (International Components for Unicode) collation documentation for more details on these values. For example, possible forms of the French collation are "French", "French 0", "French 1", etc. and "French 2 1", etc. When the collation is specified without strength, it seems the system defaults to strength 2, which is case and accent sensitive.

When a collation is not explicitly used in the **CREATE TABLE** statement for a column, then the database default collation is used for this column. If you change the database default collation afterwards, the new collation will be used.

With the older versions of HyperSQL the special type **VARCHAR_IGNORECASE** was used as the column type for case-insensitive comparison. Any column already defined as **VARCHAR_IGNORECASE** will be compared exactly as before. In version 2.3.0 and later, this form is represented by the addition of **UCC** after the collation name, for example "French UCC". You can still use the **SET IGNORECASE TRUE** statement in your session to force the **UCC** to be applied to the collation for the **VARCHAR** columns of new tables. **UCC** stands for Upper Case Comparison. Before comparing two strings, both are converted to uppercase using the current collation. This is exactly how **VARCHAR_IGNORECASE** worked.

It is recommended to use the default **SQL_TEXT** collation for your general **CHAR** or **VARCHAR** columns. For columns where a language collation is desirable, the choice should be made very carefully, because names that are very similar but only differ in the accents may be considered equal in searches.

When comparing two strings, HyperSQL 2 pads the shorter string with spaces in order to compare two strings of equal length. You can change the default database collation with one that does not pad the string with spaces before comparison. This method of comparison was used in versions older than 2.

User defined collations can be created based on existing collations to control the space padding. These collations are part of the current schema.

See the `COLLATE` keyword and `SET DATABASE COLLATION` statement in the `System Management` chapter. The `PAD SPACE` or `NO PAD` clause is used to control padding.



Important

If you change the default collation of a database when there are tables containing data with `CHAR` or `VARCHAR` columns that are part of an index, a primary key or a unique constraint, you must execute `SHUTDOWN COMPACT` or `SHUTDOWN SCRIPT` after the change. If you do not do this, your queries and other statements will show erratic behaviour and may result in unrecoverable errors.

Distinct Types

A distinct, user-defined `TYPE` is simply based on a built-in type. A distinct `TYPE` is used in table definitions and in `CAST` statements.

Distinct types share a name-space with domains.

Domains

A `DOMAIN` is a user-defined type, simply based on a built-in type. A `DOMAIN` can have constraints that limit the values that the `DOMAIN` can represent. A `DOMAIN` can be used in table definitions and in `CAST` statements.

Distinct types share a name-space with domains.

Number Sequences

A `SEQUENCE` object produces `INTEGER` values in sequence. The `SEQUENCE` can be referenced in special contexts only within certain SQL statements. For each row where the object is referenced, its value is incremented.

There is a separate name-space for `SEQUENCE` objects.

`IDENTITY` columns are columns of tables which have an internal, unnamed `SEQUENCE` object. HyperSQL also supports `IDENTITY` columns that use a named `SEQUENCE` object.

`SEQUENCE` objects and `IDENTITY` columns are supported fully according to the latest SQL 2008 Standard syntax.

Sequences

The SQL:2008 syntax and usage is different from what is supported by many existing database engines. Sequences are created with the `CREATE SEQUENCE` command and their current value can be modified at any time with `ALTER SEQUENCE`. The next value for a sequence is retrieved with the `NEXT VALUE FOR <name>` expression. This expression can be used for inserting and updating table rows.

Example 4.1. inserting the next sequence value into a table row

```
INSERT INTO mytable VALUES 2, 'John', NEXT VALUE FOR mysequence
```

You can also use it in select statements. For example, if you want to number the returned rows of a `SELECT` in sequential order, you can use:

Example 4.2. numbering returned rows of a `SELECT` in sequential order

```
SELECT NEXT VALUE FOR mysequence, col1, col2 FROM mytable WHERE ...
```

In version 2.0, the semantics of sequences is exactly as defined by SQL:2008. If you use the same sequence twice in the same row in an `INSERT` statement, you will get the same value as required by the Standard.

The correct way to use a sequence value is the `NEXT VALUE FOR` expression.

HyperSQL adds an extension to Standard SQL to return the last value returned by the `NEXT VALUE FOR` expression in the current session. After a statement containing `NEXT VALUE FOR` is executed, the value that was returned for `NEXT VALUE FOR` is available using the `CURRENT VALUE FOR` expression. In the example below, the `NEXT VALUE FOR` expression is used to insert a new row. The value that was returned by `NEXT VALUE FOR` is retrieved with the `CURRENT VALUE FOR` in the next insert statements to populate two new rows in a different table that has a parent child relationship with the first table. For example if the value 15 was returned by the sequence, the same value 15 is inserted in the three rows.

Example 4.3. using the last value of a sequence

```
INSERT INTO mytable VALUES 2, 'John', NEXT VALUE FOR mysequence
INSERT INTO childtable VALUES 4, CURRENT VALUE FOR mysequence
INSERT INTO childtable VALUES 5, CURRENT VALUE FOR mysequence
```

The `INFORMATION_SCHEMA.SEQUENCES` table contains the next value that will be returned from any of the defined sequences. The `SEQUENCE_NAME` column contains the name and the `NEXT_VALUE` column contains the next value to be returned. Note that this is only for getting information and you should not use it for accessing the next sequence value. When multiple sessions access the same sequence, the value returned from this table by one session could also be used by a different session, causing a sequence value to be used twice unintentionally.

Identity Auto-Increment Columns

Each table can contain a single auto-increment column, known as the `IDENTITY` column. An `IDENTITY` column is a `SMALLINT`, `INTEGER`, `BIGINT`, `DECIMAL` or `NUMERIC` column with its value generated by a sequence generator.

In HyperSQL 2.0, an `IDENTITY` column is not by default treated as the primary key for the table (as a result, multi-column primary keys are possible with an `IDENTITY` column present). Use the SQL standard syntax for declaration of the `IDENTITY` column.

The SQL standard syntax is used, which allows the initial value and other options to be specified.

```
<colname> [ INTEGER | BIGINT | DECIMAL | NUMERIC ] GENERATED { BY DEFAULT | ALWAYS } AS IDENTITY [( <options> )]
```

```
/* this table has no primary key */
CREATE TABLE vals (id INTEGER GENERATED BY DEFAULT AS IDENTITY, data VARBINARY(2000))

/* in this table id becomes primary key because the old syntax is used - avoid this syntax */
CREATE TABLE vals (id INTEGER IDENTITY, data VARBINARY(2000))

/* use the standard syntax and explicitly declare a primary key identity column */
CREATE TABLE vals (id INTEGER GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY, data
VARBINARY(2000))
```

When you add a new row to such a table using an `INSERT INTO <tablename> ...` statement, you can use the `DEFAULT` keyword for the `IDENTITY` column, which results in an auto-generated value for the column.

The `IDENTITY()` function returns the last value inserted into any `IDENTITY` column by this session. Each session manages this function call separately and is not affected by inserts in other sessions. Use `CALL IDENTITY()` as an SQL statement to retrieve this value. If you want to use the value for a field in a child table, you can use `INSERT INTO <childtable> VALUES (... , IDENTITY(), ...)`. Both types of call to `IDENTITY()` must be made before any additional update or insert statements are issued by the session.

In triggers and routines, the value returned by the `IDENTITY()` function is correct for the given context. For example, if a call to a stored procedure inserts a row into a table, causing a new identity value to be generated, a call to `IDENTITY()` inside the procedure will return the new identity, but a call outside the procedure will return the last identity value that was generated before a call was made to the procedure.

The last inserted `IDENTITY` value can also be retrieved via JDBC, by specifying the `Statement` or `PreparedStatement` object to return the generated value.

The next `IDENTITY` value to be used can be changed with the following statement. Note that this statement is not used in normal operation and is only for special purposes, for example resetting the identity generator:

```
ALTER TABLE ALTER COLUMN <column name> RESTART WITH <new value>;
```

For backward compatibility, support has been retained for `CREATE TABLE <tablename>(<colname> IDENTITY, ...)` as a shortcut which defines the column both as an `IDENTITY` column and a `PRIMARY KEY` column. Also, for backward compatibility, it is possible to use `NULL` as the value of an `IDENTITY` column in an `INSERT` statement and the value will be generated automatically. You should avoid these compatibility features as they may be removed from future versions of HyperSQL.

In the following example, the identity value for the first `INSERT` statement is generated automatically using the `DEFAULT` keyword. The second `INSERT` statement uses a call to the `IDENTITY()` function to populate a row in the child table with the generated identity value.

```
CREATE TABLE star (id INTEGER GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY,
  firstname VARCHAR(20),
  lastname VARCHAR(20))
CREATE TABLE movies (starid INTEGER, movieid INTEGER PRIMARY KEY, title VARCHAR(40))
INSERT INTO star (id, firstname, lastname) VALUES (DEFAULT, 'Felix', 'the Cat')
INSERT INTO movies (starid, movieid, title) VALUES (IDENTITY(), 10, 'Felix in Hollywood')
```

HyperSQL 2.1 also supports `IDENTITY` columns that use an external, named `SEQUENCE` object. This feature is not part of the SQL Standard. The example below uses this type of `IDENTITY`. Note the use of `CURRENT VALUE FOR seq` here is multi-session safe. The returned value is the last value used by this session when the row was inserted into the star table. This value is available until the transaction is committed. After commit, `NULL` is returned by the `CURRENT VALUE FOR` expression until the `SEQUENCE` is used again.

```
CREATE SEQUENCE seq
CREATE TABLE star (id INTEGER GENERATED BY DEFAULT AS SEQUENCE seq PRIMARY KEY,
  firstname VARCHAR(20),
  lastname VARCHAR(20))
CREATE TABLE movies (starid INTEGER, movieid INTEGER PRIMARY KEY, title VARCHAR(40))
INSERT INTO star (id, firstname, lastname) VALUES (DEFAULT, 'Felix', 'the Cat')
INSERT INTO movies (starid, movieid, title) VALUES (CURRENT VALUE FOR seq, 10, 'Felix in
Hollywood')
```

Tables

In the SQL environment, tables are the most essential components, as they hold all persistent data.

If `TABLE` is considered as metadata (i.e. without its actual data) it is called a *relation* in relational theory. It has one or more columns, with each column having a distinct name and a data type. A table usually has one or more constraints which limit the values that can potentially be stored in the `TABLE`. These constraints are discussed in the next section.

A single column of the table can be defined as **IDENTITY**. The values stored in this column are auto-generated and are based on an (unnamed) identity sequence, or optionally, a named **SEQUENCE** object.

Views

A **VIEW** is similar to a **TABLE** but it does not permanently contain rows of data. A view is defined as a **QUERY EXPRESSION**, which is often a **SELECT** statement that references views and tables, but it can also consist of a **TABLE CONSTRUCTOR** that does not reference any tables or views.

A view has many uses:

- Hide the structure and column names of tables. The view can represent one or more tables or views as a separate table. This can include aggregate data, such as sums and averages, from other tables.
- Allow access to specific rows in a table. For example, allow access to records that were added since a given date, while hiding older records.
- Allow access to specific columns. For example allow access to columns that contain non-confidential information. Note that this can also be achieved with the **GRANT SELECT** statement, using column-level privileges

A **VIEW** that returns the columns of a single ordinary **TABLE** is *updatable* if the query expression of the view is an updatable query expression as discussed in the *Data Access and Change* chapter. Some *updatable* views are *insertable-into* because the query expression is insertable-into. In these views, each column of the query expressions must be a column of the underlying table and those columns of the underlying table that are not in the view must have a default clause, or be an **IDENTITY** or **GENERATED** column. When rows of an updatable view are updated, or new rows are inserted, or rows are deleted, these changes are reflected in the base table. A **VIEW** definition may specify that the inserted or updated rows conform to the search condition of the view. This is done with the **CHECK OPTION** clause.

A view that is not updatable according to the above paragraph can be made updatable or insertable-into by adding **INSTEAD OF** triggers to the view. These triggers contain statements to use the submitted data to modify the contents of the underlying tables of the view separately. For example, a view that represents a **SELECT** statements that joins two tables can have an **INSTEAD OF DELETE** trigger with two **DELETE** statements, one for each table. Views that have an **INSTEAD OF** trigger are called **TRIGGER INSERTABLE**, **TRIGGER UPDATABLE**, etc. according to the triggers that have been defined.

Views share a name-space with tables.

Constraints

A **CONSTRAINT** is a child schema object and can belong to a **DOMAIN** or a **TABLE**. **CONSTRAINT** objects can be defined without specifying a name. In this case the system generates a name for the new object beginning with "SYS_".

In a **DOMAIN**, **CHECK** constraints can be defined that limits the value represented by the **DOMAIN**. These constraints work exactly like a **CHECK** constraint on a single column of a table as described below.

In a **TABLE**, a constraint takes three basic forms.

CHECK

A **CHECK** constraint consists of a `<search condition>` that must not be false (can be unknown) for each row of the table. The `<search condition>` can reference all the columns of the current row, and if it contains a `<subquery>`, other tables and views in the database (excluding its own table).

NOT NULL

A simple form of check constraint is the NOT NULL constraint, which applies to a single column.

UNIQUE

A UNIQUE constraint is based on an equality comparison of values of specific columns (taken together) of one row with the same values from each of the other rows. The result of the comparison must never be true (can be false or unknown). If a row of the table has NULL in any of the columns of the constraint, it conforms to the constraint. A unique constraint on multiple columns (c1, c2, c3, ..) means that in no two rows, the sets of values for the columns can be equal unless at least one of them is NULL. Each single column taken by itself can have repeat values in different rows. The following example satisfies a UNIQUE constraint on the two columns

Example 4.4. Column values which satisfy a 2-column UNIQUE constraint

1,	2
2,	1
2,	2
NULL,	1
NULL,	1
1,	NULL
NULL,	NULL
NULL,	NULL

If the SET DATABASE SQL UNIQUE NULLS FALSE has been set, then if not all the values set of columns are null, the not null values are compared and it is disallowed to insert identical rows that contain at least one not-null value.

PRIMARY KEY

A PRIMARY KEY constraint is equivalent to a UNIQUE constraint on one or more NOT NULL columns. Only one PRIMARY KEY can be defined in each table.

FOREIGN KEY

A FOREIGN key constraint is based on an equality comparison between values of specific columns (taken together) of each row with the values of the columns of a UNIQUE constraint on another table or the same table. The result of the comparison must never be false (can be unknown). A special form of FOREIGN KEY constraint, based on its CHECK clause, allows the result to be unknown only if the values for all columns are NULL. A FOREIGN key can be declared only if a UNIQUE constraint exists on the referenced columns.

Constraints share a name space with assertions.

Assertions

An ASSERTION is a top-level schema objects. It consists of a <search condition> that must not be false (can be unknown). HyperSQL does not yet support assertions.

Assertions share a name-space with constraints

Triggers

A TRIGGER is a child schema object that always belongs to a TABLE or a VIEW.

Each time a DELETE, UPDATE or INSERT is performed on the table or view, additional actions are taken by the triggers that have been declared on the table or view.

Triggers are discussed in detail in Triggers chapter.

Routines

Routines are user-defined functions or procedures. The names and usage of functions and procedures are different. FUNCTION is a routine that can be referenced in many types of statements. PROCEDURE is a routine that can be referenced only in a CALL statement.

There is a separate name-space for routines.

Because of the possibility of overloading, each routine can have more than one name. The name of the routine is the same for all overloaded variants, but each variant has a *specific name*, different from all other routine names and specific names in the schema. The *specific name* can be specified in the routine definition statement. Otherwise it is assigned by the engine. The specific name is used only for schema manipulation statements, which need to reference a specific variant of the routine. For example, if a routine has two signatures, each signature has its own *specific name*. This allows the user to drop one of the signatures while keeping the other.

Routines are discussed in detail in chapter [SQL-Invoked Routines](#) .

Indexes

Indexes are an implementation-defined extension to the SQL Standard. HyperSQL has a dedicated name-space for indexes in each schema.

Synonyms

Synonyms are user-defined names that refer to other schema objects. Synonyms can be defined for TABLE, VIEW, SEQUENCE, PROCEDURE and FUNCTION names and used in SELECT, UPDATE, CALL, etc. statements. They cannot be used in DDL statements. Synonyms are in schemas, but they are used without a schema qualifier. When used, a synonym is immediately translated to the target name and the target name is used in the actual statement. The access privileges to the target object are checked.

```
CREATE SYNONYM REG FOR OTHER_SCHEMA.REGISTRATION_DETAIL_TABLE

SELECT R_ID, R_DATE FROM REG WHERE R_DATA > CURRENT_DATE - 3 DAY
```

A synonym cannot be the same as the name of any existing object in the schema.

Statements for Schema Definition and Manipulation

Schemas and schema objects can be created, modified and dropped. The SQL Standard defines a range of statements for this purpose. HyperSQL supports many additional statements, especially for changing the properties of existing schema objects.

Common Elements and Statements

These elements and statements are used for different types of object. They are described here, before the statements that can use them.

identifier

definition of identifier

```
<identifier> ::= <regular identifier> | <delimited identifier> | <SQL language identifier>
```

```
<delimited identifier> ::= <double quote> <character sequence> <double quote>
```

`<regular identifier> ::= <special character sequence>`

`<SQL language identifier> ::= <special character sequence>`

A `<delimited identifier>` is a sequence of characters enclosed with double-quote symbols. All characters are allowed in the character sequence.

A `<regular identifier>` is a special sequence of characters. It consists of letters, digits and the underscore characters. It must begin with a letter. All the letters are translated to their upper-case version.

The database setting, `SET DATABASE SQL REGULAR NAMES FALSE` can be used to relax the rules for regular identifier. With this setting, an underscore character can appear at the start of the regular identifier, and the dollar sign character can be used in the identifier.

A `<SQL language identifier>` is similar to `<regular identifier>` but the letters can range only from A-Z in the ASCII character set. This type of identifier is used for names of CHARACTER SET objects.

If the character sequence of a delimited identifier is the same as an undelimited identifier, it represents the same identifier. For example "JOHN" is the same identifier as JOHN. In a `<regular identifier>` the case-normal form is considered for comparison. This form consists of the upper-case equivalent of all the letters. When a database object is created with one of the CREATE statements or renamed with the ALTER statement, if the name is enclosed in double quotes, the exact name is used as the case-normal form. But if it is not enclosed in double quotes, the name is converted to uppercase and this uppercase version is stored in the database as the case-normal form.

The character sequence length of all identifiers must be between 1 and 128 characters.

A reserved word is one that is used by the SQL Standard for special purposes. It is similar to a `<regular identifier>` but it cannot be used as an identifier for user objects. If a reserved word is enclosed in double quote characters, it becomes a quoted identifier and can be used for database objects.

Case sensitivity rules for identifiers can be described simply as follows:

- all parts of SQL statements are converted to upper case before processing, *except identifiers in double quotes and strings in single quotes*
- identifiers, both unquoted and double quoted, are then treated as case-sensitive
- most database engines follow the same rule, except, in some respects, MySQL and MS SQLServer.

CASCADE or RESTRICT

drop behavior

`<drop behavior> ::= CASCADE | RESTRICT`

The `<drop behavior>` is a required element of statements that drop a SCHEMA or a schema object. If `<drop behavior>` is not specified then RESTRICT is implicit. It determines the effect of the statement if there are other objects in the catalog that reference the SCHEMA or the schema object. If RESTRICT is specified, the statement fails if there are referencing objects. If CASCADE is specified, all the referencing objects are modified or dropped with cascading effect. Whether a referencing object is modified or dropped, depends on the kind of schema object that is dropped.

IF EXISTS

drop condition (HyperSQL)

```
<if exists clause> ::= IF EXISTS
```

This clause is not part of the SQL standard and is a HyperSQL extension to some commands that drop objects (schemas, tables, views, sequences and indexes). If it is specified, then the statement does not return an error if the drop statement is issued on a non-existent object.

IF NOT EXISTS

create condition (HyperSQL)

```
<if not exists clause> ::= IF NOT EXISTS
```

This clause is not part of the SQL standard and is a HyperSQL extension to CREATE statements that create tables, views, sequences and indexes, as well as ALTER TABLE ... ADD CONSTRAINT statements. If it is specified, then the statement does not return an error if the create statement is for an object name that already exists.

SPECIFIC

specific routine designator

```
<specific routine designator> ::= SPECIFIC <routine type> <specific name>
```

```
<routine type> ::= ROUTINE | FUNCTION | PROCEDURE
```

This clause is used in statements that need to specify one of the multiple versions of an overloaded routine. The <specific name> is the one specified in the <routine definition> statement. The keyword ROUTINE can be used instead of either FUNCTION or PROCEDURE.

Renaming Objects

RENAME

rename statement (HyperSQL)

```
<rename statement> ::= ALTER <object type> <name> RENAME TO <new name>
```

```
<object type> ::= CATALOG | SCHEMA | DOMAIN | TYPE | TABLE | CONSTRAINT | INDEX  
| ROUTINE | SPECIFIC ROUTINE
```

```
<column rename statement> ::= ALTER TABLE <table name> ALTER COLUMN <name>  
RENAME TO <new name>
```

This statement is used to rename an existing object. It is not part of the SQL Standard. The specified <name> is the existing name, which can be qualified with a schema name, while the <new name> is the new name for the object.

Commenting Objects

COMMENT

comment statement (HyperSQL)

```
<comment statement> ::= COMMENT ON { TABLE | COLUMN | ROUTINE } <name> IS  
<character string literal>
```

Adds a comment to the object metadata, which can later be read from an INFORMATION_SCHEMA view. This command is not part of the SQL Standard. The strange syntax is due to compatibility with other database engines

that support the statement. The <name> is the name of a table, view, column or routine. The name of the column consists of dot-separated <table name> . <column name>. The name of the table, view or routine can be a simple name. All names can be qualified with a schema name. If there is already a comment on the object, the new comment will replace it.

The comments appear in the results returned by JDBC DatabaseMetaData methods, `getTables()` and `getColumns()`. The `INFORMATION_SCHEMA.SYSTEM_COMMENTS` view contains the comments. You can query this view using the schema, table, and column names to retrieve the comments.

Schema Creation

CREATE SCHEMA

schema definition

The `CREATE_SCHEMA` or `DBA` role is required in order to create a schema. A schema can be created with or without schema objects. Schema objects can always be added after creating the schema, or existing ones can be dropped. Within the <schema definition> statement, all schema object creation takes place inside the newly created schema. Therefore, if a schema name is specified for the schema objects, the name must match that of the new schema. In addition to statements for creating schema objects, the statement can include instances of <grant statement> and <role definition>. This is a curious aspect of the SQL standard, as these elements do not really belong to schema creation.

```
<schema definition> ::= CREATE SCHEMA <schema name clause> [ <schema character set specification> ] [ <schema element>... ]
```

```
<schema name clause> ::= <schema name> | AUTHORIZATION <authorization identifier>
| <schema name> AUTHORIZATION <authorization identifier>
```

If the name of the schema is specified simply as <schema name>, then the `AUTHORIZATION` is the current user. Otherwise, the specified <authorization identifier> is used as the `AUTHORIZATION` for the schema. If <schema name> is omitted, then the name of the schema is the same as the specified <authorization identifier>.

```
<schema element> ::= <table definition> | <view definition> | <domain definition>
| <character set definition> | <collation definition> | <transliteration definition>
| <assertion definition> | <trigger definition> | <user-defined type definition>
| <user-defined cast definition> | <user-defined ordering definition>
| <transform definition> | <schema routine> | <sequence generator definition>
| <grant statement> | <role definition>
```

An example of the statement is given below. Note that a single semicolon appears at the end. There should be no semicolon between the statements:

```
CREATE SCHEMA ACCOUNTS AUTHORIZATION DBA
CREATE TABLE AB(A INTEGER, ...)
CREATE TABLE CD(C CHAR(10), ...)
CREATE VIEW VI AS SELECT ...
GRANT SELECT ON AB TO PUBLIC
GRANT SELECT ON CD TO JOE;
```

It is not really necessary to create a schema and all its objects as one command. The schema can be created first, and its objects can be created one by one.

DROP SCHEMA

drop schema statement

```
<drop schema statement> ::= DROP SCHEMA [ IF EXISTS ] <schema name> [ IF EXISTS ]
<drop behavior>
```

This command destroys an existing schema. If `<drop behavior>` is `RESTRICT`, the schema must be empty, otherwise an error is raised. If `CASCADE` is specified as `<drop behavior>`, then all the objects contained in the schema are destroyed with a `CASCADE` option.

Table Creation

CREATE TABLE

table definition

```
<table definition> ::= CREATE [ { <table scope> | <table type> } ] TABLE [ IF
NOT EXISTS ] <table name> <table contents source> [ ON COMMIT { PRESERVE |
DELETE } ROWS ]
```

```
<table scope> ::= { GLOBAL | LOCAL } TEMPORARY
```

```
<table type> ::= MEMORY | CACHED
```

```
<table contents source> ::= <table element list> | <as subquery clause>
```

```
<table element list> ::= <left paren> <table element> [ { <comma> <table
element> }... ] <right paren>
```

```
<table element> ::= <column definition> | <table constraint definition> | <like
clause>
```

like clause

A `<like clause>` copies all column definitions from another table into the newly created table. Its three options indicate if the `<default clause>`, `<identity column specification>` and `<generation clause>` associated with the column definitions are copied or not. If an option is not specified, it defaults to `EXCLUDING`. The `<generation clause>` refers to columns that are generated by an expression but not to identity columns. All `NOT NULL` constraints are copied with the original columns, other constraints are not. The `<like clause>` can be used multiple times, allowing the new table to have copies of the column definitions of one or more other tables.

```
CREATE TABLE t (id INTEGER PRIMARY KEY, LIKE atable INCLUDING DEFAULTS EXCLUDING IDENTITY)
```

```
<like clause> ::= LIKE <tablename> [ <like options> ]
```

```
<like options> ::= <like option>...
```

```
<like option> ::= <identity option> | <column default option> | <generation
option>
```

```
<identity option> ::= INCLUDING IDENTITY | EXCLUDING IDENTITY
```

```
<column default option> ::= INCLUDING DEFAULTS | EXCLUDING DEFAULTS
```

```
<generation option> ::= INCLUDING GENERATED | EXCLUDING GENERATED
```

as subquery clause

```
<as subquery clause> ::= [ <left paren> <column name list> <right paren> ] AS
<table subquery> { WITH NO DATA | WITH DATA }
```

An `<as subquery clause>` used in table definition creates a table based on a `<table subquery>`. This kind of table definition is similar to a view definition. If `WITH DATA` is specified, then the new table will contain the rows of data returned by the `<table subquery>`.

```
CREATE TABLE t (a, b, c) AS (SELECT * FROM atable) WITH DATA
```

column definition

A column definition consists of a `<column name>` and in most cases a `<data type>` or `<domain name>` as minimum. The other elements of `<column definition>` are optional. Each `<column name>` in a table is unique.

```
<column definition> ::= <column name> [ <data type or domain name> ]
[ <default clause> | <identity column specification> | <identity column sequence
specification> | <generation clause> ] [ <update clause> ] [ <column constraint
definition>... ] [ <collate clause> ]
```

```
<data type or domain name> ::= <data type> | <domain name>
```

```
<column constraint definition> ::= [ <constraint name definition> ] <column
constraint> [ <constraint characteristics> ]
```

```
<column constraint> ::= NOT NULL | <unique specification> | <references
specification> | <check constraint definition>
```

A `<column constraint definition>` is a shortcut for a `<table constraint definition>`. A constraint that is defined in this way is automatically turned into a table constraint. A name is automatically generated for the constraint and assigned to it.

If a `<collate clause>` is specified, then a `UNIQUE` or `PRIMARY KEY` constraint or an `INDEX` on the column will use the specified collation. Otherwise the default collation for the database is used.

GENERATED

generated columns

The value of a column can be autogenerated in two ways.

One way is specific to columns of integral types (`INTEGER`, `BIGINT`, etc.) and associates a sequence generator with the column. When a new row is inserted into the table, the value of the column is generated as the next available value in the sequence.

The SQL Standard supports the use of unnamed sequences with the `IDENTITY` keyword. In addition, HyperSQL supports the use of a named `SEQUENCE` object, which must be in the same schema as the table.

```
<identity column specification> ::= GENERATED { ALWAYS | BY DEFAULT } AS IDENTITY
[ <left paren> <common sequence generator options> <right paren> ]
```

```
<identity column sequence specification ::= GENERATED BY DEFAULT AS SEQUENCE
<sequence name>
```

The `<identity column specification>` or `<identity column sequence specification>` can be specified for only a single column of the table.

The `<identity column specification>` is used for columns which represent values based on an unnamed sequence generator. It is possible to insert a row into the table without specifying a value for the column. The value is

then generated by the sequence generators according to its rules. An identity column may or may not be the primary key. Example below:

```
CREATE TABLE t (id INTEGER GENERATED ALWAYS AS IDENTITY(START WITH 100), name VARCHAR(20)
PRIMARY KEY)
```

The `<identity column sequence specification>` is used when the column values are based on a named SEQUENCE object (which must already exist). Example below:

```
CREATE TABLE t (id INTEGER GENERATED BY DEFAULT AS SEQUENCE s, name VARCHAR(20) PRIMARY KEY)
```

Inserting rows is done in the same way for a named or unnamed sequence generator. In both cases, if no value is specified to be inserted, or the DEFAULT keyword is used for the column, the value is generated by the sequence generator. If a value is specified, this value is used if the column definition has the BY DEFAULT specification. If the column definition has the ALWAYS specification, a value can be specified but the OVERRIDING SYSTEM VALUES must be specified in the INSERT statement.

The other way in which the column value is autogenerated is by using the values of other columns in the same row. This method is often used to create an index on a value that is derived from other column values.

```
<generation clause> ::= GENERATED ALWAYS AS <generation expression>
```

```
<generation expression> ::= <left paren> <value expression> <right paren>
```

The `<generation clause>` is used for special columns which represent values based on the values held in other columns in the same row. The `<value expression>` must reference only other, non-generated, columns of the table in the same row. Any function used in the expression must be deterministic and must not access SQL-data. No `<query expression>` is allowed. When `<generation clause>` is used, `<data type>` must be specified.

A generated column can be part of a foreign key or unique constraints or a column of an index. This capability is the main reason for using generated columns. A generated column may contain a formula that computes a value based on the values of other columns. Fast searches of the computed value can be performed when an index is declared on the generated column. Or the computed values can be declared to be unique, using a UNIQUE constraint on the table. The computed column cannot be overridden by user supplied values. When a row is updated and the column values change, the generated columns are computed with the new values.

When a row is inserted into a table, or an existing row is updated, no value except DEFAULT can be specified for a generated column. In the example below, data is inserted into the non-generated columns and the generated column will contain 'Felix the Cat' or 'Pink Panther'.

```
CREATE TABLE t (id INTEGER PRIMARY KEY,
  firstname VARCHAR(20),
  lastname VARCHAR(20),
  fullname VARCHAR(40) GENERATED ALWAYS AS (firstname || ' ' || lastname))
INSERT INTO t (id, firstname, lastname) VALUES (1, 'Felix', 'the Cat')
INSERT INTO t (id, firstname, lastname, fullname) VALUES (2, 'Pink', 'Panther', DEFAULT)
```

DEFAULT

default clause

A default clause can be used if GENERATED is not specified. If a column has a `<default clause>` then it is possible to insert a row into the table without specifying a value for the column.

```
<default clause> ::= DEFAULT <default option>
```

```
<default option> ::= <literal> | <datetime value function> | USER | CURRENT_USER
| CURRENT_ROLE | SESSION_USER | SYSTEM_USER | CURRENT_CATALOG | CURRENT_SCHEMA
| CURRENT_PATH | NULL
```

The type of the `<default option>` must match the type of the column.

In PGS (PostgreSQL) compatibility mode, a NEXTVAL function can be used. Also, in MSS compatibility mode, the default value can be enclosed in parentheses.

ON UPDATE

on update clause

If a column has a `<on update clause>` then every time an UPDATE or MERGE statement updates the values of the other columns of the row, the value in this column is updated to the CURRENT_TIMESTAMP. If the UPDATE statement explicitly updates this column, then the explicit value is used instead of CURRENT_TIMESTAMP.

```
<on update clause> ::= ON UPDATE CURRENT_TIMESTAMP
```

The type of the column must be `TIMESTAMP` or `TIMESTAMP WITH TIME ZONE`.

This feature is similar to MySQL's ON UPDATE clause.

CONSTRAINT

constraint name and characteristics

```
<constraint name definition> ::= CONSTRAINT <constraint name>
```

```
<constraint characteristics> ::= <constraint check time> [ [ NOT ] DEFERRABLE
[ <constraint check time> ] ]
```

```
<constraint check time> ::= INITIALLY DEFERRED | INITIALLY IMMEDIATE
```

Specify the name of a constraint and its characteristics. By default the constraint is `NOT DEFERRABLE` and `INITIALLY IMMEDIATE`. This means the constraint is enforced as soon as a data change statement is executed. If `INITIALLY DEFERRED` is specified, then the constraint is enforced when the session commits. The characteristics must be compatible. The constraint check time can be changed temporarily for an SQL session. HyperSQL does not support deferring constraint enforcement. This feature of the SQL Standard has been criticised because it allows a session to read uncommitted data that violates database integrity constraints but has not yet been checked.

CONSTRAINT

table constraint definition

```
<table constraint definition> ::= [ <constraint name definition> ] <table
constraint> [ <constraint characteristics> ]
```

```
<table constraint> ::= <unique constraint definition> | <referential constraint
definition> | <check constraint definition>
```

Three kinds of constraint can be defined on a table: `UNIQUE` (including `PRIMARY KEY`), `FOREIGN KEY` and `CHECK`. Each kind has its own rules to limit the values that can be specified for different columns in each row of the table.

UNIQUE

unique constraint definition

```
<unique constraint definition> ::= <unique specification> <left paren> <unique
column list> <right paren> | UNIQUE ( VALUE )
```

```
<unique specification> ::= UNIQUE | PRIMARY KEY
```

```
<unique column list> ::= <column name list>
```

A unique constraint is specified on a single column or on multiple columns. On each set of columns taken together, only one UNIQUE constraint can be specified. Each column of a PRIMARY KEY constraint has an implicit NOT NULL constraint.

If UNIQUE(VALUE) is specified, the constraint created on all columns of the table.

FOREIGN KEY

referential constraint definition

```
<referential constraint definition> ::= FOREIGN KEY <left paren> <referencing
columns> <right paren> <references specification>
```

```
<references specification> ::= REFERENCES <referenced table and columns> [ MATCH
<match type> ] [ <referential triggered action> ]
```

```
<match type> ::= FULL | PARTIAL | SIMPLE
```

```
<referencing columns> ::= <reference column list>
```

```
<referenced table and columns> ::= <table name> [ <left paren> <reference column
list> <right paren> ]
```

```
<reference column list> ::= <column name list>
```

```
<referential triggered action> ::= <update rule> [ <delete rule> ] | <delete
rule> [ <update rule> ]
```

```
<update rule> ::= ON UPDATE <referential action>
```

```
<delete rule> ::= ON DELETE <referential action>
```

```
<referential action> ::= CASCADE | SET NULL | SET DEFAULT | RESTRICT | NO ACTION
```

A referential constraint allows links to be established between the rows of two tables. The specified list of <referencing columns> corresponds one by one to the columns of the specified list of <referenced columns> in another table (or sometimes in the same table). For each row in the table, a row must exist in the referenced table with equivalent values in the two column lists. There must exist a single unique constraint in the referenced table on all the <referenced columns>.

The [MATCH match type] clause is optional and has an effect only on multi-column foreign keys and only on rows containing at least a NULL in one of the <referencing columns>. If the clause is not specified, MATCH SIMPLE is the default. If MATCH SIMPLE is specified, then any NULL means the row can exist (without a corresponding row in the referenced table). If MATCH FULL is specified then either all the column values must be NULL or none of them. MATCH PARTIAL allows any NULL but the non NULL values must match those of a row in the referenced table. HyperSQL does not support MATCH PARTIAL.

Referential actions are specified with ON UPDATE and ON DELETE clauses. These actions take place when a row in the referenced table (the parent table) has referencing rows in the referencing table and it is deleted or modified with any SQL statement. The default is NO ACTION. This means the SQL statement that causes the DELETE or

UPDATE is terminated with an exception. The RESTRICT option is similar and works exactly the same without deferrable constraints (which are not allowed by HyperSQL). The other three options, CASCADE, SET NULL and SET DEFAULT all allow the DELETE or UPDATE statement to complete. With DELETE statements the CASCADE option results in the referencing rows to be deleted. With UPDATE statements, the changes to the values of the referenced columns are copied to the referencing rows. With both DELETE or UPDATE statement, the SET NULL option results in the columns of the referencing rows to be set to NULL. Similarly, the SET DEFAULT option results in the columns of the referencing rows to be set to their default values.

CHECK

check constraint definition

```
<check constraint definition> ::= CHECK <left paren> <search condition> <right paren>
```

A CHECK constraint can exist for a TABLE or for a DOMAIN. The <search condition> evaluates to an SQL BOOLEAN value for each row of the table. Within the <search condition> all columns of the table row can be referenced. For all rows of the table, the <search condition> evaluates to TRUE or UNKNOWN. When a new row is inserted, or an existing row is updated, the <search condition> is evaluated and if it is FALSE, the insert or update fails.

A CHECK constraint for a DOMAIN is similar. In its <search condition>, the term VALUE is used to represent the value to which the DOMAIN applies.

```
CREATE TABLE t (a VARCHAR(20) CHECK (a IS NOT NULL AND CHARACTER_LENGTH(a) > 2))
```

The search condition of a CHECK constraint cannot contain any function that is not deterministic. A check constraint is a data integrity constraint, therefore it must hold with respect to the rest of the data in the database. It cannot use values that are temporal or ephemeral. For example CURRENT_USER is a function that returns different values depending on who is using the database, or CURRENT_DATE changes day-to-day. Some temporal expressions are retrospectively deterministic and are allowed in check constraints. For example, (CHECK VALUE < CURRENT_DATE) is valid, because CURRENT_DATE will not move backwards in time, but (CHECK VALUE > CURRENT_DATE) is not acceptable.

If you want to enforce the condition that a date value that is inserted into the database belongs to the future (at the time of insertion), or any similar constraint, then use a TRIGGER with the desired condition.

DROP TABLE

drop table statement

```
<drop table statement> ::= DROP TABLE [ IF EXISTS ] <table name> [ IF EXISTS ]  
<drop behavior>
```

Destroy a table. The default drop behaviour is RESTRICT and will cause the statement to fail if there is any view, routine or foreign key constraint that references the table. If <drop behavior> is CASCADE, it causes all schema objects that reference the table to drop. Referencing views are dropped. In the case of foreign key constraints that reference the table, the constraint is dropped, rather than the TABLE or DOMAIN that contains it.

Table Manipulation

Table manipulation statements change the attributes of tables or modify the objects such as columns and constraints.

SET TABLE CLUSTERED

set table clustered property

```
<set table clustered statement> ::= SET TABLE <table name> CLUSTERED ON <left paren> <column name list> <right paren>
```

Set the row clustering property of a table. The <column name list> is a list of column names that must correspond to the columns of an existing PRIMARY KEY, UNIQUE or FOREIGN KEY index, or to the columns of a user defined index. This statement is only valid for CACHED or TEXT tables.

Tables rows are stored in the database files as they are created, sometimes at the end of the file, sometimes in the middle of the file. After a CHECKPOINT DEFRAG or SHUTDOWN COMPACT, the rows are reordered according to the primary key of the table, or if there is no primary key, in no particular order.

When several consecutive rows of a table are retrieved during query execution it is more efficient to retrieve rows that are stored adjacent to one another. After executing this command, nothing changes until a CHECKPOINT DEFRAG or SHUTDOWN COMPACT or SHUTDOWN SCRIPT is performed. After these operations, the rows are stored in the specified clustered order. The property is stored in the database and applies to all future reordering of rows. Note that if extensive inserts or updates are performed on the tables, the rows will get out of order until the next reordering.

SET TABLE TYPE

set table type

```
<set table type statement> ::= SET TABLE <table name> TYPE { MEMORY | CACHED }
```

Changes the storage type of an existing table between CACHED and MEMORY types.

Only a user with the DBA role can execute this statement.

SET TABLE writeability

set table write property

```
<set table read only statement> ::= SET TABLE <table name> { READ ONLY | READ WRITE }
```

Set the writeability property of a table. Tables are writeable by default. This statement can be used to change the property between READ ONLY and READ WRITE. This is a feature of HyperSQL.

SET TABLE SOURCE

set table source statement

```
<set table source statement> ::= SET TABLE <table name> SOURCE <file and options> [DESC]
```

```
<file and options> ::= <doublequote> <file path> [<semicolon> <property>...] <doublequote>
```

Set the text source for a text table. This statement cannot be used for tables that are not defined as TEXT TABLE.

Supported Properties

quoted = { true false }	default is true. If false, treats double quotes as normal characters
all_quoted = { true false }	default is false. If true, adds double quotes around all fields.
encoding = <encoding name>	character encoding for text and character fields, for example, encoding=UTF-8. UTF-16 cannot be used.

<code>ignore_first = { true false }</code>	default is false. If true ignores the first line of the file
<code>cache_rows= <numeric value></code>	rows of the text file in the cache. Default is 1000 rows
<code>cache_size = <numeric value>r</code>	total size of the row in the cache. Default is 100 KB.
<code>cache_scale= <numeric value></code> and <code>cache_size_scale = <numeric value></code>	deprecated properties, replaced by <code>cached_rows</code> and <code>cache_size</code> properties above.
<code>fs = <unquoted character></code>	field separator
<code>vs = <unquoted character></code>	varchar separator

Special indicators for HyperSQL Text Table separators

<code>\semi</code>	semicolon
<code>\quote</code>	quote
<code>\space</code>	space character
<code>\apos</code>	apostrophe
<code>\n</code>	newline - Used as an end anchor (like \$ in regular expressions)
<code>\r</code>	carriage return
<code>\t</code>	tab
<code>\\</code>	backslash
<code>\u####</code>	a Unicode character specified in hexadecimal

In the example below, the text source of the table is set to "myfile", the field separator to the pipe symbol, and the varchar separator to the tilde symbol.

```
SET TABLE mytable SOURCE 'myfile;fs=|;vs=.;vs=~'
```

Only a user with the DBA role can execute this statement.

SET TABLE SOURCE HEADER

set table source header statement

```
<set table source header statement> ::= SET TABLE <table name> SOURCE HEADER  
<header string>
```

Set the header for the text source for a text table. If this command is used, the `<header string>` is used as the first line of the source file of the text table. This line is not part of the table data. Only a user with the DBA role can execute this statement.

SET TABLE SOURCE on-off

set table source on-off statement

```
<set table source on-off statement> ::= SET TABLE <table name> SOURCE { ON | OFF }
```

Attach or detach a text table from its text source. This command does not change the properties or the name of the file that is the source of a text table. When OFF is specified, the command detaches the table from its source and closes the file for the source. In this state, it is not possible to read or write to the table. This allows the user to replace the file with a different file, or delete it. When ON is specified, the source file is read. Only a user with the DBA role can execute this statement

ALTER TABLE

alter table statement

```
<alter table statement> ::= ALTER TABLE <table name> <alter table action>
```

```
<alter table action> ::= <add column definition> | <alter column definition>
| <drop column definition> | <add table constraint definition> | <drop table
constraint definition>
```

Change the definition of a table. Specific types of this statement are covered below.

ADD COLUMN

add column definition

```
<add column definition> ::= ADD [ COLUMN ] <column definition> [ BEFORE <other
column name> ]
```

Add a column to an existing table. The <column definition> is specified the same way as it is used in <table definition>. HyperSQL allows the use of [BEFORE <other column name>] to specify at which position the new column is added to the table.

If the table contains rows, the new column must have a <default clause> or use one of the forms of GENERATED. The column values for each row is then filled with the result of the <default clause> or the generated value.

DROP COLUMN

drop column definition

```
<drop column definition> ::= DROP [ COLUMN ] <column name> <drop behavior>
```

Destroy a column of a base table. The <drop behavior> is either RESTRICT or CASCADE. If the column is referenced in a table constraint that references other columns as well as this column, or if the column is referenced in a VIEW, or the column is referenced in a TRIGGER, then the statement will fail if RESTRICT is specified. If CASCADE is specified, then any CONSTRAINT, VIEW or TRIGGER object that references the column is dropped with a cascading effect.

ADD CONSTRAINT

add table constraint definition

```
<add table constraint definition> ::= ADD <table constraint definition>
```

Add a constraint to a table. The existing rows of the table must conform to the added constraint, otherwise the statement will not succeed.

DROP CONSTRAINT

drop table constraint definition

```
<drop table constraint definition> ::= DROP CONSTRAINT <constraint name> <drop behavior>
```

Destroy a constraint on a table. The `<drop behavior>` has an effect only on `UNIQUE` and `PRIMARY KEY` constraints. If such a constraint is referenced by a `FOREIGN KEY` constraint, the `FOREIGN KEY` constraint will be dropped if `CASCADE` is specified. If the columns of such a constraint are used in a `GROUP BY` clause in the query expression of a `VIEW` or another kind of schema object, and a functional dependency relationship exists between these columns and the other columns in that query expression, then the `VIEW` or other schema object will be dropped when `CASCADE` is specified.

ALTER COLUMN

alter column definition

```
<alter column definition> ::= ALTER [ COLUMN ] <column name> <alter column action>
```

```
<alter column action> ::= <set column default clause> | <drop column default clause> | <alter column data type clause> | <alter identity column specification> | <alter column nullability> | <alter column name> | <add column identity specification> | <drop column identity specification>
```

Change a column and its definition. Specific types of this statement are covered below. See also the `RENAME` statement above.

SET DEFAULT

set column default clause

```
<set column default clause> ::= SET <default clause>
```

Set the default clause for a column. This can be used if the column is not defined as `GENERATED`.

DROP DEFAULT

drop column default clause

```
<drop column default clause> ::= DROP DEFAULT
```

Drop the default clause from a column.

SET DATA TYPE

alter column data type clause

```
<alter column data type clause> ::= SET DATA TYPE <data type>
```

Change the declared type of a column. The latest SQL Standard allows only changes to type properties such as maximum length, precision, or scale, and only changes that cause the property to enlarge. HyperSQL allows changing the type if all the existing values can be cast into the new type without string truncation or loss of significant digits.

alter column add identity generator

alter column add identity generator

```
<add column identity generator> ::= <identity column specification>
```

Adds an identity specification to the column. The type of the column must be an integral type and the existing values must not include nulls. This option is specific to HyperSQL.

```
ALTER TABLE mytable ALTER COLUMN id GENERATED ALWAYS AS IDENTITY (START WITH 2000)
```

alter column identity generator

alter identity column specification

```
<alter identity column specification> ::= <alter identity column option>...
```

```
<alter identity column option> ::= <alter sequence generator restart option> |
SET <basic sequence generator option>
```

Change the properties of an identity column. This command is similar to the commands used for changing the properties of named SEQUENCE objects discussed earlier and can use the same options.

```
ALTER TABLE mytable ALTER COLUMN id RESTART WITH 1000
ALTER TABLE mytable ALTER COLUMN id SET INCREMENT BY 5
```

DROP GENERATED

drop column identity generator

```
<drop column identity specification> ::= DROP GENERATED
```

Removes the identity generator from a column. After executing this statement, the column values are no longer generated automatically. This option is specific to HyperSQL

```
ALTER TABLE mytable ALTER COLUMN id DROP GENERATED
```

SET [NOT] NULL

alter column nullability

```
<alter column nullability> ::= SET [ NOT ] NULL
```

Adds or removes a NOT NULL constraint from a column. This option is specific to HyperSQL

View Creation and Manipulation

CREATE VIEW

view definition

```
<view definition> ::= CREATE VIEW [ IF NOT EXISTS ] <table name> <view
specification> AS <query expression> [ WITH [ CASCADED | LOCAL ] CHECK OPTION ]
```

```
<view specification> ::= [ <left paren> <view column list> <right paren> ]
```

```
<view column list> ::= <column name list>
```

Define a view. The `<query expression>` is a SELECT or similar statement. The `<view column list>` is the list of unique names for the columns of the view. The number of columns in the `<view column list>` must match the number of columns returned by the `<query expression>`. If `<view column list>` is not specified, then the columns of the `<query expression>` should have unique names and are used as the names of the view column.

Some views are updatable. As covered elsewhere, an updatable view is based on a single table or updatable view. For updatable views, the optional `CHECK OPTION` clause can be specified. If this option is specified, then if a row of the view is updated or a new row is inserted into the view, then it should contain such values that the row would be included in the view after the change. If `WITH CASCADED CHECK OPTION` is specified, then if the `<query expression>` of the view references another view, then the search condition of the underlying view should also be satisfied by the update or insert operation.

DROP VIEW

drop view statement

```
<drop view statement> ::= DROP VIEW [ IF EXISTS ] <table name> [ IF EXISTS ]
<drop behavior>
```

Destroy a view. The `<drop behavior>` is similar to dropping a table.

ALTER VIEW

alter view statement

```
<alter view statement> ::= ALTER VIEW <table name> <view specification> AS
<query expression> [ WITH [ CASCADED | LOCAL ] CHECK OPTION ]
```

Alter a view. The statement is otherwise identical to `CREATE VIEW`. The new definition replaces the old. If there are database objects such as routines or views that reference the view, then these objects are recompiled with the new view definition. If the new definition is not compatible, the statement fails.

Domain Creation and Manipulation

CREATE DOMAIN

domain definition

```
<domain definition> ::= CREATE DOMAIN <domain name> [ AS ] <predefined type>
[ <default clause> ] [ <domain constraint>... ] [ <collate clause> ]
```

```
<domain constraint> ::= [ <constraint name definition> ] <check constraint
definition> [ <constraint characteristics> ]
```

Define a domain. Although a `DOMAIN` is not strictly a type in the SQL Standard, it can be informally considered as a type. A `DOMAIN` is based on a `<predefined type>`, which is a base type defined by the Standard. It can have a `<default clause>`, similar to a column default clause. It can also have one or more `CHECK` constraints which limit the values that can be assigned to a column or variable that has the `DOMAIN` as its type.

```
CREATE DOMAIN valid_string AS VARCHAR(20) DEFAULT 'NO VALUE' CHECK (value IS NOT NULL AND
CHARACTER_LENGTH(value) > 2)
```

ALTER DOMAIN

alter domain statement

```
<alter domain statement> ::= ALTER DOMAIN <domain name> <alter domain action>
```

```
<alter domain action> ::= <set domain default clause> | <drop domain default
clause> | <add domain constraint definition> | <drop domain constraint
definition>
```

Change a domain and its definition.

SET DEFAULT

set domain default clause

```
<set domain default clause> ::= SET <default clause>
```

Set the default value in a domain.

DROP DEFAULT

drop domain default clause

```
<drop domain default clause> ::= DROP DEFAULT
```

Remove the default clause of a domain.

ADD CONSTRAINT

add domain constraint definition

```
<add domain constraint definition> ::= ADD <domain constraint>
```

Add a constraint to a domain.

DROP CONSTRAINT

drop domain constraint definition

```
<drop domain constraint definition> ::= DROP CONSTRAINT <constraint name>
```

Destroy a constraint on a domain. If the `<drop behavior>` is `CASCADE`, and the constraint is a `UNIQUE` constraint which is referenced by a `FOREIGN KEY` constraint on another table, then the `FOREIGN KEY` constraint is also dropped.

DROP DOMAIN

drop domain statement

```
<drop domain statement> ::= DROP DOMAIN <domain name> <drop behavior>
```

Destroy a domain. If `<drop behavior>` is `CASCADE`, it works differently from most other objects. If a table features a column of the specified `DOMAIN`, the column survives and inherits the `DEFAULT CLAUSE`, and the `CHECK CONSTRAINT` of the `DOMAIN`.

Trigger Creation

CREATE TRIGGER

trigger definition

```
<trigger definition> ::= CREATE TRIGGER <trigger name> <trigger action time>  
<trigger event> ON <table name> [ REFERENCING <transition table or variable  
list> ] <triggered action>
```

```
<trigger action time> ::= BEFORE | AFTER | INSTEAD OF
```

```

<trigger event> ::= INSERT | DELETE | UPDATE [ OF <trigger column list> ]

<trigger column list> ::= <column name list>

<triggered action> ::= [ FOR EACH { ROW | STATEMENT } ] [ <triggered when
clause> ] <triggered SQL statement>

<triggered when clause> ::= WHEN <left paren> <search condition> <right paren>

<triggered SQL statement> ::= <SQL procedure statement> | BEGIN ATOMIC { <SQL
procedure statement> <semicolon> }... END | [QUEUE <integer literal>] [NOWAIT]
CALL <HSQLDB trigger class FQN>

<transition table or variable list> ::= <transition table or variable>...

<transition table or variable> ::= OLD [ ROW ] [ AS ] <old transition variable
name> | NEW [ ROW ] [ AS ] <new transition variable name> | OLD TABLE [ AS ]
<old transition table name> | NEW TABLE [ AS ] <new transition table name>

<old transition table name> ::= <transition table name>

<new transition table name> ::= <transition table name>

<transition table name> ::= <identifier>

<old transition variable name> ::= <correlation name>

<new transition variable name> ::= <correlation name>

```

Trigger definition is a relatively complex statement. The combination of <trigger action time> and <trigger event> determines the type of the trigger. Examples include BEFORE DELETE, AFTER UPDATE, INSTEAD OF INSERT. If the optional [OF <trigger column list>] is specified for an UPDATE trigger, then the trigger is activated only if one of the columns that is in the <trigger column list> is specified in the UPDATE statement that activates the trigger.

If a trigger is FOR EACH ROW, which is the default option, then the trigger is activated for each row of the table that is affected by the execution of an SQL statement. Otherwise, it is activated once only per statement execution. In the first case, there is a before and after state for each row. For UPDATE triggers, both before and after states exist, representing the row before the update, and after the update. For DELETE, triggers, there is only a before state. For INSERT triggers, there is only an after state. If a trigger is FOR EACH STATEMENT, then a transient table is created containing all the rows for the before state and another transient table is created for the after state.

The [REFERENCING <transition table or variable>] is used to give a name to the before and after data row or table. This name can be referenced in the <SQL procedure statement> to access the data.

The optional <triggered when clause> is a search condition, similar to the search condition of a DELETE or UPDATE statement. If the search condition is not TRUE for a row, then the trigger is not activated for that row.

The <SQL procedure statement> is limited to INSERT, DELETE, UPDATE and MERGE statements.

The <HSQLDB trigger class FQN> is a delimited identifier that contains the fully qualified name of a Java class that implements the org.hsqldb.Trigger interface.

HyperSQL do not yet allow the use of OLD TABLE or NEW TABLE in statement level trigger definitions.

DROP TRIGGER

drop trigger statement

<drop trigger statement> ::= DROP TRIGGER <trigger name>

Destroy a trigger.

Routine Creation

schema routine

SQL-invoked routine

<SQL-invoked routine> ::= <schema routine>

<schema routine> ::= <schema procedure> | <schema function>

<schema procedure> ::= CREATE <SQL-invoked procedure>

<schema function> ::= CREATE <SQL-invoked function>

<SQL-invoked procedure> ::= PROCEDURE <schema qualified routine name> <SQL parameter declaration list> <routine characteristics> <routine body>

<SQL-invoked function> ::= { <function specification> | <method specification designator> } <routine body>

<SQL parameter declaration list> ::= <left paren> [<SQL parameter declaration> [{ <comma> <SQL parameter declaration> }...]] <right paren>

<SQL parameter declaration> ::= [<parameter mode>] [<SQL parameter name>] <parameter type> [RESULT]

<parameter mode> ::= IN | OUT | INOUT

<parameter type> ::= <data type>

<function specification> ::= FUNCTION <schema qualified routine name> <SQL parameter declaration list> <returns clause> <routine characteristics> [<dispatch clause>]

<method specification designator> ::= SPECIFIC METHOD <specific method name> | [INSTANCE | STATIC | CONSTRUCTOR] METHOD <method name> <SQL parameter declaration list> [<returns clause>] FOR <schema-resolved user-defined type name>

<routine characteristics> ::= [<routine characteristic>...]

<routine characteristic> ::= <language clause> | <parameter style clause> | SPECIFIC <specific name> | <deterministic characteristic> | <SQL-data access indication> | <null-call clause> | <returned result sets characteristic> | <savepoint level indication>

<savepoint level indication> ::= NEW SAVEPOINT LEVEL | OLD SAVEPOINT LEVEL

<returned result sets characteristic> ::= DYNAMIC RESULT SETS <maximum returned result sets>

<parameter style clause> ::= PARAMETER STYLE <parameter style>

```

<dispatch clause> ::= STATIC DISPATCH

<returns clause> ::= RETURNS <returns type>

<returns type> ::= <returns data type> [ <result cast> ] | <returns table type>

<returns table type> ::= TABLE <table function column list>

<table function column list> ::= <left paren> <table function column list
element> [ { <comma> <table function column list element> }... ] <right paren>

<table function column list element> ::= <column name> <data type>

<result cast> ::= CAST FROM <result cast from type>

<result cast from type> ::= <data type> [ <locator indication> ]

<returns data type> ::= <data type> [ <locator indication> ]

<routine body> ::= <SQL routine spec> | <external body reference>

<SQL routine spec> ::= [ <rights clause> ] <SQL routine body>

<rights clause> ::= SQL SECURITY INVOKER | SQL SECURITY DEFINER

<SQL routine body> ::= <SQL procedure statement>

<external body reference> ::= EXTERNAL [ NAME <external routine name> ]
[ <parameter style clause> ]

<parameter style> ::= SQL | GENERAL

<deterministic characteristic> ::= DETERMINISTIC | NOT DETERMINISTIC

<SQL-data access indication> ::= NO SQL | CONTAINS SQL | READS SQL DATA |
MODIFIES SQL DATA

<null-call clause> ::= RETURNS NULL ON NULL INPUT | CALLED ON NULL INPUT

<maximum returned result sets> ::= <unsigned integer>

```

Define an SQL-invoked routine. A few of the options are not used by HyperSQL and have default behaviours. See the [SQL-Invoked Routines](#) chapter for more details of various options and examples.

ALTER routine

alter routine statement

```

<alter routine statement> ::= ALTER <specific routine designator> [ <alter
routine characteristics> ] [ RESTRICT ] <routine body>

<alter routine characteristics> ::= <alter routine characteristic>...

<alter routine characteristic> ::= <language clause> | <parameter style clause>
| <SQL-data access indication> | <null-call clause> | <returned result sets
characteristic>

<alter routine body> ::= <SQL routine body>

```

Alter the characteristic and the body of an SQL-invoked routine. If `RESTRICT` is specified and the routine is already used in a different routine or view definition, an exception is raised. Altering the routine changes the implementation without changing the parameters. Defining recursive SQL/PSM SQL functions is only possible by altering a non-recursive routine body. An example is given in the `SQL-Invoked Routines` chapter.

An example is given below for a function defined as a Java method, then redefined as an SQL function.

```
CREATE FUNCTION zero_pad(x BIGINT, digits INT, maxsize INT)
  RETURNS CHAR VARYING(100)
  SPECIFIC zero_pad_01
  NO SQL DETERMINISTIC
  LANGUAGE JAVA
  EXTERNAL NAME 'CLASSPATH:org.hsqldb.lib.StringUtil.toZeroPaddedString';

ALTER SPECIFIC ROUTINE zero_pad_01
  LANGUAGE SQL
  BEGIN ATOMIC
  DECLARE str VARCHAR(128);
  SET str = CAST(x AS VARCHAR(128));
  SET str = SUBSTRING('00000000000000' FROM 1 FOR digits - CHAR_LENGTH(str)) + str;
  return str;
END
```

DROP

drop routine statement

```
<drop routine statement> ::= DROP <specific routine designator> <drop behavior>
```

Destroy an SQL-invoked routine.

Sequence Creation

CREATE SEQUENCE

sequence generator definition

```
<sequence generator definition> ::= CREATE SEQUENCE [ IF NOT EXISTS ] <sequence generator name> [ <sequence generator options> ]
```

```
<sequence generator options> ::= <sequence generator option> ...
```

```
<sequence generator option> ::= <sequence generator data type option> | <common sequence generator options>
```

```
<common sequence generator options> ::= <common sequence generator option> ...
```

```
<common sequence generator option> ::= <sequence generator start with option> | <basic sequence generator option>
```

```
<basic sequence generator option> ::= <sequence generator increment by option> | <sequence generator maxvalue option> | <sequence generator minvalue option> | <sequence generator cycle option>
```

```
<sequence generator data type option> ::= AS <data type>
```

```
<sequence generator start with option> ::= START WITH <sequence generator start value>
```

```
<sequence generator start value> ::= <signed numeric literal>
```

```
<sequence generator increment by option> ::= INCREMENT BY <sequence generator increment>
```

```
<sequence generator increment> ::= <signed numeric literal>
```

```
<sequence generator maxvalue option> ::= MAXVALUE <sequence generator max value>
| NO MAXVALUE
```

```
<sequence generator max value> ::= <signed numeric literal>
```

```
<sequence generator minvalue option> ::= MINVALUE <sequence generator min value>
| NO MINVALUE
```

```
<sequence generator min value> ::= <signed numeric literal>
```

```
<sequence generator cycle option> ::= CYCLE | NO CYCLE
```

Define a named sequence generator. A SEQUENCE object generates a sequence of integers according to the specified rules. The simple definition without the options defines a sequence of numbers in INTEGER type starting at 1 and incrementing by 1. By default the CYCLE property is set and the minimum and maximum limits are the minimum and maximum limits of the type of returned values. There are self-explanatory options for changing various properties of the sequence. The MAXVALUE and MINVALUE specify the upper and lower limits. If CYCLE is specified, after the sequence returns the highest or lowest value in range, the next value will respectively be the lowest or highest value in range. If NO CYCLE is specified, the use of the sequence generator results in an error once the limit has been reached.

The integer types: SMALLINT, INTEGER, BIGINT, DECIMAL and NUMERIC can be used as the type of the sequence. DECIMAL and NUMERIC types must have a scale of 0 and a precision not exceeding 18.

ALTER SEQUENCE

alter sequence generator statement

```
<alter sequence generator statement> ::= ALTER SEQUENCE <sequence generator name> <alter sequence generator options>
```

```
<alter sequence generator options> ::= <alter sequence generator option>...
```

```
<alter sequence generator option> ::= <alter sequence generator restart option>
| <basic sequence generator option>
```

```
<alter sequence generator restart option> ::= RESTART [ WITH <sequence generator restart value> ]
```

```
<sequence generator restart value> ::= <signed numeric literal>
```

Change the definition of a named sequence generator. The same options that are used in the definition of the SEQUENCE can be used to alter it. The exception is the option for the start value which is RESTART WITH for the ALTER SEQUENCE statement.

If RESTART is used by itself (without a value), then the current value of the sequence is reset to the start value. Otherwise, the current value is reset to the given restart value.

DROP SEQUENCE

drop sequence generator statement

```
<drop sequence generator statement> ::= DROP SEQUENCE [ IF EXISTS ] <sequence generator name> [ IF EXISTS ] <drop behavior>
```

Destroy an external sequence generator. If the <drop behavior> is CASCADE, then all objects that reference the sequence are dropped. These objects can be VIEW, ROUTINE or TRIGGER objects.

SQL Procedure Statement

SQL procedure statement

SQL procedure statement

The definition of CREATE TRIGGER and CREATE PROCEDURE statements refers to <SQL procedure statement>. The definition of this element is given below. However, only a subset of these statements are allowed in trigger or routine definition.

```
<SQL procedure statement> ::= <SQL executable statement>
```

```
<SQL executable statement> ::= <SQL schema statement> | <SQL data statement>
| <SQL control statement> | <SQL transaction statement> | <SQL connection statement>
| <SQL session statement> | <SQL diagnostics statement> | <SQL dynamic statement>
```

```
<SQL schema statement> ::= <SQL schema definition statement> | <SQL schema manipulation statement>
```

```
<SQL schema definition statement> ::= <schema definition> | <table definition> |
<view definition> | <SQL-invoked routine> | <grant statement> | <role definition>
| <domain definition> | <character set definition> | <collation definition> |
<transliteration definition> | <assertion definition> | <trigger definition> |
<user-defined type definition> | <user-defined cast definition> | <user-defined ordering definition>
| <transform definition> | <sequence generator definition>
```

```
<SQL schema manipulation statement> ::= <drop schema statement> | <alter table statement>
| <drop table statement> | <drop view statement> | <alter routine statement>
| <drop routine statement> | <drop user-defined cast statement> |
<revoke statement> | <drop role statement> | <alter domain statement> | <drop domain statement>
| <drop character set statement> | <drop collation statement>
| <drop transliteration statement> | <drop assertion statement> | <drop trigger statement>
| <alter type statement> | <drop data type statement> | <alter sequence generator statement>
| <drop sequence generator statement>
```

Other Schema Object Creation

CREATE SYNONYM

create synonym statement

```
<create synonym statement> ::= CREATE SYNONYM <synonym name> FOR <target object name>
```

Creates a synonym for the <target object name>. The synonym is defined in the current schema, unless the name is qualified with a different schema name. The target object name can be a schema object in the current schema or in another schema. The synonym can be used only without the schema name.

DROP SYNONYM

drop synonym statement

```
<drop synonym statement> ::= DROP SYNONYM <synonym name>
```

Drops the synonym. The <synonym name> can be the simple name of the synonym or qualified with the schema name.

CREATE INDEX*create index statement*

```
<create index statement> ::= CREATE INDEX [ IF NOT EXISTS ] <index name> ON
<table name> <left paren> {<column name> [ASC | DESC]}, ... <right paren>
```

Creates an index on a group of columns of a table. The optional [ASC | DESC] specifies if the column is indexed in the ascending or descending order, but has no effect on how the index is created (it is allowed for compatibility with other database engines). HyperSQL can use all indexes in ascending or descending order as needed. Indexes should not duplicate the columns of PRIMARY KEY, UNIQUE or FOREIGN key constraints as each of these constraints creates an index automatically.

DROP INDEX*drop index statement*

```
<drop index statement> ::= DROP INDEX [ IF EXISTS ] <index name> [ IF EXISTS ]
```

Destroy an index.

ALTER INDEX*change the columns of an index*

```
<alter index statement> ::= ALTER INDEX <index name> <left paren> {<column
name>} , ... <right paren>
```

Redefine an index with a new column list. This statement is more efficient than dropping an existing index and creating a new one.

CREATE TYPE*user-defined type definition*

```
<user-defined type definition> ::= CREATE TYPE <user-defined type body>
```

```
<user-defined type body> ::= <schema-resolved user-defined type name> [ AS
<representation> ]
```

```
<representation> ::= <predefined type>
```

Define a user-defined type. Currently only simple distinct types can be defined without further attributes.

CREATE CAST*user-defined cast definition*

```
<user-defined cast definition> ::= CREATE CAST <left paren> <source data type>
AS <target data type> <right paren> WITH <cast function> [ AS ASSIGNMENT ]
```

```
<cast function> ::= <specific routine designator>
```

```
<source data type> ::= <data type>
```

```
<target data type> ::= <data type>
```

Define a user-defined cast. This feature may be supported in a future versions of HyperSQL.

DROP CAST

drop user-defined cast statement

```
<drop user-defined cast statement> ::= DROP CAST <left paren> <source data type>
AS <target data type> <right paren> <drop behavior>
```

Destroy a user-defined cast. This feature may be supported in a future versions of HyperSQL.

CREATE CHARACTER SET

character set definition

```
<character set definition> ::= CREATE CHARACTER SET <character set name> [ AS ]
<character set source> [ <collate clause> ]
```

```
<character set source> ::= GET <character set specification>
```

Define a character set. A new CHARACTER SET is based on an existing CHARACTER SET. The optional <collate clause> specifies the collation to be used, otherwise the collation is inherited from the default collation for the source CHARACTER SET. Currently this statement has no effect, as the character set used by HSQLDB is Unicode and there is no need for subset character sets.

DROP CHARACTER SET

drop character set statement

```
<drop character set statement> ::= DROP CHARACTER SET <character set name>
```

Destroy a character set. If the character set name is referenced in any database object, the command fails. Note that CASCADE or RESTRICT cannot be specified for this command.

CREATE COLLATION

collation definition

```
<collation definition> ::= CREATE COLLATION <collation name> FOR <character set
specification> FROM <existing collation name> [ <pad characteristic> ]
```

```
<existing collation name> ::= <collation name>
```

```
<pad characteristic> ::= NO PAD | PAD SPACE
```

Define a collation. A new collation is based on an existing COLLATION and applies to an existing CHARACTER SET. The <character set specification> is always SQL_TEXT. The <existing collation name> is either SQL_TEXT or one of the language collations supported by HSQLDB. The <pad characteristic> specifies whether strings are padded with spaces for comparison.

This statement is typically used when a collation is required that does not pad spaces before comparing two strings. For example, CREATE COLLATION FRENCH_NOPAD FOR INFORMATION_SCHEMA.SQL_TEXT FROM

"French" NO PAD, results in a French collation without padding. This collation can be used for sorting or for individual columns of tables.

DROP COLLATION

drop collation statement

```
<drop collation statement> ::= DROP COLLATION <collation name> <drop behavior>
```

Destroy a collation. If the <drop behavior> is CASCADE, then all references to the collation revert to the default collation that would be in force if the dropped collation was not specified.

CREATE TRANSLATION

transliteration definition

```
<transliteration definition> ::= CREATE TRANSLATION <transliteration name> FOR  
<source character set specification> TO <target character set specification>  
FROM <transliteration source>
```

```
<source character set specification> ::= <character set specification>
```

```
<target character set specification> ::= <character set specification>
```

```
<transliteration source> ::= <existing transliteration name> | <transliteration  
routine>
```

```
<existing transliteration name> ::= <transliteration name>
```

```
<transliteration routine> ::= <specific routine designator>
```

Define a character transliteration. This feature may be supported in a future versions of HyperSQL.

DROP TRANSLATION

drop transliteration statement

```
<drop transliteration statement> ::= DROP TRANSLATION <transliteration name>
```

Destroy a character transliteration. This feature may be supported in a future versions of HyperSQL.

CREATE ASSERTION

assertion definition

```
<assertion definition> ::= CREATE ASSERTION <constraint name> CHECK <left paren>  
<search condition> <right paren> [ <constraint characteristics> ]
```

Specify an integrity constraint. This feature may be supported in a future versions of HyperSQL.

DROP ASSERTION

drop assertion statement

```
<drop assertion statement> ::= DROP ASSERTION <constraint name> [ <drop  
behavior> ]
```

Destroy an assertion. This feature may be supported in a future versions of HyperSQL.

The Information Schema

The Information Schema is a special schema in each catalog. The SQL Standard defines a number of character sets and domains in this schema. In addition, all the implementation-defined collations belong to the Information Schema.

The SQL Standard defines many views in the Information Schema. These views show the properties of the database objects that currently exist in the database. When a user accesses one these views, only the properties of database objects that the user can access are included.

HyperSQL supports all the views defined by the Standard, apart from a few views that report on extended user-defined types and other optional features of the Standard that are not supported by HyperSQL.

HyperSQL also adds some views to the Information Schema. These views are for features that are not reported in any of the views defined by the Standard, or for use by JDBC DatabaseMetaData.

Predefined Character Sets, Collations and Domains

The SQL Standard defines a number of character sets and domains in the INFORMATION SCHEMA.

These domains are used in the INFORMATION SCHEMA views:

CARDINAL_NUMBER, YES_OR_NO, CHARACTER_DATA, SQL_IDENTIFIER, TIME_STAMP

All available collations are in the INFORMATION SCHEMA.

Views in INFORMATION SCHEMA

HyperSQL supports a vast range of views in the INFORMATION_SCHEMA. These include views specified by the SQL Standard, SQL/Schemata part, plus views that are specific to HyperSQL and are used for JDBC DatabaseMetaData queries, which are based on SQL/CLI part, or other information that is not covered by the SQL Standard. The names of views that are not part of SQL/Schemata start with SYSTEM_.

The views cover different types of information. These are covered in the next sections.

Visibility of Information

Users with the special ADMIN role can see the full information on all database objects. Ordinary, non-admin users can see information on the objects for which they have some privileges.

The rows returned to a non-admin user exclude objects on which the user has no privilege. The extent of the information in visible rows varies with the user's privilege. For example, the owner of a VIEW can see the text of the view query, but a user of the view cannot see this text. When a user cannot see the contents of some column, null is returned for that column.

Name Information

The names of database objects are stored in hierarchical views. The top level view is INFORMATION_SCHEMA_CATALOG_NAME.

Below this level, there is a group of views that covers authorizations and roles, without referencing schema objects. These are AUTHORIZATIONS and ADMINSTRABLE_ROLE_AUTHORIZATIONS.

Also below the top level, there is the SCHEMATA view, which lists the schemas in the catalog.

The views that refer to top-level schema objects are divided by object type. These includes ASSERTIONS, CHARACTER_SETS, COLLATIONS, DOMAINS, ROUTINES, SEQUENCES, TABLES, USER_DEFINED_TYPES and VIEWS.

There are views that refer to objects that are dependent on the top-level schema objects. These include COLUMNS and PARAMETERS, views for constraints, including CHECK_CONSTRAINTS, REFERENTIAL_CONSTRAINTS and TABLE_CONSTRAINTS, and finally the TRIGGERS view.

The usage of each type of top-level object by another is covered by several views. For example TRIGGER_SEQUENCE_USAGE or ROUTINE_TABLE_USAGE.

Several other views list the individual privileges owned or granted to each AUTHORIZATION. For example ROLE_ROUTINE_GRANTS or TABLE_PRIVILEGES.

Data Type Information

The INFORMATION_SCHEMA contains comprehensive information on the data types of each schema object and its elements. For example, the ROUTINES view includes the return data type for each FUNCTION definition. The columns for this information contain nulls for rows that cover PROCEDURE definitions.

The COLUMNS, PARAMETERS and SEQUENCES views contain the type information in columns with similar names.

The type information for ARRAY types is returned in the ELEMENT_TYPES view. When a row of the COLUMNS or other view indicates that the type of the object is an ARRAY type, then there is a corresponding entry for this row in the ELEMENT_TYPES view. The following columns in the ELEMENTS_TYPES view identify the database object whose data type is being described: OBJECT_CATALOG, OBJECT_SCHEMA, OBJECT_NAME, OBJECT_TYPE, COLLECTION_TYPE_IDENTIFIER. The last column's counterpart in the COLUMNS view is named differently as DTD_IDENTIFIER. So in order to determine the array element type of a column, an equi-join between the COLUMNS and ELEMENT_TYPES tables on the six listed columns in the ELEMENT_TYPES view and their counterparts in the COLUMNS view is needed.

Product Information

A group of views, including SQL_IMPLEMENTATION_INFO, SQL_FEATURES, SQL_SIZING and others cover the capabilities of HyperSQL in detail. These views hold static data and can be explored even when the database is empty.

Operations Information

There are some HyperSQL custom views cover the current state of operation of the database. These include SYSTEM_CACHEINFO, SYSTEM_SESSIONINFO and SYSTEM_SESSIONS views.

SQL Standard Views

The following views are defined by the SQL Standard and supported by HyperSQL. The columns and contents exactly match the Standard requirements.

ADMINISTRABLE_ROLE_AUTHORIZATIONS

Information on ROLE authorizations, all granted by the admin role.

APPLICABLE_ROLES

Information on ROLE authorizations for the current user

ASSERTIONS

Empty view as ASSERTION objects are not yet supported.

AUTHORIZATIONS

Top level information on USER and ROLE objects in the database

CHARACTER_SETS

List of supported CHARACTER SET objects

CHECK_CONSTRAINTS

Additional information specific to each CHECK constraint, including the search condition

CHECK_CONSTRAINT_ROUTINE_USAGE

Information on FUNCTION objects referenced in CHECK constraints search conditions

COLLATIONS

Information on collations supported by the database.

COLUMNS

Information on COLUMN objects in TABLE and VIEW definitions

COLUMN_COLUMN_USAGE

Information on references to COLUMN objects from other, GENERATED, COLUMN objects

COLUMN_DOMAIN_USAGE

Information on DOMAIN objects used in type definition of COLUMN objects

COLUMN_PRIVILEGES

Information on privileges on each COLUMN object, granted to different ROLE and USER authorizations

COLUMN_UDT_USAGE

Information on distinct TYPE objects used in type definition of COLUMN objects

CONSTRAINT_COLUMN_USAGE

Information on COLUMN objects referenced by CONSTRAINT objects in the database

CONSTRAINT_TABLE_USAGE

Information on TABLE and VIEW objects referenced by CONSTRAINT objects in the database

DATA_TYPE_PRIVILEGES

Information on top level schema objects of various kinds that reference TYPE objects

DOMAINS

Top level information on DOMAIN objects in the database.

DOMAIN_CONSTRAINTS

Information on CONSTRAINT definitions used for DOMAIN objects

ELEMENT_TYPES

Information on the type of elements of ARRAY used in database columns or routine parameters and return values

ENABLED_ROLES

Information on ROLE privileges enabled for the current session

INFORMATION_SCHEMA_CATALOG_NAME

Information on the single CATALOG object of the database

KEY_COLUMN_USAGE

Information on COLUMN objects of tables that are used by PRIMARY KEY, UNIQUE and FOREIGN KEY constraints

PARAMETERS

Information on parameters of each FUNCTION or PROCEDURE

REFERENTIAL_CONSTRAINTS

Additional information on FOREIGN KEY constraints, including triggered action and name of UNIQUE constraint they refer to

ROLE_AUTHORIZATION_DESCRIPTOR**ROLE_COLUMN_GRANTS**

Information on privileges on COLUMN objects granted to or by the current session roles

ROLE_ROUTINE_GRANTS

Information on privileges on FUNCTION and PROCEDURE objects granted to or by the current session roles

ROLE_TABLE_GRANTS

Information on privileges on TABLE and VIEW objects granted to or by the current session roles

ROLE_UDT_GRANTS

Information on privileges on TYPE objects granted to or by the current session roles

ROLE_USAGE_GRANTS

Information on privileges on USAGE privileges granted to or by the current session roles

ROUTINE_COLUMN_USAGE

Information on COLUMN objects of different tables that are referenced in FUNCTION and PROCEDURE definitions

ROUTINE_JAR_USAGE

Information on JAR usage by Java language FUNCTION and PROCEDURE objects.

ROUTINE_PRIVILEGES

Information on EXECUTE privileges granted on PROCEDURE and FUNCTION objects

ROUTINE_ROUTINE_USAGE

Information on PROCEDURE and FUNCTION objects that are referenced in FUNCTION and PROCEDURE definitions

ROUTINE_SEQUENCE_USAGE

Information on SEQUENCE objects that are referenced in FUNCTION and PROCEDURE definitions

ROUTINE_TABLE_USAGE

Information on TABLE and VIEW objects that are referenced in FUNCTION and PROCEDURE definitions

ROUTINES

Top level information on all PROCEDURE and FUNCTION objects in the database

SCHEMATA

Information on all the SCHEMA objects in the database

SEQUENCES

Information on SEQUENCE objects

SQL_FEATURES

List of all SQL:2008 standard features, including information on whether they are supported or not supported by HyperSQL

SQL_IMPLEMENTATION_INFO

Information on name, capabilities and defaults of the database engine software.

SQL_PACKAGES

List of the SQL:2008 Standard packages, including information on whether they are supported or not supported by HyperSQL

SQL_PARTS

List of the SQL:2008 Standard parts, including information on whether they are supported or not supported by HyperSQL

SQL_SIZING

List of the SQL:2008 Standard maximum supported sizes for different features as supported by HyperSQL

SQL_SIZING_PROFILES**TABLES**

Information on all TABLE and VIEW object, including the INFORMATION_SCHEMA views themselves

TABLE_CONSTRAINTS

Information on all table level constraints, including PRIMARY KEY, UNIQUE, FOREIGN KEY and CHECK constraints

TABLE_PRIVILEGES

Information on privileges on TABLE and VIEW objects owned or given to the current user

TRANSLATIONS**TRIGGERED_UPDATE_COLUMNS**

Information on columns that have been used in TRIGGER definitions in the ON UPDATE clause

TRIGGERS

Top level information on the TRIGGER definitions in the databases

TRIGGER_COLUMN_USAGE

Information on COLUMN objects that have been referenced in the body of TRIGGER definitions

TRIGGER_ROUTINE_USAGE

Information on FUNCTION and PROCEDURE objects that have been used in TRIGGER definitions

TRIGGER_SEQUENCE_USAGE

Information on SEQUENCE objects that been referenced in TRIGGER definitions

TRIGGER_TABLE_USAGE

Information on TABLE and VIEW objects that have been referenced in TRIGGER definitions

USAGE_PRIVILEGES

Information on USAGE privileges granted to or owned by the current user

USER_DEFINED_TYPES

Top level information on TYPE objects in the database

VIEWS

Top Level information on VIEW objects in the database

VIEW_COLUMN_USAGE

Information on COLUMN objects referenced in the query expressions of the VIEW objects

VIEW_ROUTINE_USAGE

Information on FUNCTION and PROCEDURE objects that have been used in the query expressions of the VIEW objects

VIEW_TABLE_USAGE

Information on TABLE and VIEW objects that have been referenced in the query expressions of the VIEW objects

HyperSQL Custom Views

The following views are specific to HyperSQL. Most of these views are used directly by JDBC DatabaseMetaData method calls and are indicated as such. Some views contain information that is specific to HyperSQL and is not covered by the SQL Standard views.

SYSTEM_BESTROWIDENTIFIER

For DatabaseMetaData.getBestRowIdentifier

SYSTEM_CACHEINFO

Contains the current settings and variables of the data cache used for all CACHED tables, and the data cache of each TEXT table.

SYSTEM_COLUMN_SEQUENCE_USAGE

Contains a row for each column that is defined as GENERATED BY DEFAULT AS SEQUENCE with the column name and sequence name

SYSTEM_COLUMNS

For DatabaseMetaData.getColumns, contains a row for each column

SYSTEM_COMMENTS

Contains the user-defined comments added to tables and their columns.

SYSTEM_CONNECTION_PROPERTIES

For DatabaseMetaData.getClientInfoProperties

SYSTEM_CROSSREFERENCE

Full list of all columns referenced by FOREIGN KEY constraints. For DatabaseMetaData.getCrossReference, getExportedKeys and getImportedKeys.

SYSTEM_INDEXINFO

For DatabaseMetaData.getIndexInfo

SYSTEM_PRIMARYKEYS

For DatabaseMetaData.getPrimaryKeys

SYSTEM_PROCEDURECOLUMNS

For DatabaseMetaData.getProcedureColumns

SYSTEM_PROCEDURES

For DatabaseMetaData.getFunctionColumns, getFunctions and getProcedures

SYSTEM_PROPERTIES

Contains the current values of all the database level properties. Settings such as SQL rule enforcement, database transaction model and default transaction level are all reported in this view. The names of the properties are listed in the Properties chapter together with the corresponding SQL statements used to change the properties.

SYSTEM_SCHEMAS

For DatabaseMetaData.getSchemas

SYSTEM_SEQUENCES**SYSTEM_SESSIONINFO**

Information on the settings and properties of the current session.

SYSTEM_SESSIONS

Information on all open sessions in the database (when used by a DBA user), or just the current session. Includes the current transaction state of each session.

SYSTEM_TABLES

Information on tables and views for DatabaseMetaData.getTables

SYSTEM_TABLESTATS

Information on table spaces and cardinality for each table

SYSTEM_TABLETYPES

For DatabaseMetaData.getTableTypes

SYSTEM_TEXTTABLES

Information on the settings of each text table.

SYSTEM_TYPEINFO

For DatabaseMetaData.getTypeInfo

SYSTEM_UDTS

For DatabaseMetaData.getUDTs

SYSTEM_USERS

Contains the list of all users in the database (when used by a DBA user), or just the current user.

SYSTEM_VERSIONCOLUMNS

For DatabaseMetaData.getVersionColumns

Chapter 5. Text Tables

Text Tables as a Standard Feature of HsqlDb

Bob Preston, The HSQL Development Group

Fred Toussi, The HSQL Development Group

\$Revision: 5633 \$

Copyright 2002-2016 Bob Preston and Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

Text Table support for HSQLDB was originally developed by Bob Preston independently from the Project. Subsequently Bob joined the Project and incorporated this feature into version 1.7.0, with a number of enhancements, especially the use of SQL commands for specifying the files used for Text Tables.

In a nutshell, Text Tables are CSV or other delimited files treated as SQL tables. Any ordinary CSV or other delimited file can be used. The full range of SQL queries can be performed on these files, including SELECT, INSERT, UPDATE and DELETE. Indexes and unique constraints can be set up, and foreign key constraints can be used to enforce referential integrity between Text Tables themselves or with conventional tables.

The delimited file can be created by the engine, or an existing file can be used.

HyperSQL with Text Table support is the only comprehensive solution that employs the power of SQL and the universal reach of JDBC to handle data stored in text files.

The Implementation

Definition of Tables

Text Tables are defined similarly to conventional tables with the added TEXT keyword.

```
CREATE TEXT TABLE <tablename> (<column definition> [<constraint definition>])
```

The table is at first empty and cannot be written to. An additional SET command specifies the file and the separator character that the Text table uses. It assigns the file to the table.

```
SET TABLE <tablename> SOURCE <quoted_filename_and_options> [DESC]
```

Scope and Reassignment

- A Text table without a file assigned to it is READ ONLY and EMPTY.
- Reassigning a Text Table definition to a new file has implications in the following areas:
 1. The user is required to be an administrator.

2. Existing transactions are committed at this point.
3. Constraints, including foreign keys referencing this table, are kept intact but not checked. It is the responsibility of the administrator to ensure their integrity.

The new source file is scanned and indexes are built when it is assigned to the table. At this point any violation of NOT NULL, UNIQUE or PRIMARY KEY constraints are caught and the assignment is aborted. However, foreign key constraints are not checked at the time of assignment or reassignment of the source file.

Null Values in Columns of Text Tables

- Empty fields are treated as NULL. These are fields where there is nothing or just spaces between the separators.
- Quoted empty strings are treated as empty strings.

Configuration

The default field separator is a comma (.). A different field separator can be specified within the SET TABLE SOURCE statement. For example, to change the field separator for the table mytable to a vertical bar, place the following in the SET TABLE SOURCE statement, for example:

```
SET TABLE mytable SOURCE "myfile;fs=|"
```

Since HSQLDB treats CHAR and VARCHAR strings the same, the ability to assign a different separator to the latter is provided. When a different separator is assigned to a VARCHAR, it will terminate any CSV field of that type. For example, if the first field is CHAR, and the second field VARCHAR, and the separator fs has been defined as the pipe (|) and vs as the period (.) then the data in the CSV file for a row will look like:

```
First field data|Second field data.Third field data
```

This facility in effect offers an extra, special separator which can be used in addition to the global separator. The following example shows how to change the default separator to the pipe (|), VARCHAR separator to the period (.) within a SET TABLE SOURCE statement:

```
SET TABLE mytable SOURCE "myfile;fs=|;vs=."
```

HSQLDB also recognises the following special indicators for separators:

special indicators for separators

\semi	semicolon
\quote	single-quote
\space	space character
\apos	apostrophe
\n	newline - Used as an end anchor (like \$ in regular expressions)
\r	carriage return
\t	tab
\\	backslash

`\u####` a Unicode character specified in hexadecimal

Furthermore, HSQLDB provides csv file support with three additional boolean options: `ignore_first`, `quoted` and `all_quoted`. The `ignore_first` option (default false) tells HSQLDB to ignore the first line in a file. This option is used when the first line of the file contains column headings or other title information. The first line consists of the characters before the first end-of-line symbol (line feed, carriage return, etc). It is simply set aside and not processed. The `all_quoted` option (default false) tells the program that it should use quotes around all character fields when writing to the source file. The `quoted` option (default true) uses quotes only when necessary to distinguish a field that contains the separator character. It can be set to false to prevent the use of quoting altogether and treat quote characters as normal characters. All these options may be specified within the `SET TABLE SOURCE` statement:

```
SET TABLE mytable SOURCE "myfile;ignore_first=true;all_quoted=true"
```

When the default options `all_quoted=false` and `quoted=true` are in force, fields that are written to a line of the csv file will be quoted only if they contain the separator or the quote character. The quote character inside the field is doubled when written out to the file. When `all_quoted=false` and `quoted=false` the quote character is not doubled. With this option, it is not possible to insert any string containing the separator into the table, as it would become impossible to distinguish from a separator. While reading an existing data source file, the program treats each individual field separately. It determines that a field is quoted only if the first character is the quote character. It interprets the rest of the field on this basis.

The character encoding for the source file is `ASCII` by default, which corresponds to the 8-bit ANSI character set. To support UNICODE or source files prepared with different encodings this can be changed to `UTF-8` or any other encoding. The default is `encoding=ASCII` and the option `encoding=UTF-8` or other supported encodings can be used. From version 2.3.4, the two-byte-per-character encodings of `UTF-16` are also supported. The `encoding=UTF-16BE` is big-endian, while `encoding=UTF-16LE` is little-endian. The `encoding=UTF-16` is big-endian by default. This encoding reads a special Unicode character called BOM if it is present at the beginning of an existing file and if this character indicates little-endian, the file is treated as such. Note HSQLDB does not write a BOM character to the files it creates from scratch.

Finally, HSQLDB provides the ability to read a text file as `READ ONLY`, by placing the keyword `"DESC"` at the end of the `SET TABLE SOURCE` statement:

```
SET TABLE mytable SOURCE "myfile" DESC
```

Text table source files are cached in memory. The maximum number of rows of data that are in memory at any time is controlled by the `cache_rows` property. The default value for `cache_rows` is 1000 and can be changed by setting the default database property. The `cache_size` property sets the maximum amount of memory used for each text table. The default is 100 KB. The properties can be set for individual text tables. These properties do not control the maximum size of each text table, which can be much larger. An example is given below:

```
SET TABLE mytable SOURCE
"myfile;ignore_first=true;all_quoted=true;cache_rows=10000;cache_size=1000"
```

The properties used in earlier versions, namely the `textdb.cache_scale` and the `textdb.cache_size_scale` can still be used for backward compatibility, but the new properties are preferred.

Supported Properties

<code>quoted = { true false }</code>	default is true. If false, treats double quotes as normal characters
<code>all_quoted = { true false }</code>	default is false. If true, adds double quotes around all fields.
<code>encoding = <encoding name></code>	character encoding for text and character fields, for example, <code>encoding=UTF-8</code> . <code>UTF-16</code> cannot be used.
<code>ignore_first = { true false }</code>	default is false. If true ignores the first line of the file

<code>cache_rows= <numeric value></code>	rows of the text file in the cache. Default is 1000 rows
<code>cache_size = <numeric value>r</code>	total size of the rows in the cache. Default is 100 KB.
<code>cache_scale= <numeric value></code> and <code>cache_size_scale = <numeric value></code>	deprecated properties, replaced by <code>cached_rows</code> and <code>cache_size</code> properties above.
<code>fs = <unquoted character></code>	field separator
<code>vs = <unquoted character></code>	varchar separator
<code>qc = <unquoted character></code>	quote character

Disconnecting Text Tables

Text tables may be *disconnected* from their underlying data source, i.e. the text file.

You can explicitly disconnect a text table from its file by issuing the following statement:

```
SET TABLE mytable SOURCE OFF
```

Subsequently, `mytable` will be empty and read-only. However, the data source description will be preserved, and the table can be re-connected to it with

```
SET TABLE mytable SOURCE ON
```

When a database is opened, if the source file for an existing text table is missing, the table remains disconnected from its data source but the source description is preserved. This allows the missing source file to be added to the directory and the table re-connected to it with the above command.

Disconnecting text tables from their source has several uses. While disconnected, the text source can be edited outside HSQLDB, provided data integrity is respected. When large text sources are used, and several constraints or indexes need to be created on the table, it is possible to disconnect the source during the creation of constraints and indexes and reduce the time it takes to perform the operation.

Text File Usage

The following information applies to the usage of text tables.

Text File Issues

- With file databases, text file locations are restricted to below the directory that contains the database, unless the `textdb.allow_full_path` property is set `true` as a Java system property. This feature is for security, otherwise an admin database user may be able to open random files. The specified text source path is interpreted differently according to this property. By default, the path is interpreted as a relative path to the directory path of database files, it therefore cannot contain the double dot notation for parent directory. This path is then appended by the engine to the directory path to form a full path.

When the property is `true`, and the path starts with the forward slash or back slash, or the path contains a semicolon, the path is not appended to the directory path and is used as it is to open the file. In this usage the path is absolute.

- By default, all-in-memory databases cannot use text tables. To enable this capability the `textdb.allow_full_path` property must be set `true` as a Java system property. The text file path is used as submitted and interpreted as an absolute path as described above, or a path relative to the Java process execute path. These text tables are always read-only.

- Databases store in jars or as files on the classpath and opened with the `res:` protocol can reference read-only text files. These files are opened as resources. The file path is an absolute path beginning with a forward slash.
- Blank lines are allowed anywhere in the text file, and are ignored.
- It is possible to define a primary key, identity column, unique, foreign key and check constraints for text tables.
- When a table source file is used with the `ignore_first=true` option, the first, ignored line is replaced with a blank line after a SHUTDOWN COMPACT, unless the SOURCE HEADER statement has been used.
- An existing table source file may include CHARACTER fields that do not begin with the quote character but contain instances of the quote character. These fields are read as literal strings. Alternatively, if any field begins with the quote character, then it is interpreted as a quoted string that should end with the quote character and any instances of the quote character within the string is doubled. When any field containing the quote character or the separator is written out to the source file by the program, the field is enclosed in quote character and any instance of the quote character inside the field is doubled.
- Inserts or updates of CHARACTER type field values are allowed with strings that contains the linefeed or the carriage return character. This feature is disabled when both `quoted` and `all_quoted` properties are false.
- ALTER TABLE commands that add or drop columns or constraints (apart from check constraints) are not supported with text tables that are connected to a source. First use the SET TABLE <name> SOURCE OFF, make the changes, then turn the source ON.
- Use the default setting (`quoted=true`) for selective quoting of fields. Those fields that need quoting are quoted, other not.
- Use the `quoted=false` setting to avoid quoting of fields completely. With this setting any quote character is considered part of the text.
- Use the `all_quoted=true` setting to force all fields to be quoted.
- You can choose the quote character. The default is the double-quote character.
- SHUTDOWN COMPACT results in a complete rewrite of text table sources that are open at the time. The settings for `quoted` and `all_quoted` are applied for the rewrite.

Text File Global Properties

The database engine uses a set of defaults for text table properties. Each table's data source may override these defaults. It is also possible to override the defaults globally, so they apply to all text tables. The statement SET DATABASE TEXT TABLE DEFAULTS <properties string> can be used to override the default global properties. An example is given below:

```
SET DATABASE TEXT TABLE DEFAULTS
'all_quoted=true;encoding=UTF-8;cache_rows=10000;cache_size=2000'
```

List of supported global properties

- `qc=` "
- `fs=` ,
- `vs=` ,
- `quoted=true`

- `all_quoted=false`
- `ignore_first=false`
- `encoding=ASCII`
- `cache_rows=1000`
- `cache_size=100`
- `textdb.allow_full_path=false` (a system property)

Transactions

Text tables fully support transactions. New or changed rows that have not been committed are not updated in the source file. Therefore the source file always contains committed rows.

However, text tables are not as resilient to machine crashes as other types of tables. If the crash happens while the text source is being written to, the text source may contain only some of the changes made during a committed transaction. With other types of tables, additional mechanisms ensure the integrity of the data and this situation will not arise.

Chapter 6. Access Control

Fred Toussi, The HSQL Development Group

\$Revision: 3096 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

This chapter is about access control to database objects such as tables, inside the database engine. Other issues related to security include user authentication, password complexity and secure connections are covered in the System Management chapter and the HyperSQL Network Listeners (Servers) chapter.

Apart from schemas and their object, each HyperSQL catalog has USER and ROLE objects. These objects are collectively called *authorizations*. Each AUTHORIZATION has some access rights on some of the schemas or the objects they contain. The persistent elements of an SQL environment are database objects

Authorizations names are stored in the database in the case-normal form. When connecting to a database via JDBC, the user name and password must match the case of this case-normal form.

When a user is created with the CREATE USER statement, if the user name is enclosed in double quotes, the exact name is used as the case-normal form. But if it is not enclosed in double quotes, the name is converted to uppercase and this uppercase version is stored in the database as the case-normal form.

Authorizations and Access Control

In general, ROLE and USER objects simply control access to schema objects. This is the scope of the SQL Standard. However, there are special roles that allow the creation of USER and ROLE objects and also allow some special operations on the database as a whole. These roles are not defined by the Standard, which has left it to implementers to define such roles as they are needed for the particular SQL implementation.

A ROLE has a name a collection of zero or more other roles, plus some privileges (access rights). A USER has a name and a password. It similarly has a collection of zero or more roles plus some privileges.

USER objects existed in the SQL-92, but ROLE objects were introduced in SQL:1999. Originally it was intended that USER objects would normally be the same as the operating system USER objects and their authentication would be handled outside the SQL environment. The co-existence of ROLE and USER objects results in complexity. With the addition of ROLE objects, there is no rationale, other than legacy support, for granting privileges to USER objects directly. It is better to create roles and grant privileges to them, then grant the roles to USER objects.

The Standard effectively defines a special ROLE, named PUBLIC. All authorization have the PUBLIC role, which cannot be removed from them. Therefore any access right assigned to the PUBLIC role applies to all authorizations in the database. For many simple databases, it is adequate to create a single, non-admin user, then assign access rights to the pre-existing PUBLIC role. Access to INFORMATION_SCHEMA views is granted to PUBLIC, therefore these views are accessible to all. However, the contents of each view depends on the ROLE or USER (AUTHORIZATION) that is in force while accessing the view.

Each schema has a single AUTHORIZATION. This is commonly known as the *owner* of the schema. All the objects in the schema inherit the schema owner. The schema owner can add objects to the schema, drop them or alter them.

By default, the objects in a schema can only be accessed by the schema owner. The schema owner can grant access rights on the objects to other users or roles.

authorization identifier

authorization identifier

```
<authorization identifier> ::= <role name> | <user name>
```

Authorization identifiers share the same name-space within the database. The same name cannot be used for a USER and a ROLE.

Built-In Roles and Users

There are some pre-defined roles in each database; some defined by the SQL Standard, some by HyperSQL. These roles can be assigned to users (directly or via other, user-defined roles). In addition, there is the initial SYS user created with each new database. The initial user name and password is defined in the connection properties when the first connection to the database is made. In older versions of HSQLDB, this name was always SA. But in the latest version, the name can be defined as a different string.

PUBLIC

the PUBLIC role

The role that is assigned to all authorizations (roles and users) in the database. This role has access rights to all objects in the INFORMATION_SCHEMA. Any roles or rights granted to this role, are in effect granted to all users of the database.

_SYSTEM

the _SYSTEM role

This role is the authorization for the pre-defined (system) objects in the database, including the INFORMATION_SCHEMA. This role cannot be assigned to any authorization.

DBA

the DBA role (HyperSQL-specific)

This is a special role in HyperSQL. A user that has this role can perform all possible administrative tasks on the database. The DBA role can also act as a proxy for all the roles and users in the database. This means it can do everything the authorization for a schema can do, including dropping the schema or its objects, or granting rights on the schema objects to a grantee.

CREATE_SCHEMA

the CREATE_SCHEMA role (HyperSQL-specific)

An authorization that has this role, can create schemas. The DBA authorization has this role and can grant it to other authorizations.

CHANGE_AUTHORIZATION

the CHANGE_AUTHORIZATION role (HyperSQL-specific)

A user that has this role, can change the authorization for the current session to another user. The other user cannot have the DBA role (otherwise, the original user would gain DBA privileges). The DBA authorization has this role and can grant it to other authorizations.

SYS User

the SYS user (HyperSQL-specific)

This user is automatically created with a new database and has the DBA role. This user name and its password are defined in the connection properties when connecting to the new database to create the database. As this user, it is possible to change the password, create other users and created new schema objects. The initial SYS user can be dropped by another user that has the DBA role. As a result, there is always at least one SYS user in the database.

Listing Users and Roles

Tables in the INFORMATION_SCHEMA contain the list of users and roles for the database.

The SYSTEM_USERS tables contains the list of users, with some extra settings for each user. The AUTHORIZATIONS table contains a list of both users and roles.

Several other INFORMATION_SCHEMA tables list the privileges granted to users and roles on different database objects. Refer to the Schemas and Database Objects chapter for a list and description of the tables. Example below:

```
SELECT * FROM INFORMATION_SCHEMA.SYSTEM_USERS
SELECT * FROM INFORMATION_SCHEMA.TABLE_PRIVILEGES
```

Access Rights

By default, the objects in a schema can only be accessed by the schema owner. But the schema owner can grant privileges (access rights) on the objects to other users or roles.

Things can get far more complex, because the grant of privileges can be made WITH GRANT OPTION. In this case, the role or user that has been granted the privilege can grant the privilege to other roles and users.

Privileges can also be revoked from users or roles.

The statements for granting and revoking privileges normally specify which privileges are granted or revoked. However, there is a shortcut, ALL PRIVILEGES, which means all the privileges that the <grantor> has on the schema object. The <grantor> is normally the CURRENT_USER of the session that issues the statement.

The user or role that is granted privileges is referred to as <grantee> for the granted privileges.

Table

For tables, including views, privileges can be granted with different degrees of granularity. It is possible to grant a privilege on all columns of a table, or on specific columns of the table.

The DELETE privilege applies to the table, rather than its columns. It applies to all DELETE statements.

The SELECT, INSERT and UPDATE privileges may apply to all columns or to individual columns. These privileges determine whether the <grantee> can execute SQL data statements on the table.

The SELECT privilege designates the columns that can be referenced in SELECT statements, as well as the columns that are read in a DELETE or UPDATE statement, including the search condition.

The INSERT privilege designates the columns into which explicit values can be inserted. To be able to insert a row into the table, the user must therefore have the INSERT privilege on the table, or at least all the columns that do not have a default value.

The UPDATE privilege simply designates the table or the specific columns that can be updated.

The REFERENCES privilege allows the <grantee> to define a FOREIGN KEY constraint on a different table, which references the table or the specific columns designated for the REFERENCES privilege.

The TRIGGER privilege allows adding a trigger to the table.

Sequence, Type, Domain, Character Set, Collation, Transliteration,

For these objects, only USAGE can be granted. The USAGE privilege is needed when object is referenced directly in an SQL statement.

Routine

For routines, including procedures or functions, only EXECUTE privilege can be granted. This privilege is needed when the routine is used directly in an SQL statement.

Other Objects

Other objects such as constraints and assertions are not used directly and there is no grantable privilege that refers to them.

Statements for Authorization and Access Control

The statements listed below allow creation and destruction of USER and ROLE objects. The GRANT and REVOKE statements allow roles to be assigned to other roles or to users. The same statements are also used in a different form to assign privileges on schema objects to users and roles.

CREATE USER

user definition (HyperSQL)

```
<user definition> ::= CREATE USER <user name> PASSWORD <password> [ ADMIN ]
```

Define a new user and its password. <user name> is an SQL identifier. If it is double-quoted it is case-sensitive, otherwise it is turned to uppercase. <password> is a string enclosed with single quote characters and is case-sensitive. If ADMIN is specified, the DBA role is granted to the new user. Only a user with the DBA role can execute this statement.

DROP USER

drop user statement (HyperSQL)

```
<drop user statement> ::= DROP USER <user name>
```

Drop (destroy) an existing user. If the specified user is the authorization for a schema, the schema is destroyed.

Only a user with the DBA role can execute this statement.

ALTER USER ... SET PASSWORD

set the password for a user (HyperSQL)

```
<alter user set password statement> ::= ALTER USER <user name> SET PASSWORD <password>
```

Change the password of an existing user. <user name> is an SQL identifier. If it is double-quoted it is case-sensitive, otherwise it is turned to uppercase. <password> is a string enclosed with single quote characters and is case-sensitive.

Only a user with the DBA role can execute this command.

ALTER USER ... SET INITIAL SCHEMA

set the initial schema for a user (HyperSQL)

```
<alter user set initial schema statement> ::= ALTER USER <user name> SET INITIAL SCHEMA <schema name> | DEFAULT
```

Change the initial schema for a user. The initial schema is the schema used by default for SQL statements issued during a session. If `DEFAULT` is used, the default initial schema for all users is used as the initial schema for the user. The `SET SCHEMA` command allows the user to change the schema for the duration of the session.

Only a user with the DBA role can execute this statement.

ALTER USER ... SET LOCAL

set the user authentication as local (HyperSQL)

```
<alter user set local> ::= ALTER USER <user name> SET LOCAL { TRUE | FALSE }
```

Sets the authentication method for the user as local. This statement has an effect only when external authentication with role names is enabled. In this method of authentication, users created in the database are ignored and an external authentication mechanism, such as LDAP is used. This statement is used if you want to use local, password authentication for a specific user.

Only a user with the DBA role can execute this statement.

SET PASSWORD

set password statement (HyperSQL)

```
<set password statement> ::= SET PASSWORD <password>
```

Set the password for the current user. `<password>` is a string enclosed with single quote characters and is case-sensitive.

SET INITIAL SCHEMA

set the initial schema for the current user (HyperSQL)

```
<set initial schema statement> ::= SET INITIAL SCHEMA <schema name> | DEFAULT
```

Change the initial schema for the current user. The initial schema is the schema used by default for SQL statements issued during a session. If `DEFAULT` is used, the default initial schema for all users is used as the initial schema for the current user. The separate `SET SCHEMA` command allows the user to change the schema for the duration of the session. See also the [Sessions and Transactions](#) chapter.

SET DATABASE DEFAULT INITIAL SCHEMA

set the default initial schema for all users (HyperSQL)

```
<set database default initial schema statement> ::= SET DATABASE DEFAULT INITIAL SCHEMA <schema name>
```

Sets the initial schema for new users. This schema can later be changed with the `<set initial schema statement>` command.

CREATE ROLE*role definition*

```
<role definition> ::= CREATE ROLE <role name> [ WITH ADMIN <grantor> ]
```

Defines a new role. Initially the role has no rights, except those of the PUBLIC role. Only a user with the DBA role can execute this command.

DROP ROLE*drop role statement*

```
<drop role statement> ::= DROP ROLE <role name>
```

Drop (destroy) a role. If the specified role is the authorization for a schema, the schema is destroyed. Only a user with the DBA role can execute this statement.

GRANTED BY*grantor determination*

```
GRANTED BY <grantor>
```

```
<grantor> ::= CURRENT_USER | CURRENT_ROLE
```

The authorization that is granting or revoking a role or privileges. The optional GRANTED BY <grantor> clause can be used in various statements that perform GRANT or REVOKE actions. If the clause is not used, the authorization is CURRENT_USER. Otherwise, it is the specified authorization.

GRANT*grant privilege statement*

```
<grant privilege statement> ::= GRANT <privileges> TO <grantee> [ { <comma> <grantee> }... ] [ WITH GRANT OPTION ] [ GRANTED BY <grantor> ]
```

Assign privileges on schema objects to roles or users. Each <grantee> is a role or a user. If [WITH GRANT OPTION] is specified, then the <grantee> can assign the privileges to other <grantee> objects.

```
<privileges> ::= <object privileges> ON <object name>
```

```
<object name> ::= [ TABLE ] <table name> | DOMAIN <domain name> |
COLLATION <collation name> | CHARACTER SET <character set name> | TRANSLATION
<transliteration name> | TYPE <user-defined type name> | SEQUENCE <sequence
generator name> | <specific routine designator> | ROUTINE <routine name> |
FUNCTION <function name> | PROCEDURE <procedure name>
```

```
<object privileges> ::= ALL PRIVILEGES | <action> [ { <comma> <action> }... ]
```

```
<action> ::= SELECT | SELECT <left paren> <privilege column list> <right paren>
| DELETE | INSERT [ <left paren> <privilege column list> <right paren> ] | UPDATE
[ <left paren> <privilege column list> <right paren> ] | REFERENCES [ <left
paren> <privilege column list> <right paren> ] | USAGE | TRIGGER | EXECUTE
```

```
<privilege column list> ::= <column name list>
```

```
<grantee> ::= PUBLIC | <authorization identifier>
```

The `<object privileges>` that can be used depend on the type of the `<object name>`. These are discussed in the previous section. For a table, if `<privilege column list>` is not specified, then the privilege is granted on the table, which includes all of its columns and any column that may be added to it in the future. For routines, the name of the routine can be specified in two ways, either as the generic name as the specific name. HyperSQL allows referencing all overloaded versions of a routine at the same time, using its name. This differs from the SQL Standard which requires the use of `<specific routine designator>` to grant privileges separately on each different signature of the routine.

Each `<grantee>` is the name of a role or a user. Examples of GRANT statement are given below:

```
GRANT ALL ON SEQUENCE aSequence TO roleOrUser
GRANT SELECT ON aTable TO roleOrUser
GRANT SELECT, UPDATE ON aTABLE TO roleOrUser1, roleOrUser2
GRANT SELECT(columnA, columnB), UPDATE(columnA, columnB) ON TABLE aTable TO roleOrUser
GRANT EXECUTE ON SPECIFIC ROUTINE aroutine_1234 TO rolOrUser
```

As mentioned in the general discussion, it is better to define a role for the collection of all the privileges required by an application. This role is then granted to any user. If further changes are made to the privileges of this role, they are automatically reflected in all the users that have the role.

GRANT

grant role statement

```
<grant role statement> ::= GRANT <role name> [ { <comma> <role name> }... ]
TO <grantee> [ { <comma> <grantee> }... ] [ WITH ADMIN OPTION ] [ GRANTED BY
<grantor> ]
```

Assign roles to roles or users. One or more roles can be assigned to one or more `<grantee>` objects. A `<grantee>` is a user or a role. If the `[WITH ADMIN OPTION]` is specified, then each `<grantee>` can grant the newly assigned roles to other grantees. An example of user and role creation with grants is given below:

```
CREATE USER appuser
CREATE ROLE approle
GRANT approle TO appuser
GRANT SELECT, UPDATE ON TABLE atable TO approle
GRANT USAGE ON SEQUENCE asequence to approle
GRANT EXECUTE ON ROUTINE aroutine TO approle
```

REVOKE privilege

revoke statement

```
<revoke privilege statement> ::= REVOKE [ GRANT OPTION FOR ] <privileges> FROM
<grantee> [ { <comma> <grantee> }... ] [ GRANTED BY <grantor> ] RESTRICT | CASCADE
```

Revoke privileges from a user or role.

REVOKE role

revoke role statement

```
<revoke role statement> ::= REVOKE [ ADMIN OPTION FOR ] <role revoked> [ { <comma>
<role revoked> }... ] FROM <grantee> [ { <comma> <grantee> }... ] [ GRANTED
BY <grantor> ] RESTRICT | CASCADE
```

```
<role revoked> ::= <role name>
```

Revoke a role from users or roles.

Chapter 7. Data Access and Change

Fred Toussi, The HSQL Development Group

\$Revision: 5630 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.
2016-05-15 15:57:21-0400

Overview

HyperSQL data access and data change statements are fully compatible with the latest SQL:2011 Standard. There are a few extensions and some relaxation of rules, but these do not affect statements that are written to the Standard syntax. There is full support for classic SQL, as specified by SQL-92, and many enhancements added in later versions of the standard.

Cursors And Result Sets

An SQL statement can be executed in two ways. One way is to use the `java.sql.Statement` interface. The `Statement` object can be reused to execute completely different SQL statements. Alternatively a `PreparedStatement` can be used to execute an SQL statement repeatedly, and the statements can use parameters. Using either form, if the SQL statement is a query expression, a `ResultSet` is returned.

In SQL, when a query expression (`SELECT` or similar SQL statement) is executed, an ephemeral table is created. When this table is returned to the application program, it is returned as a result set, which is accessed row-by-row by a cursor. A JDBC `ResultSet` represents an SQL result set and its cursor.

The minimal definition of a cursor is a list of rows with a position that can move forward. Some cursors also allow the position to move backwards or jump to any position in the list.

An SQL cursor has several attributes. These attributes depend on the query expression. Some of these attributes can be overridden by specifying qualifiers in the SQL statement or by specifying values for the parameters of the JDBC `Statement` or `PreparedStatement`.

Columns and Rows

The columns of the result set are determined by the query expression. The number of columns and the type and name characteristics of each column are known when the query expression is compiled and before its execution. This metadata information remains constant regardless of changes to the contents of the tables used in the query expression. The metadata for the JDBC `ResultSet` is in the form of a `ResultSetMetaData` object. Various methods of the `ResultSetMetaData` interface return different properties of each column of the `ResultSet`.

A result set may contain 0 or more rows. The rows are determined by the execution of the query expression.

The `setMaxRows(int)` method of JDBC `Statement` allows limiting the number of rows returned by the statement. This limit is conceptually applied after the result has been built, and the excess rows are discarded.

Navigation

A cursor is either scrollable or not. Scrollable cursors allow accessing rows by absolute or relative positioning. No-scroll cursors only allow moving to the next row. The cursor can be optionally declared with the SQL qualifiers

SCROLL, or NO SCROLL. The JDBC statement parameter can be specified as: TYPE_FORWARD_ONLY and TYPE_SCROLL_INSENSITIVE. The JDBC type TYPE_SCROLL_SENSITIVE is not supported by HSQLDB.

The default is NO SCROLL or TYPE_FORWARD_ONLY.

When a JDBC `ResultSet` is opened, it is positioned before the first row. Using the `next()` method the position is moved to the first row. While the `ResultSet` is positioned on a row, various getter methods can be used to access the columns of the row.

Updatability

The result returned by some query expressions is updatable. HSQLDB supports core SQL updatability features, plus some enhancements from the SQL optional features.

A query expression is updatable if it is a `SELECT` from a single underlying base table (or updatable view) either directly or indirectly. A `SELECT` statement featuring `DISTINCT` or `GROUP BY` or `FETCH`, `LIMIT`, `OFFSET` is not updatable. In an updatable query expression, one or more columns are updatable. An updatable column is a column that can be traced directly to the underlying table. Therefore, columns that contain expressions are not updatable. Examples of updatable query expressions are given below. The view `V` is updatable when its query expression is updatable. The `SELECT` statement from this view is also updatable:

```
SELECT A, B FROM T WHERE C > 5
SELECT A, B FROM (SELECT * FROM T WHERE C > 10) AS TT WHERE TT.B <10
CREATE VIEW V(X,Y) AS SELECT A, B FROM T WHERE C > 0 AND B < 10
SELECT X FROM V WHERE Y = 5
```

If a cursor is declared with the SQL qualifier, `FOR UPDATE OF <column name list>`, then only the stated columns in the result set become updatable. If any of the stated columns is not actually updatable, then the cursor declaration will not succeed.

If the SQL qualifier, `FOR UPDATE` is used, then all the updatable columns of the result set become updatable.

If a cursor is declared with `FOR READ ONLY`, then it is not updatable.

In HSQLDB, if `FOR READ ONLY` or `FOR UPDATE` is not used then all the updatable columns of the result set become updatable. This relaxes the SQL standard rule that in this case limits updatability to only simply updatable `SELECT` statements (where all columns are updatable).

In JDBC, `CONCUR_READ_ONLY` or `CONCUR_UPDATABLE` can be specified for the `Statement` parameter. `CONCUR_UPDATABLE` is required if the returning `ResultSet` is to be updatable. If `CONCUR_READ_ONLY`, which is the default, is used, then even an updatable `ResultSet` becomes read-only.

When a `ResultSet` is updatable, various setter methods can be used to modify the column values. The names of the setter methods begin with "update". After all the updates on a row are done, the `updateRow()` method must be called to finalise the row update.

An updatable `ResultSet` may or may not be insertable-into. In an insertable `ResultSet`, all columns of the result are updatable and any column of the base table that is not in the result must be a generated column or have a default value.

In the `ResultSet` object, a special pseudo-row, called the insert row, is used to populate values for insertion into the `ResultSet` (and consequently, into the base table). The setter methods must be used on all the columns, followed by a call to `insertRow()`.

Individual rows from all updatable result sets can be deleted one at a time. The `deleteRow()` is called when the `ResultSet` is positioned on a row.

While using an updatable `ResultSet` to modify data, it is recommended not to change the same data using another `ResultSet` and not to execute SQL data change statements that modify the same data.

Sensitivity

The sensitivity of the cursor relates to visibility of changes made to the data by the same transaction but without using the given cursor. While the result set is open, the same transaction may use statements such as `INSERT` or `UPDATE`, and change the data of the tables from which the result set data is derived. A cursor is `SENSITIVE` if it reflects those changes. It is `INSENSITIVE` if it ignores such changes. It is `ASENSITIVE` if behaviour is implementation dependent.

The SQL default is `ASENSITIVE`, i.e., implementation dependent.

In `HSQldb` all cursors are `INSENSITIVE`. They do not reflect changes to the data made by other statements.

Holdability

A cursor is holdable if the result set is not automatically closed when the current transaction is committed. Holdability can be specified in the cursor declaration using the SQL qualifiers `WITH HOLD` or `WITHOUT HOLD`.

In `JDBC`, holdability is specified using either of the following values for the `Statement` parameter: `HOLD_CURSORS_OVER_COMMIT`, or `CLOSE_CURSORS_AT_COMMIT`.

The SQL default is `WITHOUT HOLD`.

The `JDBC` default for `HSQldb` result sets is `WITH HOLD` for read-only result sets and `WITHOUT HOLD` for updatable result sets.

If the holdability of a `ResultSet` is specified in a conflicting manner in the SQL statement and the `JDBC Statement` object, the `JDBC` setting takes precedence.

Autocommit

The autocommit property of a connection is a feature of `JDBC` and `ODBC` and is not part of the SQL Standard. In autocommit mode, all transactional statements are followed by an implicit commit. In autocommit mode, all `ResultSet` objects are read-only and holdable.

JDBC Overview

The `JDBC` settings, `ResultSet.CONCUR_READONLY` and `ResultSet.CONCUR_UPDATABLE` are the available alternatives for read-only or updatability. The default is `ResultSet.CONCUR_READONLY`.

The `JDBC` settings, `ResultSet.TYPE_FORWARD_ONLY`, `ResultSet.TYPE_SCROLL_INSENSITIVE`, `ResultSet.TYPE_SCROLL_SENSITIVE` are the available alternatives for both scrollability (navigation) and sensitivity. `HyperSQL` does not support `ResultSet.TYPE_SCROLL_SENSITIVE`. The two other alternatives can be used for both updatable and read-only result sets.

The `JDBC` settings `ResultSet.CLOSE_CURSORS_AT_COMMIT` and `ResultSet.HOLD_CURSORS_OVER_COMMIT` are the alternatives for the lifetime of the result set. The default is `ResultSet.CLOSE_CURSORS_AT_COMMIT`. The other setting can only be used for read-only result sets.

Examples of creating statements for updatable result sets are given below:

```
Connection c = newConnection();
Statement st;
c.setAutoCommit(false);
st = c.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_UPDATABLE);
st = c.createStatement(ResultSet.TYPE_SCROLL_INSENSITIVE, ResultSet.CONCUR_UPDATABLE);
```

JDBC Parameters

When a JDBC `PreparedStatement` or `CallableStatement` is used with an SQL statement that contains dynamic parameters, the data types of the parameters are resolved and determined by the engine when the statement is prepared. The SQL Standard has detailed rules to determine the data types and imposes limits on the maximum length or precision of the parameter. HyperSQL applies the standard rules with two exceptions for parameters with `String` and `BigDecimal` Java types. HyperSQL ignores the limits when the parameter value is set, and only enforces the necessary limits when the `PreparedStatement` is executed. In all other cases, parameter type limits are checked and enforced when the parameter is set.

In the example below the `setString()` calls do not raise an exception, but one of the `execute()` statements does.

```
// table definition: CREATE TABLE T (NAME VARCHAR(12), ...)
Connection c = newConnection();
PreparedStatement st = c.prepareStatement("SELECT * FROM T WHERE NAME = ?");
// type of the parameter is VARCHAR(12), which limits length to 12 characters
st.setString(1, "Eyjafjallajokull"); // string is longer than type, but no exception is raised here
st.execute(); // executes with no exception and does not find any rows

// but if an UPDATE is attempted, an exception is raised
st = c.prepareStatement("UPDATE T SET NAME = ? WHERE ID = 10");
st.setString(1, "Eyjafjallajokull"); // string is longer than type, but no exception is raised here
st.execute(); // exception is thrown when HyperSQL checks the value for update
```

All of the above also applies to setting the values in new and updated rows in updatable `ResultSet` objects.

JDBC parameters can be set with any compatible type, as supported by the JDBC specification. For `CLOB` and `BLOB` types, you can use streams, or create instances of `BLOB` or `CLOB` before assigning them to the parameters. You can even use `CLOB` or `BLOB` objects returned from connections to other RDBMS servers. The `Connection.createBlob()` and `createClob()` methods can be used to create the new LOBs. For very large LOB's the stream methods are preferable as they use less memory.

For array parameters, you must use a `java.sql.Array` object that contains the array elements before assigning to JDBC parameters. The `Connection.createArrayOf(...)` method can be used to create a new object, or you can use an `Array` returned from connections to other RDBMS servers.

JDBC and Data Change Statements

Data change statements, also called data manipulation statements (DML) such as `INSERT`, `UPDATE`, `MERGE` can be called with different `executeUpdate()` methods of `java.sql.Statement` and `java.sql.PreparedStatement`. Some of these methods allow you to specify how values for generated columns of the table are returned. These methods are documented in the JavaDoc for `org.hsqldb.jdbc.JDBCStatement` and `org.hsqldb.jdbc.JDBCPreparedStatement`. HyperSQL can return not just the generated columns, but any set of columns of the table. You can use this to retrieve the columns values that may be modified by a `BEFORE TRIGGER` on the table.

JDBC Callable Statement

The JDBC `CallableStatement` interface is used to call Java or SQL procedures that have been defined in the database. The SQL statement is in the form of `CALL procedureName (...)` with constant value arguments or with parameter markers. Note that you must use a parameter marker for `OUT` and `INOUT` arguments of the procedure you are calling. The `OUT` arguments should not be set before executing the callable statement.

After executing the statement, you can retrieve the `OUT` and `INOUT` parameters with the appropriate `getXXX()` method.

Procedures can also return one or more result sets. You should call the `getResultSet()` and `getMoreResults()` methods to retrieve the result sets one by one.

SQL functions can also return a table. You can call such functions the same way as procedures and retrieve the table as a `ResultSet`.

JDBC Returned Values

The methods of the JDBC `ResultSet` interface can be used to return values and to convert value to different types as supported by the JDBC specification.

When a CLOB and BLOB object is returned from a `ResultSet`, no data is transferred until the data is read by various methods of `java.sql.CLOB` and `java.sql.BLOB`. Data is streamed in large blocks to avoid excessive memory use.

Array objects are returned as instances of `java.sql.Array`.

Cursor Declaration

The `DECLARE CURSOR` statement is used within an SQL PROCEDURE body. In the current version HyperSQL 2.3, the cursor is used only to return a result set from the procedure. Therefore the cursor must be declared `WITH RETURN` and can only be `READ ONLY`.

DECLARE CURSOR

declare cursor statement

```
<declare cursor> ::= DECLARE <cursor name>
[ { SENSITIVE | INSENSITIVE | ASENSITIVE } ] [ { SCROLL | NO SCROLL } ]
CURSOR [ { WITH HOLD | WITHOUT HOLD } ] [ { WITH RETURN | WITHOUT RETURN } ]
FOR <query expression>
[ FOR { READ ONLY | UPDATE [ OF <column name list> ] } ]
```

The query expression is a `SELECT` statement or similar, and is discussed in the rest of this chapter. In the example below a cursor is declared for a `SELECT` statement. It is later opened to create the result set. The cursor is specified `WITHOUT HOLD`, so the result set is not kept after a commit. Use `WITH HOLD` to keep the result set. Note that you need to declare the cursor `WITH RETURN` as it is returned by the `CallableStatement`.

```
DECLARE thiscursor SCROLL CURSOR WITHOUT HOLD WITH RETURN FOR SELECT * FROM
INFORMATION_SCHEMA.TABLES;
--
OPEN thiscursor;
```

Syntax Elements

The syntax elements that can be used in data access and data change statements are described in this section. The SQL Standard has a very extensive set of definitions for these elements. The BNF definitions given here are sometimes simplified.

Literals

Literals are used to express constant values. The general type of a literal is known by its format. The specific type is based on conventions.

unicode escape elements*unicode escape elements*

```
<Unicode escape specifier> ::= [ UESCAPE <quote><Unicode escape
character><quote> ]
```

```
<Unicode escape value> ::= <Unicode 4 digit escape value> | <Unicode 6 digit
escape value> | <Unicode character escape value>
```

```
<Unicode 4 digit escape value> ::= <Unicode escape
character><hexit><hexit><hexit><hexit>
```

```
<Unicode 6 digit escape value> ::= <Unicode escape character><plus sign>
<hexit><hexit><hexit><hexit><hexit><hexit>
```

```
<Unicode character escape value> ::= <Unicode escape character><Unicode escape
character>
```

```
<Unicode escape character> ::= a single character than a <hexit> (a-f, A-F,
0-9), <plus sign>, <quote>, <double quote>, or <white space>
```

character literal*character literal*

```
<character string literal> ::= [ <introducer><character set specification> ]
<quote> [ <character representation>... ] <quote> [ { <separator> <quote>
[ <character representation>... ] <quote> }... ]
```

```
<introducer> ::= <underscore>
```

```
<character representation> ::= <nonquote character> | <quote symbol>
```

```
<nonquote character> ::= any character apart from the quote symbol.
```

```
<quote symbol> ::= <quote><quote>
```

```
<national character string literal> ::= N <quote> [ <character
representation>... ] <quote> [ { <separator> <quote> [ <character
representation>... ] <quote> }... ]
```

```
<Unicode character string literal> ::= [ <introducer><character set
specification> ] U<ampersand><quote> [ <Unicode representation>... ] <quote>
[ { <separator> <quote> [ <Unicode representation>... ] <quote> }... ] <Unicode
escape specifier>
```

```
<Unicode representation> ::= <character representation> | <Unicode escape value>
```

The type of a character literal is CHARACTER. The length of the string literal is the character length of the type. If the quote character is used in a string, it is represented with two quote characters. Long literals can be divided into multiple quoted strings, separated with a space or end-of-line character.

Unicode literals start with U& and can contain ordinary characters and unicode escapes. A unicode escape begins with the backslash (\) character and is followed by four hexadecimal characters which specify the character code.

Example of character literals are given below:

```
'a literal' ' string seperated' ' into parts'
'a string's literal form with quote character'
U&'Unicode string with Greek delta \0394 and phi \03a6 letters'
```

binary literal

binary literal

```
<binary string literal> ::= X <quote> [ <space>... ] [ { <hexit> [ <space>... ]
<hexit> [ <space>... ] }... ] <quote> [ { <separator> <quote> [ <space>... ]
[ { <hexit> [ <space>... ] <hexit> [ <space>... ] }... ] <quote> }... ]
```

```
<hexit> ::= <digit> | A | B | C | D | E | F | a | b | c | d | e | f
```

The type of a binary literal is BINARY. The octet length of the binary literal is the length of the type. Case-insensitive hexadecimal characters are used in the binary string. Each pair of characters in the literal represents a byte in the binary string. Long literals can be divided into multiple quoted strings, separated with a space or end-of-line character.

```
X'1abACD34' 'Af'
```

bit literal

bit literal

```
<bit string literal> ::= B <quote> [ <bit> ... ] <quote> [ { <separator> <quote>
[ <bit>... ] <quote> }... ]
```

```
<bit> ::= 0 | 1
```

The type of a binary literal is BIT. The bit length of the bit literal is the length of the type. Digits 0 and 1 are used to represent the bits. Long literals can be divided into multiple quoted strings, separated with a space or end-of-line character.

```
B'10001001' '00010'
```

numeric literal

numeric literal

```
<signed numeric literal> ::= [ <sign> ] <unsigned numeric literal>
```

```
<unsigned numeric literal> ::= <exact numeric literal> | <approximate numeric
literal>
```

```
<exact numeric literal> ::= <unsigned integer> [ <period> [ <unsigned integer> ] ]
| <period> <unsigned integer>
```

```
<sign> ::= <plus sign> | <minus sign>
```

```
<approximate numeric literal> ::= <mantissa> E <exponent>
```

```
<mantissa> ::= <exact numeric literal>
```

```
<exponent> ::= <signed integer>
```

```
<signed integer> ::= [ <sign> ] <unsigned integer>
```

<unsigned integer> ::= <digit>...

The type of an exact numeric literal without a decimal point is INTEGER, BIGINT, or DECIMAL, depending on the value of the literal (the smallest type that can represent the value is the type).

The type of an exact numeric literal with a decimal point is DECIMAL. The precision of a decimal literal is the total number of digits of the literal. The scale of the literal is the total number of digits to the right of the decimal point.

The type of an approximate numeric literal is DOUBLE. An approximate numeric literal always includes the mantissa and exponent, separated by E.

```
12
34.35
+12E-2
```

boolean literal

boolean literal

<boolean literal> ::= TRUE | FALSE | UNKNOWN

The boolean literal is one of the specified keywords.

datetime and interval literal

datetime and interval literal

<datetime literal> ::= <date literal> | <time literal> | <timestamp literal>

<date literal> ::= DATE <date string>

<time literal> ::= TIME <time string>

<timestamp literal> ::= TIMESTAMP <timestamp string>

<date string> ::= <quote> <unquoted date string> <quote>

<time string> ::= <quote> <unquoted time string> <quote>

<timestamp string> ::= <quote> <unquoted timestamp string> <quote>

<time zone interval> ::= <sign> <hours value> <colon> <minutes value>

<date value> ::= <years value> <minus sign> <months value> <minus sign> <days value>

<time value> ::= <hours value> <colon> <minutes value> <colon> <seconds value>

<interval literal> ::= INTERVAL [<sign>] <interval string> <interval qualifier>

<interval string> ::= <quote> <unquoted interval string> <quote>

<unquoted date string> ::= <date value>

<unquoted time string> ::= <time value> [<time zone interval>]

<unquoted timestamp string> ::= <unquoted date string> <space> <unquoted time string>

```

<unquoted interval string> ::= [ <sign> ] { <year-month literal> | <day-time
literal> }

<year-month literal> ::= <years value> [ <minus sign> <months value> ] | <months
value>

<day-time literal> ::= <day-time interval> | <time interval>

<day-time interval> ::= <days value> [ <space> <hours value> [ <colon> <minutes
value> [ <colon> <seconds value> ] ] ]

<time interval> ::= <hours value> [ <colon> <minutes value> [ <colon> <seconds
value> ] ] | <minutes value> [ <colon> <seconds value> ] | <seconds value>

<years value> ::= <datetime value>

<months value> ::= <datetime value>

<days value> ::= <datetime value>

<hours value> ::= <datetime value>

<minutes value> ::= <datetime value>

<seconds value> ::= <seconds integer value> [ <period> [ <seconds fraction> ] ]

<seconds integer value> ::= <unsigned integer>

<seconds fraction> ::= <unsigned integer>

<datetime value> ::= <unsigned integer>

```

The type of a datetime or interval type is specified in the literal. The fractional second precision is the number of digits in the fractional part of the literal. Details are described in the [SQL Language](#) chapter

```

DATE '2008-08-08'
TIME '20:08:08'
TIMESTAMP '2008-08-08 20:08:08.235'

INTERVAL '10' DAY
INTERVAL -'08:08' MINUTE TO SECOND

```

References, etc.

References are identifier chains, which can be a single identifiers or identifiers chains composed of single identifiers chained together with the period symbol.

identifier chain

identifier chain

```

<identifier chain> ::= <identifier> [ { <period> <identifier> }... ]

<basic identifier chain> ::= <identifier chain>

```

A period-separated chain of identifiers. The identifiers in an identifier chain can refer to database objects in a hierarchy. The possible hierarchies are as follows. In each hierarchy, elements from the start or the end can be missing, but the order of elements cannot be changed.

catalog, schema, database object

catalog, schema, table, column

correlation name, column

Examples of identifier chain are given below:

```
SELECT MYCAT.MYSCHEMA.MYTABLE.MYCOL FROM MYCAT.MYSCHEMA.MYTABLE
DROP TABLE MYCAT.MYSCHEMA.MYTABLE CASCADE
ALTER SEQUENCE MYCAT.MYSCHEMA.MYSEQUENCE RESTART WITH 100
```

column reference

column reference

<column reference> ::= <basic identifier chain> | MODULE <period> <qualified identifier> <period> <column name>

Reference a column or a routine variable.

SQL parameter reference

SQL parameter reference

<SQL parameter reference> ::= <basic identifier chain>

Reference an SQL routine parameter.

contextually typed value specification

contextually typed value specification

<contextually typed value specification> ::= <>null specification> | <default specification>

<>null specification> ::= NULL

<default specification> ::= DEFAULT

Specify a value whose data type or value is inferred from its context.

DEFAULT is used for assignments to table columns that have a default value, or to table columns that are generated either as an IDENTITY value or as an expression.

NULL can be used only in a context where the type of the value is known. For example, a NULL can be assigned to a column of the table in an INSERT or UPDATE statement, because the type of the column is known. But if NULL is used in a SELECT list, it must be used in a CAST statement.

Value Expression

Value expression is a general name for all expressions that return a value. Different types of expressions are allowed in different contexts.

value expression primary

value expression primary

```
<value expression primary> ::= <parenthesized value expression> |
<nonparenthesized value expression primary>
```

```
<parenthesized value expression> ::= <left paren> <value expression> <right
paren>
```

```
<nonparenthesized value expression primary> ::= <unsigned value specification>
| <column reference> | <set function specification> | <scalar subquery> | <case
expression> | <cast specification> | <next value expression> | <current value
expression> | <routine invocation>
```

Specify a value that is syntactically self-delimited.

value specification

value specification

```
<value specification> ::= <literal> | <general value specification>
```

```
<unsigned value specification> ::= <unsigned literal> | <general value
specification>
```

```
<target specification> ::= <host parameter specification> | <SQL parameter
reference> | <column reference> | <dynamic parameter specification>
```

```
<simple target specification> ::= <host parameter specification> | <SQL parameter
reference> | <column reference> | <embedded variable name>
```

```
<host parameter specification> ::= <host parameter name> [ <indicator
parameter> ]
```

```
<dynamic parameter specification> ::= <question mark>
```

Specify one or more values, host parameters, SQL parameters, dynamic parameters, or host variables.

row value expression

row value expression

```
<row value expression> ::= <row value special case> | <explicit row value
constructor>
```

```
<row value predicand> ::= <row value special case> | <row value constructor
predicand>
```

```
<row value special case> ::= <nonparenthesized value expression primary>
```

```
<explicit row value constructor> ::= <left paren> <row value constructor element>
<comma> <row value constructor element list> <right paren> |
```

```
ROW <left paren> <row value constructor element list> <right paren> | <row
subquery>
```

Specify a row consisting of one or more elements. A comma separated list of expressions, enclosed in brackets, with the optional keyword ROW. In SQL, a row containing a single element can often be used where a single value is expected.

set function specification

set function specification

<set function specification> ::= <aggregate function> | <grouping operation>

<grouping operation> ::= GROUPING <left paren> <column reference> [{ <comma> <column reference> }...] <right paren>

Specify a value derived by the application of a function to an argument. HyperSQL does not yet support <grouping operation>.

COALESCE*coalesce expression*

<coalesce expression> := COALESCE <left paren> <value expression> { <comma> <value expression> }... <right paren>

Replace null values with another value. The coalesce expression has two or more instances of <value expression>. If the first <value expression> evaluates to a non-null value, it is returned as the result of the coalesce expression. If it is null, the next <value expression> is evaluated and if it evaluates to a non-non value, it is returned, and so on.

The type of the return value of a COALESCE expression is the aggregate type of the types of all the <value expression> instances. Therefore, any value returned is implicitly cast to this type. HyperSQL also features built-in functions with similar functionality.

NULLIF*nullif expression*

<>nullif expression> := NULLIF <left paren> <value expression> <comma> <value expression> <right paren>

Return NULL if two values are equal. If the result of the first <value expression> is not equal to the result of the second, then it is returned, otherwise NULL is returned. The type of the return value is the type of the first <value expression>.

```
SELECT i, NULLIF(n, 'not defined') FROM t
```

CASE*case specification*

<case specification> ::= <simple case> | <searched case>

<simple case> ::= CASE <case operand> <simple when clause>... [<else clause>] END

<searched case> ::= CASE <searched when clause>... [<else clause>] END

<simple when clause> ::= WHEN <when operand list> THEN <result>

<searched when clause> ::= WHEN <search condition> THEN <result>

<else clause> ::= ELSE <result>

<case operand> ::= <row value predicand> | <overlaps predicate part 1>

<when operand list> ::= <when operand> [{ <comma> <when operand> }...]

```
<when operand> ::= <row value predicand> | <comparison predicate part 2> |
<between predicate part 2> | <in predicate part 2> | <character like predicate
part 2> | <octet like predicate part 2> | <similar predicate part 2> | <regex like
predicate part 2> | <null predicate part 2> | <quantified comparison predicate
part 2> | <match predicate part 2> | <overlaps predicate part 2> | <distinct
predicate part 2>
```

```
<result> ::= <result expression> | NULL
```

```
<result expression> ::= <value expression>
```

Specify a conditional value. The result of a case expression is always a value. All the values introduced with THEN must be of the same type or convertible to the same type.

Some simple examples of the CASE expression are given below. The first two examples return 'Britain', 'Germany', or 'Other country' depending on the value of dialcode. The third example uses IN and smaller-than predicates.

```
CASE dialcode WHEN 44 THEN 'Britain' WHEN 49 THEN 'Germany' ELSE 'Other country' END
CASE WHEN dialcode=44 THEN 'Britain' WHEN dialcode=49 THEN 'Germany' WHEN dialcode < 0 THEN 'bad
dial code' ELSE 'Other country' END
CASE dialcode WHEN IN (44, 49,30) THEN 'Europe' WHEN IN (86,91,91) THEN 'Asia' WHEN < 0 THEN
'bad dial code' ELSE 'Other continent' END
```

The case statement can be far more complex and involve several conditions.

CAST

cast specification

```
<cast specification> ::= CAST <left paren> <cast operand> AS <cast target>
<right paren>
```

```
<cast operand> ::= <value expression> | <implicitly typed value specification>
```

```
<cast target> ::= <domain name> | <data type>
```

Specify a data conversion. Data conversion takes place automatically among variants of a general type. For example numeric values are freely converted from one type to another in expressions.

Explicit type conversion is necessary in two cases. One case is to determine the type of a NULL value. The other case is to force conversion for special purposes. Values of data types can be cast to a character type. The exception is BINARY and OTHER types. The result of the cast is the literal expression of the value. Conversely, a value of a character type can be converted to another type if the character value is a literal representation of the value in the target type. Special conversions are possible between numeric and interval types, which are described in the section covering interval types.

The examples below show examples of cast with their result:

```
CAST (NULL AS TIMESTAMP)
CAST (' 199 ' AS INTEGER) = 199
CAST ('true ' AS BOOLEAN) = TRUE
CAST (INTERVAL '2' DAY AS INTEGER) = 2
CAST ('1992-04-21' AS DATE) = DATE '1992-04-21'
```

NEXT VALUE FOR

next value expression

```
<next value expression> ::= NEXT VALUE FOR <sequence generator name>
```

Return the next value of a sequence generator. This expression can be used as a select list element in queries, or in assignments to table columns in data change statements. If the expression is used more than once in a single row that is being evaluated, the same value is returned for each invocation. After evaluation of the particular row is complete, the sequence generator will return a different value from the old value. The new value is generated by the sequence generator by adding the increment to the last value it generated. In SQL syntax compatibility modes, variants of this expression in different SQL dialects are supported. In the example below the expression is used in an insert statement:

```
INSERT INTO MYTABLE(COL1, COL2) VALUES 2, NEXT VALUE FOR MYSEQUENCE
```

CURRENT VALUE FOR

current value expression

```
<current value expression> ::= CURRENT VALUE FOR <sequence generator name>
```

Return the latest value that was returned by the NEXT VALUE FOR expression for a sequence generator in this session. In the example below, the value that was generated by the sequence for the first insert, is reused for the second insert:

```
INSERT INTO MYTABLE(COL1, COL2) VALUES 2, NEXT VALUE FOR MYSEQUENCE;
INSERT INTO CHILDTABLE(COL1, COL2) VALUES 10, CURRENT VALUE FOR MYSEQUENCE;
```

value expression

value expression

```
<value expression> ::= <numeric value expression> | <string value expression>
| <datetime value expression> | <interval value expression> | <boolean value
expression> | <row value expression>
```

An expression that returns a value. The value can be a single value, or a row consisting more than one value.

numeric value expression

numeric value expression

```
<numeric value expression> ::= <term> | <numeric value expression> <plus sign>
<term> | <numeric value expression> <minus sign> <term>
```

```
<term> ::= <factor> | <term> <asterisk> <factor> | <term> <solidus> <factor>
```

```
<factor> ::= [ <sign> ] <numeric primary>
```

```
<numeric primary> ::= <value expression primary> | <numeric value function>
```

Specify a numeric value. The BNF indicates that <asterisk> and <solidus> (the operators for multiplication and division) have precedence over <minus sign> and <plus sign>.

numeric value function

numeric value function

```
<numeric value function> ::= <position expression> | <extract expression> |
<length expression> ...
```

Specify a function yielding a value of type numeric. The supported numeric value functions are listed and described in the [Built In Functions](#) chapter.

string value expression*string value expression*

```

<string value expression> ::= <string concatenation> | <string factor>
<string factor> ::= <value expression primary> | <string value function>
<string concatenation> ::= <string value expression> <concatenation operator>
<string factor>
<concatenation operator> ::= ||

```

Specify a character string value, a binary string value, or a bit string value. The BNF indicates that a string value expression can be formed by concatenation of two or more <value expression primary>. The types of the <value expression primary> elements must be compatible, that is, all must be string, or binary or bit string values.

character value function*string value function*

```

<string value function> ::= ...

```

Specify a function that returns a character string or binary string. The supported character value functions are listed and described in the [Built In Functions](#) chapter.

datetime value expression*datetime value expression*

```

<datetime value expression> ::= <datetime term> | <interval value expression>
<plus sign> <datetime term> | <datetime value expression> <plus sign> <interval
term> | <datetime value expression> <minus sign> <interval term>
<datetime term> ::= <datetime factor>
<datetime factor> ::= <datetime primary> [ <time zone> ]
<datetime primary> ::= <value expression primary> | <datetime value function>
<time zone> ::= AT <time zone specifier>
<time zone specifier> ::= LOCAL | TIME ZONE <interval primary>

```

Specify a datetime value. Details are described in the [SQL Language](#) chapter.

datetime value function*datetime value function*

```

<datetime value function> ::= ...

```

Specify a function that returns a datetime value. The supported datetime value functions are listed and described in the [Built In Functions](#) chapter.

interval term

interval value expression

```
<interval value expression> ::= <interval term> | <interval value expression 1> <plus sign> <interval term 1> | <interval value expression 1> <minus sign> <interval term 1> | <left paren> <datetime value expression> <minus sign> <datetime term> <right paren> <interval qualifier>
```

```
<interval term> ::= <interval factor> | <interval term 2> <asterisk> <factor> | <interval term 2> <solidus> <factor> | <term> <asterisk> <interval factor>
```

```
<interval factor> ::= [ <sign> ] <interval primary>
```

```
<interval primary> ::= <value expression primary> [ <interval qualifier> ] | <interval value function>
```

```
<interval value expression 1> ::= <interval value expression>
```

```
<interval term 1> ::= <interval term>
```

```
<interval term 2> ::= <interval term>
```

Specify an interval value. Details are described in the [SQL Language](#) chapter.

interval absolute value function*interval value function*

```
<interval value function> ::= <interval absolute value function>
```

```
<interval absolute value function> ::= ABS <left paren> <interval value expression> <right paren>
```

Specify a function that returns the absolute value of an interval. If the interval is negative, it is negated, otherwise the original value is returned.

boolean value expression*boolean value expression*

```
<boolean value expression> ::= <boolean term> | <boolean value expression> OR <boolean term>
```

```
<boolean term> ::= <boolean factor> | <boolean term> AND <boolean factor>
```

```
<boolean factor> ::= [ NOT ] <boolean test>
```

```
<boolean test> ::= <boolean primary> [ IS [ NOT ] <truth value> ]
```

```
<truth value> ::= TRUE | FALSE | UNKNOWN
```

```
<boolean primary> ::= <predicate> | <boolean predicand>
```

```
<boolean predicand> ::= <parenthesized boolean value expression> | <nonparenthesized value expression primary>
```

```
<parenthesized boolean value expression> ::= <left paren> <boolean value expression> <right paren>
```

Specify a boolean value.

Predicates

Predicates are conditions with two sides and evaluate to a boolean value. The left side of the predicate, the `<row value predicand>`, is the common element of all predicates. This element is a generalisation of both `<value expression>`, which is a scalar, and of `<explicit row value constructor>`, which is a row. The two sides of a predicate can be split in CASE statements where the `<row value predicand>` is part of multiple predicates.

The number of fields in all `<row value predicand>` used in predicates must be the same and the types of the fields in the same position must be compatible for comparison. If either of these conditions does not hold, an exception is raised. The number of fields in a row is called the *degree*.

In many types of predicates (but not all of them), if the `<row value predicand>` evaluates to NULL, the result of the predicate is UNKNOWN. If the `<row value predicand>` has more than one element, and one or more of the fields evaluate to NULL, the result depends on the particular predicate.

comparison predicand

comparison predicate

```
<comparison predicate> ::= <row value predicand> <comp op> <row value predicand>
<comp op> ::= <equals operator> | <not equals operator> | <less than operator>
| <greater than operator> | <less than or equals operator> | <greater than or
equals operator>
```

Specify a comparison of two row values. If either `<row value predicand>` evaluates to NULL, the result of `<comparison predicate>` is UNKNOWN. Otherwise, the result is TRUE, FALSE or UNKNOWN.

If the *degree* of `<row value predicand>` is larger than one, comparison is performed between each field and the corresponding field in the other `<row value predicand>` from left to right, one by one.

When comparing two elements, if either field is NULL then the result is UNKNOWN.

For `<equals operator>`, if the result of comparison is TRUE for all field, the result of the predicate is TRUE. If the result of comparison is FALSE for one field, the result of predicate is FALSE. Otherwise the result is UNKNOWN.

The `<not equals operator>` is translated to NOT (`<row value predicand> = <row value predicand>`).

The `<less than or equals operator>` is translated to (`<row value predicand> = <row value predicand>`) OR (`<row value predicand> < <row value predicand>`). The `<greater than or equals operator>` is translated similarly.

For the `<less than operator>` and `<greater than operator>`, if two fields at a given position are equal, then comparison continues to the next field. Otherwise, the result of the last performed comparison is returned as the result of the predicate. This means that if the first field is NULL, the result is always UNKNOWN.

The logic that governs NULL values and UNKNOWN result is as follows: Suppose the NULL values were substituted by arbitrary real values. If substitution cannot change the result of the predicate, then the result is TRUE or FALSE, based on the existing non-NULL values, otherwise the result of the predicate is UNKNOWN.

The examples of comparison given below use literals, but the literals actually represent the result of evaluation of some expression.

```

((1, 2, 3, 4) = (1, 2, 3, 4)) IS TRUE
((1, 2, 3, 4) = (1, 2, 3, 5)) IS FALSE
((1, 2, 3, 4) < (1, 2, 3, 4)) IS FALSE
((1, 2, 3, 4) < (1, 2, 3, 5)) IS TRUE
((NULL, 1, NULL) = (NULL, 1, NULL)) IS UNKNOWN
((NULL, 1, NULL) = (NULL, 2, NULL)) IS FALSE
((NULL, 1, NULL) <> (NULL, 2, NULL)) IS TRUE
((NULL, 1, 2) <all operators> (NULL, 1, 2)) IS UNKNOWN
((1, NULL, ...) < (1, 2, ...)) IS UNKNOWN
((1, NULL, ...) < (2, NULL, ...)) IS TRUE
((2, NULL, ...) < (1, NULL, ...)) IS FALSE

```

BETWEEN

between predicate

```
<between predicate> ::= <row value predicand> <between predicate part 2>
```

```
<between predicate part 2> ::= [ NOT ] BETWEEN [ ASYMMETRIC | SYMMETRIC ] <row
value predicand> AND <row value predicand>
```

Specify a range comparison. The default is ASYMMETRIC. The expression `X BETWEEN Y AND Z` is equivalent to `(X >= Y AND X <= Z)`. Therefore if `Y > Z`, the BETWEEN expression is never true. The expression `X BETWEEN SYMMETRIC Y AND Z` is equivalent to `(X >= Y AND X <= Z) OR (X >= Z AND X <= Y)`. The expression `Z NOT BETWEEN ...` is equivalent to `NOT (Z BETWEEN ...)`. If any of the three `<row value predicand>` evaluates to NULL, the result is UNKNOWN.

IN

in predicate

```
<in predicate> ::= <row value predicand> [ NOT ] IN <in predicate value>
```

```
<in predicate value> ::= <table subquery> | <left paren> <in value list> <right
paren>
```

```
| <left paren> UNNEST <left paren> <array value expression> <right paren> <right
paren>
```

```
<in value list> ::= <row value expression> [ { <comma> <row value
expression> }... ]
```

Specify a quantified comparison. The expression `X NOT IN Y` is equivalent to `NOT (X IN Y)`. The `(<in value list>)` is converted into a table with one or more rows. The expression `X IN Y` is equivalent to `X = ANY Y`, which is a `<quantified comparison predicate>`.

If the `<table subquery>` returns no rows, the result is FALSE. Otherwise the `<row value predicand>` is compared one by one with each row of the `<table subquery>`.

If the comparison is TRUE for at least one row, the result is TRUE. If the comparison is FALSE for all rows, the result is FALSE. Otherwise the result is UNKNOWN.

HyperSQL supports an extension to the SQL Standard to allow an array to be used in the `<in predicate value>`. This is intended to be used with prepared statements where a variable length array of values can be used as the parameter value for each call. The example below shows how this is used in SQL. The JDBC code must create a new `java.sql.Array` object that contains the values and set the parameter with this array.

```
SELECT * FROM customer WHERE firstname IN ( UNNEST(?) )
```

```

Connection conn;
PreparedStatement ps;
// conn and ps are instantiated here
Array arr = conn.createArrayOf("INTEGER", new Integer[] {1, 2, 3});
ps.setArray(1, arr);
ResultSet rs = ps.executeQuery();

```

LIKE*like predicate*

<like predicate> ::= <character like predicate> | <octet like predicate>

<character like predicate> ::= <row value predicand> [NOT] LIKE <character pattern> [ESCAPE <escape character>]

<character pattern> ::= <character value expression>

<escape character> ::= <character value expression>

<octet like predicate> ::= <row value predicand> [NOT] LIKE <octet pattern> [ESCAPE <escape octet>]

<octet pattern> ::= <binary value expression>

<escape octet> ::= <binary value expression>

Specify a pattern-match comparison for character or binary strings. The <row value predicand> is always a <string value expression> of character or binary type. The <character pattern> or <octet pattern> is a <string value expression> in which the underscore and percent characters have special meanings. The underscore means match any one character, while the percent means match a sequence of zero or more characters. The <escape character> or <escape octet> is also a <string value expression> that evaluates to a string of exactly one character length. If the underscore or the percent is required as normal characters in the pattern, the specified <escape character> or <escape octet> can be used in the pattern before the underscore or the percent. The <row value predicand> is compared with the <character pattern> and the result of comparison is returned. If any of the expressions in the predicate evaluates to NULL, the result of the predicate is UNKNOWN. The expression A NOT LIKE B is equivalent to NOT (A LIKE B). If the length of the escape is not 1 or it is used in the pattern not immediately before an underscore or a percent character, an exception is raised.

IS NULL*null predicate*

<null predicate> ::= <row value predicand> IS [NOT] NULL

Specify a test for a null value. The expression X IS NOT NULL is NOT equivalent to NOT (X IS NULL) if the degree of the <row value predicand> is larger than 1. The rules are: If all fields are null, X IS NULL is TRUE and X IS NOT NULL is FALSE. If only some fields are null, both X IS NULL and X IS NOT NULL are FALSE. If all fields are not null, X IS NULL is FALSE and X IS NOT NULL is TRUE.

ALL and ANY*quantified comparison predicate*

<quantified comparison predicate> ::= <row value predicand> <comp op>
<quantifier> <table subquery>

```
<quantifier> ::= <all> | <some>
```

```
<all> ::= ALL
```

```
<some> ::= SOME | ANY
```

Specify a quantified comparison. For a quantified comparison, the `<row value predicand>` is compared one by one with each row of the `<table sub query>`.

If the `<table subquery>` returns no rows, then if ALL is specified the result is TRUE, but if SOME or ANY is specified the result is FALSE.

If ALL is specified, if the comparison is TRUE for all rows, the result of the predicate is TRUE. If the comparison is FALSE for at least one row, the result is FALSE. Otherwise the result is UNKNOWN.

If SOME or ANY is specified, if the comparison is TRUE for at least one row, the result is TRUE. If the comparison is FALSE for all rows, the result is FALSE. Otherwise the result is UNKNOWN. Note that the IN predicate is equivalent to the SOME or ANY predicate using the `<equals operator>`.

In the examples below, the date of an invoice is compared to holidays in a given year. In the first example the invoice date must equal one of the holidays, in the second example it must be later than all holidays (later than the last holiday), in the third example it must be on or after some holiday (on or after the first holiday), and in the fourth example, it must be before all holidays (before the first holiday).

```
invoice_date = SOME (SELECT holiday_date FROM holidays)
invoice_date > ALL (SELECT holiday_date FROM holidays)
invoice_date >= ANY (SELECT holiday_date FROM holidays)
invoice_date < ALL (SELECT holiday_date FROM holidays)
```

EXISTS

exists predicate

```
<exists predicate> ::= EXISTS <table subquery>
```

Specify a test for a non-empty set. If the evaluation of `<table subquery>` results in one or more rows, then the expression is TRUE, otherwise FALSE.

UNIQUE

unique predicate

```
<unique predicate> ::= UNIQUE <table subquery>
```

Specify a test for the absence of duplicate rows. The result of the test is either TRUE or FALSE (never UNKNOWN). The rows of the `<table subquery>` that contain one or more NULL values are not considered for this test. If the rest of the rows are distinct from each other, the result of the test is TRUE, otherwise it is FALSE. The distinctness of rows X and Y is tested with the predicate `X IS DISTINCT FROM Y`.

MATCH

match predicate

```
<match predicate> ::= <row value predicand> MATCH [ UNIQUE ] [ SIMPLE | PARTIAL
| FULL ] <table subquery>
```

Specify a test for matching rows. The default is MATCH SIMPLE without UNIQUE. The result of the test is either TRUE or FALSE (never UNKNOWN).

The interpretation of NULL values is different from other predicates and quite counter-intuitive. If the `<row value predicand>` is NULL, or all of its fields are NULL, the result is TRUE.

Otherwise, the `<row value predicand>` is compared with each row of the `<table subquery>`.

If SIMPLE is specified, if some field of `<row value predicate>` is NULL, the result is TRUE. Otherwise if `<row value predicate>` is equal to one or more rows of `<table subquery>` the result is TRUE if UNIQUE is not specified, or if UNIQUE is specified and only one row matches. Otherwise the result is FALSE.

If PARTIAL is specified, if the non-null values `<row value predicate>` are equal to those in one or more rows of `<table subquery>` the result is TRUE if UNIQUE is not specified, or if UNIQUE is specified and only one row matches. Otherwise the result is FALSE.

If FULL is specified, if some field of `<row value predicate>` is NULL, the result is FALSE. Otherwise if `<row value predicate>` is equal to one or more rows of `<table subquery>` the result is TRUE if UNIQUE is not specified, or if UNIQUE is specified and only one row matches.

Note that MATCH can also be used in FOREIGN KEY constraint definitions. The exact meaning is described in the Schemas and Database Objects chapter.

CONTAINS

contains predicate

```
<contains predicate> ::= PERIOD <row value predicand> CONTAINS PERIOD <row value predicand>
```

Specify a test for two datetime periods. Each `<row value predicand>` must have two fields and the fields together represent a datetime period. So the predicates is always in the form `PERIOD (X1, X2) CONTAINS PERIOD (Y1, Y2)`. The first field in each period is always a datetime value, while the second field is either a datetime value or a positive interval value.

If the second field in a period is an interval value, it is replaced with the sum of the datetime value and itself, for example `PERIOD(X1, X1 + X2) OVERLAPS PERIOD (Y1, Y1 + Y 2)`.

All datetime values are converted to `TIMESTAMP WITH TIME ZONE`. The second datetime value must be after the first, otherwise a data error is returned.

If the second period is fully within the first period, the result is TRUE. Otherwise it is false.

If any of the values is NULL, the result is UNDEFINED.

EQUALS

equals predicate

```
<equals predicate> ::= PERIOD <row value predicand> EQUALS PERIOD <row value predicand>
```

Specify a test for two datetime periods. The conversions and checks are applied the same way as with the CONTAINS predicate. If the two period have the same begin and end datatime values the result is TRUE. Otherwise it is false.

If any of the values is NULL, the result is UNDEFINED.

OVERLAPS

overlaps predicate

```
<overlaps predicate> ::= <row value predicand> OVERLAPS <row value predicand>
```

```
<overlaps predicate> ::= PERIOD <row value predicand> OVERLAPS PERIOD <row value predicand>
```

The OVERLAPS predicate tests for an overlap between two datetime periods. This predicate has two forms. The one without the PERIOD keywords is more relaxed in terms of valid periods.

If there is there is any overlap between the two datetime periods, the result is TRUE. Otherwise it is false.

If any of the values is NULL, the result is UNDEFINED.

In the example below, the period is compared with a week long period ending yesterday.

```
(startdate, enddate) OVERLAPS (CURRENT_DATE - 7 DAY, CURRENT_DATE - 1 DAY)
```

PRECEDES

precedes predicate

```
<precedes predicate> ::= PERIOD <row value predicand> [ IMMEDIATELY ] PRECEDES PERIOD <row value predicand>
```

Specify a test for two datetime periods. The conversions and checks are applied the same way as with the CONTAINS predicate. If the second period begins after the end of the first period, the result is TRUE. Otherwise it is false.

If IMMEDIATELY is specified, the second period must follow immediately after the end of the first period. This means the end of the first period is the same point of time as the start of the second period.

If any of the values is NULL, the result is UNDEFINED.

SUCCEEDS

succeeds predicate

```
<succeeds predicate> ::= PERIOD <row value predicand> [ IMMEDIATELY ] SUCCEEDS PERIOD <row value predicand>
```

Specify a test for two datetime periods with similar syntax to PRECEDES. If the first period begins after the end of the second period, the result is TRUE. Otherwise it is false.

If IMMEDIATELY is specified, the first period must follow immediately after the end of the second period.

If any of the values is NULL, the result is UNKNOWN.

The example below shows a predicate that returns TRUE.

```
PERIOD (CURRENT_DATE - 7 DAY, CURRENT_DATE) IMMEDIATELY PRECEDES (CURRENT_DATE, CURRENT_DATE + 7 DAY)
```

IS DISTINCT

is distinct predicate

```
<distinct predicate> ::= <row value predicand> IS [ NOT ] DISTINCT FROM <row value predicand>
```

Specify a test of whether two row values are distinct. The result of the test is either TRUE or FALSE (never UNKNOWN). The *degree* the two <row value predicand> must be the same. Each field of the first <row value predicand> is compared to the field of the second <row value predicand> at the same position. If one field is NULL and the other is not NULL, or if the elements are NOT equal, then the result of the expression is TRUE. If no comparison result is TRUE, then the result of the predicate is FALSE. The expression `X IS NOT DISTINCT FROM Y` is equivalent to `NOT (X IS DISTINCT FORM Y)`. The following check returns true if `startdate` is not equal to `enddate`. It also returns true if either `startdate` or `enddate` is NULL. It returns false in other cases.

```
startdate IS DISTINCT FROM enddate
```

Aggregate Functions

aggregate function

aggregate function

```
<aggregate function> ::= COUNT <left paren> <asterisk> <right paren> [ <filter clause> ] | <general set function> [ <filter clause> ] | <array aggregate function> [ <filter clause> ]
```

```
<general set function> ::= <set function type> <left paren> [ <set quantifier> ] <value expression> <right paren>
```

```
<set function type> ::= <computational operation>
```

```
<computational operation> ::= AVG | MAX | MIN | SUM | EVERY | ANY | SOME | COUNT | STDDEV_POP | STDDEV_SAMP | VAR_SAMP | VAR_POP | MEDIAN
```

```
<set quantifier> ::= DISTINCT | ALL
```

```
<filter clause> ::= FILTER <left paren> WHERE <search condition> <right paren>
```

```
<array aggregate function> ::= ARRAY_AGG <left paren> [ <set quantifier> ] <value expression> [ <order by clause> ] <right paren>
```

```
<group concat function> ::= GROUP_CONCAT <left paren> [ <set quantifier> ] <value expression> [ <order by clause> ] [ SEPARATOR <separator> ] <right paren>
```

```
<separator> ::= <character string literal>
```

Specify a value computed from a collection of rows.

An aggregate function is used exclusively in a <query specification> and its use transforms a normal query into an aggregate query returning a single row instead of the multiple rows that the original query returns. For example, `SELECT acolumn <table expression>` is a query that returns the value of `acolumn` for all the rows the satisfy the given condition. But `SELECT MAX(acolumn) <table expression>` returns only one row, containing the largest value in that column. The query `SELECT COUNT(*) <table expression>` returns the count of rows, while `SELECT COUNT(acolumn) <table expression>` returns the count of rows where `acolumn` IS NOT NULL.

If the <table expression> is a grouped table (has a GROUP BY clause), the aggregate function returns the result of the COUNT or <computational operation> for each group. In this case the result has the same number of rows as the original grouped query. For example `SELECT SUM(acolumn) <table expression>` when <table expression> has a GROUP BY clause, returns the sum of values for `acolumn` in each group.

If all values are NULL, the aggregate function (except COUNT) returns NULL.

The SUM operations can be performed on numeric and interval expressions only. AVG and MEDIAN can be performed on numeric, interval or datetime expressions. AVG returns the average value, while SUM returns the sum of all values. MEDIAN returns the middle value in the sorted list of values.

MAX and MIN can be performed on all types of expressions and return the minimum or the maximum value.

COUNT(*) returns the count of all values, including nulls, while COUNT(<value expression>) returns the count of non-NULL values. COUNT with DISTINCT also accepts multiple arguments. In this usage the distinct combinations of the arguments are counted. Examples below:

```
SELECT COUNT(DISTINCT firstname, lastname) FROM customer
SELECT COUNT(DISTINCT (firstname, lastname)) FROM customer
```

The EVERY, ANY and SOME operations can be performed on boolean expressions only. EVERY returns TRUE if all the values are TRUE, otherwise FALSE. ANY and SOME are the same operation and return TRUE if one of the values is TRUE, otherwise it returns FALSE.

The other operations perform the statistical functions STDDEV_POP, STDDEV_SAMP, VAR_SAMP, VAR_POP on numeric values. NULL values are ignored in calculations.

User-defined aggregate functions can be defined and used instead of the built-in aggregate functions. Syntax and examples are given in the [SQL-Invoked Routines](#) chapter.

The <filter clause> allows you to add a search condition. When the search condition evaluates to TRUE for a row, the row is included in aggregation. Otherwise the row is not included. In the example below a single query returns two different filtered counts:

```
SELECT COUNT(ITEM) FILTER (WHERE GENDER = 'F') AS "FEMALE COUNT", COUNT(ITEM) FILTER (WHERE
GENDER = 'M') AS "MALE COUNT" FROM PEOPLE
```

ARRAY_AGG is different from all other aggregate functions, as it does not ignore the NULL values. This set function returns an array that contains all the values, for different rows, for the <value expression>. For example, if the <value expression> is a column reference, the SUM function adds the values for all the row together, while the ARRAY_AGG function adds the value for each row as a separate element of the array. ARRAY_AGG can include an optional <order by clause>. If this is used, the elements of the returned array are sorted according to the <order by clause>, which can reference all the available columns of the query, not just the <value expression> that is used as the ARRAY_AGG argument. The <order by clause> can have multiple elements (columns) and each element can include NULLS LAST or DESC qualifiers. No <separator> is used with this function.

GROUP_CONCAT is a specialised function derived from ARRAY_AGG. This function computes the array in the same way as ARRAY_AGG, removes all the NULL elements, then returns a string that is a concatenation of the elements of the array. If <separator> has been specified, it is used to separate the elements of the array. Otherwise the comma is used to separate the elements.

The example below shows a grouped query with ARRAY_AGG and GROUP_CONCAT. The CUSTOMER table that is included for tests in the DatabaseManager GUI app is the source of the data.

```
SELECT LASTNAME, ARRAY_AGG(FIRSTNAME ORDER BY FIRSTNAME) FROM Customer GROUP BY LASTNAME

LASTNAME  C2
-----
Steel     ARRAY[ 'John', 'John', 'Laura', 'Robert' ]
King      ARRAY[ 'George', 'George', 'James', 'Julia', 'Robert', 'Robert' ]
Sommer    ARRAY[ 'Janet', 'Robert' ]

SELECT LASTNAME, GROUP_CONCAT(DISTINCT FIRSTNAME ORDER BY FIRSTNAME DESC SEPARATOR ' * ') FROM
Customer GROUP BY LASTNAME

LASTNAME  C2
```

```
-----
Steel      Robert * Laura * John
King       Robert * Julia * James * George
Sommer     Robert * Janet
```

Other Syntax Elements

search condition

search condition

```
<search condition> ::= <boolean value expression>
```

Specify a condition that is TRUE, FALSE, or UNKNOWN. A search condition is often a predicate.

PATH

path specification

```
<path specification> ::= PATH <schema name list>
```

```
<schema name list> ::= <schema name> [ { <comma> <schema name> }... ]
```

Specify an order for searching for a user-defined SQL-invoked routine. This is not currently supported by HyperSQL.

routine invocation

routine invocation

```
<routine invocation> ::= <routine name> <SQL argument list>
```

```
<routine name> ::= [ <schema name> <period> ] <qualified identifier>
```

```
<SQL argument list> ::= <left paren> [ <SQL argument> [ { <comma> <SQL argument> }... ] ] <right paren>
```

```
<SQL argument> ::= <value expression> | <target specification>
```

Invoke an SQL-invoked routine. Examples are given in the [SQL-Invoked Routines](#) chapter.

COLLATE

collate clause

```
<collate clause> ::= COLLATE <collation name>
```

Specify a collation for a column or for an ORDER BY expression. This collation is used for comparing the values of the column in different rows. Comparison can happen during the execution of SELECT, UPDATE or DELETE statements, when a UNIQUE constraint or index is defined on the column, or when the rows are sorted by an ORDER BY clause.

CONSTRAINT

constraint name definition

```
<constraint name definition> ::= CONSTRAINT <constraint name>
```

```
<constraint characteristics> ::= <constraint check time> [ [ NOT ] DEFERRABLE ]
| [ NOT ] DEFERRABLE [ <constraint check time> ]
```

```
<constraint check time> ::= INITIALLY DEFERRED | INITIALLY IMMEDIATE
```

Specify the name of a constraint and its characteristics. This is an optional element of CONSTRAINT definition, not yet supported by HyperSQL.

Data Access Statements

HyperSQL fully supports all of SQL-92 data access statements, plus some additions from SQL:2011. Due to time constraints, the current version of this Guide does not cover the subject fully. You are advised to consult an SQL book such as the recent O'Reilly title "SQL and Relational Theory" by C. J. Date.

Database queries are data access statements. The most commonly used data access statement is the SELECT statement, but there are other statements that perform a similar role. Data access statements access tables and return result tables. The returned result tables are falsely called result sets, as they are not necessarily sets of rows, but multisets of rows.

Result tables are formed by performing the following operations on base tables and views. These operations are loosely based on Relational Algebra.

JOIN operations

SET and *MULTISET* operations

SELECTION

PROJECTION

COMPUTING

COLUMN NAMING

GROUPING and *AGGREGATION*

SELECTION AFTER GROUPING OR AGGREGATION

SET and MULTISET (COLLECTION) OPERATIONS

ORDERING

SLICING

Conceptually, the operations are performed one by one in the above order if they apply to the given data access statement. In the example below a simple select statement is made more complex by adding various operations.

```
CREATE TABLE atable (a INT, b INT, c INT, d INT, e INT, f INT);
/* in the next SELECT, no join is performed and no further operation takes place */
SELECT * FROM atable
/* in the next SELECT, selection is performed by the WHERE clause, with no further action */
SELECT * FROM atable WHERE a + b = c
/* in the next SELECT, projection is performed after the other operations */
SELECT d, e, f FROM atable WHERE a + b = c
/* in the next SELECT, computation is performed after projection */
SELECT (d + e) / f FROM atable WHERE a + b = c
/* in the next two SELECT statements, column naming is performed in different ways*/
SELECT (a + e) / f AS calc, f AS div FROM atable WHERE a + b = c
SELECT dcol, ecol, fcol FROM atable(acol, bcol, ccol, dcol, ecol, fcol) WHERE acol + bcol = ccol
/* in the next SELECT, both grouping and aggregation is performed */
SELECT d, e, SUM(f) FROM atable GROUP BY d, e
/* in the next SELECT, selection is performed after grouping and aggregation is performed */
SELECT d, e, SUM(f) FROM atable GROUP BY d, e HAVING SUM(f) > 10
/* in the next SELECT, a UNION is performed on two selects from the same table */
```

```
SELECT d, e, f FROM atable WHERE d = 3 UNION SELECT a, b, c FROM atable WHERE a = 30
/* in the next SELECT, ordering is performed */
SELECT (a + e) / f AS calc, f AS div FROM atable WHERE a + b = c ORDER BY calc DESC, div NULLS
LAST
/* in the next SELECT, slicing is performed after ordering */
SELECT * FROM atable WHERE a + b = c ORDER BY a FETCH 5 ROWS ONLY
```

The next sections discuss various types of tables and operations involved in data access statements.

Select Statement

The SELECT statement itself does not cover all types of data access statements, which may combine multiple SELECT statements. The `<query specification>` is the most common data access statement and begins with the SELECT keyword.

SELECT STATEMENT

select statement (general)

Users generally refer to the SELECT statement when they mean a `<query specification>` or `<query expression>`. If a statement begins with SELECT and has no UNION or other set operations, then it is a `<query specification>`. Otherwise it is a `<query expression>`.

Table

In data access statements, a table can be a database table (or view) or an ephemeral table formed for the duration of the query. Some types of table are `<table primary>` and can participate in joins without the use of extra parentheses. The BNF in the Table Primary section below lists different types of `<table primary>`:

Tables can also be formed by specifying the values that are contained in them:

```
<table value constructor> ::= VALUES <row value expression list>
```

```
<row value expression list> ::= <table row value expression> [ { <comma> <table
row value expression> }... ]
```

In the example below a table with two rows and 3 columns is constructed out of some values:

```
VALUES (12, 14, null), (10, 11, CURRENT_DATE)
```

When a table is used directly in a UNION or similar operation, the keyword TABLE is used with the name:

```
<explicit table> ::= TABLE <table or query name>
```

In the examples below, all rows of the two tables are included in the union. The keyword TABLE is used in the first example. The two examples below are equivalent.

```
TABLE atable UNION TABLE anothertable
SELECT * FROM atable UNION SELECT * FROM anothertable
```

Subquery

A subquery is simply a query expression in brackets. A query expression is usually a complete SELECT statement and is discussed in the rest of this chapter. A scalar subquery returns one row with one column. A row subquery returns one row with one or more columns. A table subquery returns zero or more rows with one or more columns. The distinction between different forms of subquery is syntactic. Different forms are allowed in different contexts. If a scalar subquery

or a row subquery return more than one row, an exception is raised. If a scalar or row subquery returns no row, it is usually treated as returning a NULL. Depending on the context, this has different consequences.

```
<scalar subquery> ::= <subquery>
```

```
<row subquery> ::= <subquery>
```

```
<table subquery> ::= <subquery>
```

```
<subquery> ::= <left paren> <query expression> <right paren>
```

Query Specification

A query specification is also known as a SELECT statement. It is the most common form of <derived table>. A <table expression> is a base table, a view or any form of allowed derived table. The SELECT statement performs projection, naming, computing or aggregation on the rows of the <table expression>.

```
<query specification> ::= SELECT [ DISTINCT | ALL ] <select list> <table expression>
```

```
<select list> ::= <asterisk> | <select sublist> [ { <comma> <select sublist> }... ]
```

```
<select sublist> ::= <derived column> | <qualified asterisk>
```

```
<qualified asterisk> ::= <asterisked identifier chain> <period> <asterisk>
```

```
<asterisked identifier chain> ::= <asterisked identifier> [ { <period> <asterisked identifier> }... ]
```

```
<asterisked identifier> ::= <identifier>
```

```
<derived column> ::= <value expression> [ <as clause> ]
```

```
<as clause> ::= [ AS ] <column name>
```

The qualifier DISTINCT or ALL apply to the results of the SELECT statement after all other operations have been performed. ALL simply returns the rows, while DISTINCT compares the rows and removes the duplicate ones.

Projection is performed by the <select list>.

A single <asterisk> means all columns of the <table expression> are included, in the same order as they appear in the <table expression>. An asterisk qualified by a table name means all the columns of the qualifier table name are included. If an unqualified asterisk is used, then no other items are allowed in the <select list>. When the <table expression> is the direct result of NATURAL or USING joins, the use of <asterisk> includes the columns used for the join before the other columns. A qualified asterisk does not cover the join columns.

A derived column is a <value expression>, optionally named with the <as clause>. A <value expression> can be many things. Common types include: the name of a column in the <table expression>; an expression based on different columns or constant values; a function call; an aggregate function; a CASE WHEN expression.

Table Expression

A table expression is part of the SELECT statement and consists of the FROM clause with optional other clauses that performs selection (of rows) and grouping from the table(s) in the FROM clause.

```

<table expression> ::= <from clause> [ <where clause> ] [ <group by clause> ]
[ <having clause> ]

<from clause> ::= FROM <table reference> [ { <comma> <table reference> }... ]

<table reference> ::= <table primary> | <joined table>

<table primary> ::= <table or query name> [ [ AS ] <correlation name> [ <left
paren> <derived column list> <right paren> ] ]

| <derived table> [ AS ] <correlation name> [ <left paren> <derived column
list> <right paren> ]

| <lateral derived table> [ AS ] <correlation name> [ <left paren> <derived
column list> <right paren> ]

| <collection derived table> [ AS ] <correlation name> [ <left paren> <derived
column list> <right paren> ]

| <table function derived table> [ AS ] <correlation name> [ <left paren>
<derived column list> <right paren> ]

| <parenthesized joined table> [ AS ] <correlation name> [ <left paren> <derived
column list> <right paren> ]

<where clause> ::= WHERE <boolean value expression>

<group by clause> ::= GROUP BY [ <set quantifier> ] <grouping element> [ { <comma>
<grouping element> }... ]

<having clause> ::= HAVING <boolean value expression>

```

The <from clause> contains one or more <table reference> separated by commas. A table reference is often a table or view name or a joined table.

The <where clause> filters the rows of the table in the <from clause> and removes the rows for which the search condition is not TRUE.

Table primary refers to different forms of table reference in the FROM clause.

Table or Query Name

The simplest form of reference is simply a name. This is the name of a table, a view, a transition table in a trigger definition, or a query name specified in the WITH clause of a query expression.

```

<table or query name> ::= <table name> | <transition table name> | <query name>

```

Derived Table

derived table

A query expression that is enclosed in parentheses and returns from zero to many rows is a <table subquery>. In a <derived table> the query expression is self contained and cannot reference the columns of other table references. This is the traditional and most common form of use of a <table subquery>.

```

<derived table> ::= <table subquery>

```

Lateral

LATERAL

When the word LATERAL is used before a <table subquery>, it means the query expression can reference the columns of other table references that go before it.

```
<lateral derived table> ::= LATERAL <table subquery>
```

The use of <lateral derived table> completely transforms the way a query is written. For example, the two queries below are equivalent, but with different forms. The query with LATERAL is evaluated separately for each row of the first table that satisfies the WHERE condition. The example below uses the tables that are created and populated in DatabaseManagerSwing with the "Insert test data" menu option. The first query uses a scalar subquery to compute the sum of invoice values for each customer. The second query is equivalent and uses a join with a LATERAL table.

```
SELECT firstname, lastname, (SELECT SUM(total) FROM invoice WHERE customerid = customer.id) s
FROM customer

SELECT firstname, lastname, a.c FROM customer, LATERAL(SELECT SUM(total) FROM invoice WHERE
customerid = customer.id) a (c)
```

UNNEST

UNNEST

UNNEST is similar to LATERAL, but instead of a query expression, one or more expressions that return an array are used. These expressions are converted into a table which has one column for each expression and contains the elements of the array. If WITH ORDINALITY is used, an extra column that contains the index of each element is added to this table. The number of rows in the table equals the length of the largest arrays. The smaller arrays are padded with NULL values. If an <array value expression> evaluates to NULL, an empty array is used in its place. The array expression can contain references to any column of the table references preceding the current table reference.

```
<collection derived table> ::= UNNEST <left paren> <array value expression>, ...
<right paren> [ WITH ORDINALITY ]
```

The <array value expression> can be the result of a function call. If the arguments of the function call are values from the tables on the left of the UNNEST, then the function is called for each row of table.

In the first example below, UNNEST is used with the built in-function SEQUENCE_ARRAY to build a table containing dates for the last seven days and their ordinal position. In the second example, a select statement returns costs for the last seven days . In the third example, the WITH clause turns the two selects into named subqueries which are used in a SELECT statement that uses a LEFT join.

```
SELECT * FROM UNNEST(SEQUENCE_ARRAY(CURRENT_DATE - 7 DAY, CURRENT_DATE - 1 DAY, 1 DAY)) WITH
ORDINALITY AS T(D, I)

D          I
----- -
2010-07-25 1
2010-07-26 2
2010-07-27 3
2010-07-28 4
2010-07-29 5
2010-07-30 6
2010-07-31 7

CREATE TABLE expenses (item_date DATE, cost DECIMAL(8,2))
--
SELECT item_date, SUM(cost) AS s FROM expenses WHERE item_date >= CURRENT_DATE - 7 DAY GROUP BY
item_date
```

```

ITEM_DATE  S
-----
2010-07-27 100.12
2010-07-29 50.45

WITH costs(i_d, s) AS (SELECT item_date, SUM(cost) AS s FROM expenses WHERE item_date >=
CURRENT_DATE - 7 DAY GROUP BY item_date),
dates(d, i) AS (SELECT * FROM UNNEST(SEQUENCE_ARRAY(CURRENT_DATE - 7 DAY, CURRENT_DATE - 1 DAY,
1 DAY)) WITH ORDINALITY)
SELECT i, d, s FROM dates LEFT OUTER JOIN costs ON dates.d = costs.i_d

I D          S
- - - - -
1 2010-07-25 (null)
2 2010-07-26 (null)
3 2010-07-27 100.12
4 2010-07-28 (null)
5 2010-07-29 50.45
6 2010-07-30 (null)
7 2010-07-31 (null)

```

Table Function Derived Table

Table Function Derived Table

When TABLE is used in this context, the <collection value expression> must be the result of a function call to a built-in function or user-defined function that returns an array or a table. When the function returns an array, this array is converted into a table, similar to the way UNNEST operates. When the function returns a table, the result is a MULTISSET and is used as is.

```
<table function derived table> ::= TABLE <left paren> <collection value
expression> <right paren>
```

Parenthesized Joined Table

A parenthesized joined table is simply a joined table contained in parentheses. Joined tables are discussed below.

```
<parenthesized joined table> ::= <left paren> <parenthesized joined table>
<right paren> | <left paren> <joined table> <right paren>
```

Column Name List

column name list

The column list that is specified for the table reference must contain names that are unique within the list

```
<derived column list> ::= <column name list>
```

```
<column name list> ::= <column name> [ { <comma> <column name> }... ]
```

Joined Table

Joins are operators with two table as the operands, resulting in a third table, called joined table. All join operators are evaluated left to right, therefore, with multiple joins, the table resulting from the first join operator becomes an operand of the next join operator. Parentheses can be used to group sequences of joined tables and change the evaluation order. So if more than two tables are joined together with join operators, the end result is also a joined table. There are different types of join, each producing the result table in a different way.

```

<joined table> ::= <cross join> | <qualified join> | <natural join>

<cross join> ::= <table reference> CROSS JOIN <table factor>

<qualified join> ::= <table reference> | [ <join type> ] JOIN <table reference>
<join specification>

<natural join> ::= <table reference> NATURAL [ <join type> ] JOIN <table factor>

<join specification> ::= <join condition> | <named columns join>

<join condition> ::= ON <search condition>

<named columns join> ::= USING <left paren> <join column list> <right paren>

<join type> ::= INNER | <outer join type> [ OUTER ]

<outer join type> ::= LEFT | RIGHT | FULL

<join column list> ::= <column name list>

```

CROSS JOIN

The simplest form of join is CROSS JOIN. The CROSS JOIN of two tables is a table that has all the columns of the first table, followed by all the columns of the second table, in the original order. Each row of the first table is combined with each row of the second table to fill the rows of the new table. If the rows of each table form a set, then the rows of the CROSS JOIN table form the Cartesian product of the rows of the two table operands.

Conditions are not allowed as part of a cross join, which is simply A CROSS JOIN B. Any conditions in a WHERE clause are later applied to the table resulting from the cross join.

Tables in the FROM CLAUSE separated with commas, are equivalent to cross joins between the tables. Two joined tables separated with a comma, such as A, B, is equivalent to (A) CROSS JOIN (B), which means the joined tables A and B are populated separately before they are joined.

CROSS JOIN is not is not generally very useful, as it returns large result tables unless WHERE conditions are used.

UNION JOIN

The UNION JOIN has limited use in queries. The result table has the same columns as that of CROSS JOIN. Each row of the first table is extended to the right with nulls and added to the new table. Each row of the second table is extended to the left with nulls and added to the new table. The UNION JOIN is expressed as A UNION JOIN B. This should not be confused with A UNION B, which is a set operation. Union join is for special applications and is not commonly used.

JOIN ... ON

The condition join is similar to CROSS JOIN, but a condition is tested for each row of the new table and the row is created only if the condition is true. This form of join is expressed as A JOIN B ON (<search condition>).

Equijoin is a condition join in which the search condition is an equality condition between one or more pairs of columns from the two table. Equijoin is the most commonly used type of join.

```
SELECT a.*, b.* FROM a INNER JOIN b ON a.col_one = b.col_two
```

JOIN ... USING

NATURAL JOIN

Joins with USING or NATURAL keywords joins are similar to an equijoin but they cannot be replaced simply with an equijoin. The new table is formed with the specified or implied shared columns of the two tables, followed by the rest of the columns from each table. In NATURAL JOIN, the shared columns are all the column pairs that have the same name in the first and second table. In JOIN USING, only columns names that are specified by the USING clause are shared. The joins are expressed as A NATURAL JOIN B, and A JOIN B USING (<comma separated column name list>).

The columns of the joined table are formed by the following procedures: In JOIN ... USING the shared columns are added to the joined table in the same order as they appear in the column name list. In NATURAL JOIN the shared columns are added to the joined table in the same order as they appear in the first table. In both forms of join, the non-shared columns of the first table are added in the order they appear in the first table, finally the non-shared columns of the second table are added in the order they appear in the second table.

The type of each shared column of the joined table is based on the type of the columns in the original tables. If the original types are not exactly the same, the type of the shared column is formed by type aggregation. Type aggregations selects a type that can represent values of both aggregated types. Simple type aggregation picks one of the types. For example SMALLINT and INTEGER, results in INTEGER, or VARCHAR(10) and VARCHAR(20) results in VARCHAR(20). More complex type aggregation inherits properties from both types. For example DECIMAL(8) and DECIMAL (6,2) results in DECIMAL (8,2).

In the examples below, the rows are joined exactly the same way, but the first query contains a.col_two and b.col_two together with all the rest of the columns of both tables, while the second query returns only one copy of col_two.

```
SELECT * FROM a INNER JOIN b ON a.col_two = b.col_two
SELECT * FROM a INNER JOIN b USING (col_two)
```

OUTER JOIN

LEFT, RIGHT and FULL OUTER JOIN

The three qualifiers can be added to all types of JOIN except CROSS JOIN and UNION JOIN. First the new table is populated with the rows from the original join. If LEFT is specified, all the rows from the first table that did not make it into the new table are extended to the right with nulls and added to the table. If RIGHT is specified, all the rows from the second table that did not make it into the new table are extended to the left with nulls and added to the table. If FULL is specified, the addition of leftover rows is performed from both the first and the second table. These forms are expressed by prefixing the join specification with the given keyword. For example A LEFT OUTER JOIN B ON (<search condition>) or A NATURAL FULL OUTER JOIN B or A FULL OUTER JOIN B USING (<comma separated column name list>).

```
SELECT a.*, b.* FROM a LEFT OUTER JOIN b ON a.col_one = b.col_two
```

Selection

Despite the name, selection has nothing to do with the list of columns in a SELECT statement. In fact, it refers to the search condition used to limit the rows that from a result table (selection of rows, not columns). In SQL, simple selection is expressed with a WHERE condition appended to a single table or a joined table. In some cases, this method of selection is the only method available. For example in DELETE and UPDATE statements. But when it is possible to perform the selection with join conditions, this is the better method, as it results in a clearer expression of the query.

Projection

Projection is selection of the columns from a simple or joined table to form a result table. Explicit projection is performed in the SELECT statement by specifying the select column list. Some form of projection is also performed in JOIN ... USING and NATURAL JOIN.

The joined table has columns that are formed according to the rules mentioned above. But in many cases, not all the columns are necessary for the intended operation. If the statement is in the form, `SELECT * FROM <joined table>`, then all the columns of <joined table> are returned. But normally, the columns to be returned are specified after the `SELECT` keyword, separated from each other with commas.

Computed Columns

In the select list, it is possible to use expressions that reference any columns of <joined table>. Each of these expressions forms a computed column. It is computed for each row of the result table, using the values of the columns of the <joined table> for that row.

Naming

Naming is used to hide the original names of tables or table columns and to replace them with new names in the scope of the query. Naming is also used for defining names for computed columns.

Without explicit naming, the name of a column is a predefined name. If the column is a column of a table, or is a named parameter, the name is of the table column or parameter is used. Otherwise it is generated by the database engine. HyperSQL generates column names such as C1, C2, etc. As generated naming is implementation defined according to the SQL Standard, it is better to explicitly name the computed and derived columns in your applications.

Naming in Joined Table

Naming is performed by adding a new name after a table's real name and by adding a list of column names after the new table name. Both table naming and column naming are optional, but table naming is required for column naming. The expression `A [AS] X (<comma separated column name list>)` means table A is used in the query expression as table X and its columns are named as in the given list. The original name A, or its original column names, are not visible in the scope of the query. The BNF is given below. The <correlation name> can be the same or different from the name of the table. The <derived column list> is a comma separated list of column names. The degree of this list must be equal to the degree of the table. The column names in the list must be distinct. They can be the same or different from the names of the table's columns.

```
<table or query name> [ [ AS ] <correlation name> [ <left paren> <derived column list> <right paren> ] ]
```

In the examples below, the columns of the original tables are named (a, b, c, d, e, f). The two queries are equivalent. In the second query, the table and its columns are renamed and the new names are used in the WHERE clauses:

```
CREATE TABLE atable (a INT, b INT, c INT, d INT, e INT, f INT);
SELECT d, e, f FROM atable WHERE a + b = c
SELECT x, y, z FROM atable AS t (u, v, w, x, y, z) WHERE u + v = w
```

Naming in Select List

Naming in the `SELECT` list logically takes place after naming in the joined table. The new names for columns are not visible in the immediate query expression or query expression. They become visible in the `ORDER BY` clause and in the result table that is returned to the user. Or if the query expression is used as a derived table in an enclosing query expression.

In the example below, the query is on the same table but with column renaming in the Select list. The new names are used in the `ORDER BY` clause:

```
SELECT x + y AS xysum, y + z AS yzsum FROM atable AS t (u, v, w, x, y, z) WHERE u + v = w ORDER BY xysum, yzsum
```

If the names `xysum` or `yzsum` are not used, the computed columns cannot be referenced in the `ORDER BY` list.

Name Resolution

In a joined table, if a column name appears in tables on both sides then any reference to the name must use the table name in order to specify which table is being referred to.

Grouping Operations

Grouping Operations

Grouping results in the elimination of duplicate rows. A grouping operation is performed after the operations discussed above. A simple form of grouping is performed by the use of `DISTINCT` after `SELECT`. This eliminates all the duplicate rows (rows that have the same value in each of their columns when compared to another row). The other form of grouping is performed with the `GROUP BY` clause. This form is usually used together with aggregation.

GROUP BY

```
<group by clause> ::= GROUP BY <grouping element> [ { <comma> <grouping element> }... ]
```

```
<grouping element> ::= <column reference> [ <collate clause> ]
```

The `<group by clause>` is a comma separated list of columns of the table in the `<from clause>` or expressions based on the columns.

When a `<group by clause>` is used, only the columns used in the `<group by clause>` or expressions used there, can be used in the `<select list>`, together with any `<aggregate function>` on other columns. In other words, the column names or expressions listed in the `GROUP BY` clause dictate what can be used in the `<select list>`. After the rows of the table formed by the `<from clause>` and the `<where clause>` are finalised, the grouping operation groups together the rows that have the same values in the columns of the `<group by clause>`. Then any `<aggregate function>` in the `<select list>` is performed on each group, and for each group, a row is formed that contains the values of the columns of the `<group by clause>` and the values returned from each `<aggregate function>`.

When the type of `<column reference>` is character string, the `<collate clause>` can be used to specify the collation used for grouping the rows. For example, a collation that is not case sensitive can be used, or a collation for a different language than the original collation of the column.

In the first example below, a simple column reference is used in `GROUP BY`, while in the second example, an expression is used.

```
CREATE TABLE atable (a INT, b INT, c INT, d INT, e INT, f INT);
SELECT d, e, f FROM atable WHERE a + b = c GROUP BY d, e, f
SELECT d + e, SUM(f) FROM atable WHERE a + b = c GROUP BY d + e HAVING SUM(f) > 2 AND d + e > 4
```

A `<having clause>` filters the rows of the table that is formed after applying the `<group by clause>` using its search condition. The search condition must be an expression based on the expressions in the `GROUP BY` list or the aggregate functions used.

DISTINCT

```
SELECT DISTINCT
```

When the keyword `DISTINCT` is used after `SELECT`, it works as a shortcut replacement for a simple `GROUP BY` clause. The expressions in the `SELECT` list are used directly as the `<group by clause>`. The following examples of `SELECT DISTINCT` and `SELECT` with `GROUP BY` are equivalent.

```
SELECT DISTINCT d, e + f FROM atable WHERE a + b = c
SELECT d, e + f FROM atable WHERE a + b = c GROUP BY d, e + f
```

Aggregation

Aggregation is an operation that computes a single value from the values of a column over several rows. The operation is performed with an aggregate function. The simplest form of aggregation is counting, performed by the COUNT function.

Other common aggregate functions return the maximum, minimum and average value among the values in different rows. Aggregate functions were discussed earlier in this chapter.

Set Operations

Set and Multiset Operations

While join operations generally result in laterally expanded tables, SET and COLLECTION operations are performed on two tables that have the same degree and result in a table of the same degree. The SET operations are UNION, INTERSECT and EXCEPT (difference). When each of these operations is performed on two tables, the collection of rows in each table and in the result is reduced to a set of rows, by eliminating duplicates. The set operations are then performed on the two tables, resulting in the new table which itself is a set of rows. Collection operations are similar but the tables are not reduced to sets before or after the operation and the result is not necessarily a set, but a collection of rows.

The set operations on two tables A and B are: A UNION [DISTINCT] B, A INTERSECT [DISTINCT] B and A EXCEPT [DISTINCT] B. The result table is formed in the following way: The UNION operation adds all the rows from A and B into the new table, but avoids copying duplicate rows. The INTERSECT operation copies only those rows from each table that also exist in the other table, but avoids copying duplicate rows. The EXCEPT operation copies those rows from the first table which do not exist in the second table, but avoids copying duplicate rows.

The collection operations are similar to the set operations, but can return duplicate rows. They are A UNION ALL B, A INTERSECT ALL B and A EXCEPT ALL B. The UNION ALL operation adds all the rows from A and B into the new table. The INTERSECT operation copies only those rows from each table that also exist in the other table. If n copies of a row exists in one table, and m copies in the other table, the number of copies in the result table is the smaller of n and m. The EXCEPT operation copies those rows from the first table which do not exist in the second table. If n copies of a row exist in the first table and m copies in the second table the number of copies in the result table is n-m, or if n < m, then zero.

With Clause and Recursive Queries

The optional WITH clause can be used in a query expression. The WITH clause lists one or more named ephemeral tables that can be referenced in the query expression body. The ephemeral tables are created and populated before the rest of the query expression is executed. Their contents do not change during the execution of the <query expression body>.

```
<with clause> ::= WITH [ RECURSIVE ] <with list>
```

```
<with list> ::= <with list element> [ { <comma> <with list element> }... ]
```

```
<with list element> ::= <query name> [ <left paren> <with column list> <right paren> ] AS <left paren> <query expression> <right paren>
```

```
<with column list> ::= <column name list>
```

An example of the use of the WITH clause is given above under UNNEST. The <query expression> in the WITH clause is evaluated once and its result table can be referenced in the body of the main <query expression body> using the specified <query name>.

The RECURSIVE keyword changes the way the elements of the <with list> are interpreted. The <query expression> contained in the <with list element> must be the UNION or UNION ALL of two <query expression body> elements (simple VALUES or SELECT statements). The left element of the UNION is evaluated first and its result becomes the result of the <with list element>. After this step, the current result of the <with list element> is referenced in the right element (a SELECT statement) of the UNION, the UNION is performed between the result and previous result of the <with list element>, which is enlarged by this operation. The UNION operation is performed again and again, until the result of the <with list element> stops changing. The result of the <with list element> is now complete and is later used in the execution of the <query expression body>. When RECURSIVE is used, the <with column list> must be defined.

HyperSQL limits recursion to 265 rounds. If this is exceeded, an error is raised.

A trivial example of a recursive query is given below. Note the first column GEN. For example, if each row of the table represents a member of a family of dogs, together with its parent, the first column of the result indicates the calculated generation of each dog, ranging from first to fourth generation.

```
CREATE TABLE pptree (pid INT, id INT);
INSERT INTO pptree VALUES (NULL, 1) ,(1,2), (1,3),(2,4),(4,5),(3,6),(3,7);

WITH RECURSIVE tree (gen, par, child) AS (
  VALUES(1, CAST(null as int), 1)
  UNION
  SELECT gen + 1, pid, id FROM pptree, tree WHERE pid = child
) SELECT * FROM tree;
```

GEN	PAR	CHILD
1	(null)	1
2	1	2
2	1	3
3	2	4
3	3	6
3	3	7
4	4	5

if recursive queries become complex they also become very difficult to develop and debug. HyperSQL provides an alternative to this with user-defined SQL functions which return tables. Functions can perform any complex, repetitive task with better control, using loops, variables and, if necessary, recursion.

Query Expression

A query expression consists of an optional WITH clause and a query expression body. The optional WITH clause lists one or more named ephemeral tables that can be referenced, just like the database tables in the query expression body.

```
<query expression> ::= [ <with clause> ] <query expression body>
```

A query expression body refers to a table formed by using UNION and other set operations. The query expression body is evaluated from left to right and the INTERSECT operator has precedence over the UNION and EXCEPT operators. A simplified BNF is given below:

```
<query expression body> ::= <query term> | <query expression body> UNION |
EXCEPT [ ALL | DISTINCT ] [ <corresponding spec> ] <query term>
```

```
<query term> ::= <query primary> | <query term> INTERSECT [ ALL | DISTINCT ]
[ <corresponding spec> ] <query term>
```

```
<query primary> ::= <simple table> | <left paren> <query expression body> [ <order
by clause> ] [ <result offset clause> ] [ <fetch first clause> ] <right paren>
```

```
<simple table> ::= <query specification> | <table value constructor> | <explicit table>
<explicit table> ::= TABLE <table or query name>
```

```
<corresponding spec> ::= CORRESPONDING [ BY <left paren> <column name list>
<right paren> ]
```

A <query term> and a <query primary> can be a SELECT statement, an <explicit table>, or a <table value constructor>.

The CORRESPONDING clause is optional. If it is not specified, then the <query term> and the <query primary> must have the same number of columns. If CORRESPONDING is specified, the two sides need not have the same number of columns. If no column list is used with CORRESPONDING, then all the column names that are common in the tables on two sides are used in the order in which they appear in the first table. If a columns list is used, it allows you to select only some columns of the tables on the left and right side to create the new table. In the example below the columns named u and v from the two SELECT statements are used to create the UNION table.

```
SELECT * FROM atable UNION CORRESPONDING BY (u, v) SELECT * FROM anothertable
```

The type of each column of the query expression is determined by combining the types of the corresponding columns from the two participating tables.

Ordering

When the rows of the result table have been formed, it is possible to specify the order in which they are returned to the user. The ORDER BY clause is used to specify the columns used for ordering, and whether ascending or descending ordering is used. It can also specify whether NULL values are returned first or last.

```
SELECT x + y AS xysum, y + z AS yzsum FROM atable AS t (u, v, w, x, y, z) WHERE u + v = w ORDER
BY xysum NULLS LAST, yzsum NULLS FIRST
```

The ORDER BY clause specifies one or more <value expressions>. The list of rows is sorted according to the first <value expression>. When some rows are sorted equal then they are sorted according to the next <value expression> and so on.

```
<order by clause> ::= ORDER BY <sort specification> [ { <comma> <sort specification> }... ]
```

```
<sort specification> ::= <value expression> [ <collate clause> ] [ ASC | DESC ]
[ NULLS FIRST | NULLS LAST ]
```

The defaults are ASC and NULLS FIRST. Two database properties SQL NULLS FIRST and SQL NULLS ORDER can be modified to change the default behaviour.

A collation is used for columns of an ORDER BY expression that are of the type CHAR or VARCHAR. If a <collate clause> is not specified then the collation of the column, or the default collation of the database is used.

The default collation for a database is ASCII, with lowercase letters sorted after all uppercase letters. The example below shows the effect of collation on an ordered list.

```
-- default collation collation for the database is ASCII
SELECT id, lastname FROM customer ORDER BY lastname
ID LASTNAME
-- -----
40 Clancy
36 King
35 White
6 king
```

```
-- a language collation is used, it treats king and King as adjacent entries
SELECT id, lastname FROM customer ORDER BY lastname COLLATE "English"
ID LASTNAME
-- -----
40 Clancy
6 king
36 King
35 White
```

In the above example, if the LASTNAME column is itself defined in the table definition with COLLATE "English", then the COLLATE clause is not necessary in the ORDER BY expression.

An ORDER BY operation can sometimes be optimised by the engine when it can use the same index for accessing the table data and ordering. Optimisation can happen both with DESC + NULLS LAST and ASC + NULLS FIRST.

sort specification list

sort specification list

```
<sort specification list> ::= <value expression> [ASC | DESC] [NULLS FIRST |
NULLS LAST]
```

Specify a sort order. A sort operation is performed on the result of a <query expression> or <query specification> and sorts the result according to one or more <value expression>. The <value expression> is usually a single column of the result, but in some cases it can be a column of the <table expression> that is not used in the select list. The default is ASC and NULLS FIRST.

Slicing

A different form of limiting the rows can be performed on the result table after it has been formed according to all the other operations (selection, grouping, ordering etc.). This is specified by the FETCH ... ROWS and OFFSET clauses of a SELECT statement. In this form, the specified OFFSET rows are removed from start of the table, then up to the specified FETCH rows are kept and the rest of the rows are discarded.

```
<result offset clause> ::= OFFSET <offset row count> { ROW | ROWS }
```

```
<fetch first clause> ::= FETCH { FIRST | NEXT } [ <fetch first row count> ]
{ ROW | ROWS } ONLY [ USING INDEX ]
```

```
<limit clause> ::= LIMIT <fetch first row count> [ USING INDEX ]
```

A slicing operation takes the result set that has been already processed and ordered. It then discards the specified number of rows from the start of the result set and returns the specified number of rows after the discarded rows. The <offset row count> and <fetch first row count> can be constants, dynamic variables, routine parameters, or routine variables. The type of the constants must be INTEGER.

```
SELECT a, b FROM atable WHERE d < 5 ORDER BY absum OFFSET 3 FETCH 2 ROWS ONLY
SELECT a, b FROM atable WHERE d < 5 ORDER BY absum OFFSET 3 LIMIT 2 /* alternative keyword */
```

When the FETCH keyword is used, the specified number of rows must be at least 1, otherwise an error is returned. This behaviour is consistent with the SQL Standard. When the LIMIT keyword is used, the specified number of rows can be zero, which means return all rows (no LIMIT). In MySQL and PostgreSQL syntax modes, zero limit means no rows (empty result).

If there is an index on all the columns specified in the ORDER BY clause, it is normally used for slicing. In some queries, an index on another column may take precedence because it is used to process the WHERE condition. It is possible to add USING INDEX to the end of the slicing clause to force the use of the index for ordering and slicing, instead of the index for the WHERE condition.

Data Change Statements

Delete Statement

DELETE FROM

delete statement: searched

```
<delete statement: searched> ::= DELETE FROM <target table> [ [ AS ] <correlation name> ] [ WHERE <search condition> ][ LIMIT <fetch first row count> ]
```

Delete rows of a table. The search condition is a `<boolean value expression>` that is evaluated for each row of the table. If the condition is true, the row is deleted. If the condition is not specified, all the rows of the table are deleted. In fact, an implicit SELECT is performed in the form of `SELECT * FROM <target table> [WHERE <search condition>]` and the selected rows are deleted. When used in JDBC, the number of rows returned by the implicit SELECT is returned as the update count.

If there are FOREIGN KEY constraints on other tables that reference the subject table, and the FOREIGN KEY constraints have referential actions, then rows from those other tables that reference the deleted rows are either deleted, or updated, according to the specified referential actions.

The LIMIT clause, or alternatively the ROWNUM() function in the WHERE clause, can be used to limit the number of rows that are deleted. This is useful when a very large number of rows needs to be deleted. In this situation, you can perform the operation in chunks and commit after each chunk to reduce memory usage and the total time of the operation.

In the second example below the rows that have the maximum value for column A are deleted;

```
DELETE FROM T WHERE C > 5
DELETE FROM T AS TT WHERE TT.A = (SELECT MAX(A) FROM T)
```

Truncate Statement

TRUNCATE TABLE

truncate table statement

```
<truncate table statement> ::= TRUNCATE TABLE <target table> [ <identity column restart option> ] [ <truncate options> ]
```

```
<identity column restart option> ::= CONTINUE IDENTITY | RESTART IDENTITY
```

```
<truncate options> ::= AND COMMIT [ NO CHECK ]
```

Delete all rows of a table without firing its triggers. This statement can only be used on base tables (not views). If the table is referenced in a FOREIGN KEY constraint defined on another table, the statement causes an exception. Triggers defined on the table are not executed with this statement. The default for `<identity column restart option>` is `CONTINUE IDENTITY`. This means no change to the IDENTITY sequence of the table. If `RESTART IDENTITY` is specified, then the sequence is reset to its start value.

TRUNCATE is faster than ordinary DELETE. The TRUNCATE statement is an SQL Standard data change statement, therefore it is performed under transaction control and can be rolled back if the connection is not in the auto-commit mode.

HyperSQL also supports the optional AND COMMIT and NO CHECK options. If AND COMMIT is used, then the transaction is committed with the execution of the TRUNCATE statement. The action cannot be rolled back. If

the additional NO CHECK option is also specified, then the TRUNCATE statement is executed even if the table is referenced in a FOREIGN KEY constraint defined on another, non-empty table. This form of TRUNCATE is faster than the default form and does not use much memory.

TRUNCATE SCHEMA

truncate schema statement

```
<truncate schema statement> ::= TRUNCATE SCHEMA <target schema> [ <identity
column restart option> ] AND COMMIT [ NO CHECK ]
```

Performs the equivalent of a TRUNCATE TABLE ... AND COMMIT on all the table in the schema. If the additional NO CHECK option is also specified, then the TRUNCATE statement is executed even if any of the tables in the schema is referenced in a FOREIGN KEY constraint defined on a non-empty table in a different schema.

If RESTART IDENTITY is specified, all table IDENTITY sequences and all SEQUENCE objects in the schema are reset to their start values.

Use of this statement requires schema ownership or administrative privileges.

Insert Statement

INSERT INTO

insert statement

```
<insert statement> ::= INSERT INTO <target table> <insert columns and source>

<insert columns and source> ::= <from subquery> | <from constructor> | <from
default>

<from subquery> ::= [ <left paren> <insert column list> <right paren> ]
[ <override clause> ] <query expression>

<from constructor> ::= [ <left paren> <insert column list> <right paren> ]
[ <override clause> ] <contextually typed table value constructor>

<override clause> ::= OVERRIDING USER VALUE | OVERRIDING SYSTEM VALUE

<from default> ::= DEFAULT VALUES

<insert column list> ::= <column name list>
```

Insert new rows in a table. An INSERT statement inserts one or more rows into the table.

The special form, INSERT INTO <target table> DEFAULT VALUES can be used with tables which have a default value for each column.

With the other forms of INSERT, the optional (<insert column list>) specifies to which columns of the table the new values are assigned.

In one form, the inserted values are from a <query expression> and all the rows that are returned by the <query expression> are inserted into the table. If the <query expression> returns no rows, nothing is inserted.

In the other form, a comma separated list of values called <contextually typed table value constructor> is used to insert one or more rows into the table. This list is contextually typed, because the keywords NULL and DEFAULT can be used for the values that are assigned to each column of the table. The keyword DEFAULT

means the default value of the column and can be used only if the target column has a default value or is an IDENTITY or GENERATED column of the table.

The `<override clause>` must be used when a value is explicitly assigned to a column that has been defined as GENERATED ALWAYS AS IDENTITY. The clause, `OVERRIDE SYSTEM VALUE` means the provided values are used for the insert, while `OVERRIDING USER VALUE` means the provided values are simply ignored and the values generated by the system are used instead.

An array can be inserted into a column of the array type by using literals, by specifying a parameter in a prepared statement or an existing array returned by query expression. The last example below inserts an array.

The rows that are inserted into the table are checked against all the constraints that have been declared on the table. The whole INSERT operation fails if any row fails to inserted due to constraint violation. Examples:

```
CREATE TABLE T (A INTEGER GENERATED BY DEFAULT AS IDENTITY, B INTEGER DEFAULT 2)
INSERT INTO T DEFAULT VALUES /* all columns of T have DEFAULT clauses */
INSERT INTO T (SELECT * FROM Z) /* table Z has the same columns as table T */
INSERT INTO T (A,B) VALUES ((1,2),(3,NULL), (DEFAULT,6)) /* three rows are inserted into table T */
ALTER TABLE T ADD COLUMN D VARCHAR(10) ARRAY /* an ARRAY column is added */
INSERT INTO T VALUES DEFAULT, 3, ARRAY['hot','cold']
```

If the table contains an IDENTITY column, the value for this column for the last row inserted by a session can be retrieved using a call to the IDENTITY() function. This call returns the last value inserted by the calling session. When the insert statement is executed with a JDBC Statement or PreparedStatement method, the getGeneratedKeys() method of Statement can be used to retrieve not only the IDENTITY column, but also any GENERATED computed column, or any other column. The getGeneratedKeys() returns a ResultSet with one or more columns. This contains one row per inserted row, and can therefore return all the generated columns for a multi-row insert.

There are three methods of specifying which generated keys should be returned. The first method does not specify the columns of the table. With this method, the returned ResultSet will have a column for each column of the table that is defined as GENERATED ... AS IDENTITY or GENERATED ... AS (<expression>). The two other methods require the user to specify which columns should be returned, either by column indexes, or by column names. With these methods, there is no restriction on which columns of the inserted values to be returned. This is especially useful when some columns have a default clause which is a function, or when there are BEFORE triggers on the table that may provide the inserted value for some of the columns.

Update Statement

UPDATE

update statement: searched

```
<update statement: searched> ::= UPDATE <target table> [ [ AS ] <correlation name> ] SET <set clause list> [ WHERE <search condition> ][ LIMIT <fetch first row count> ]
```

Update rows of a table. An UPDATE statement selects rows from the <target table> using an implicit SELECT statement formed in the following manner:

```
SELECT * FROM <target table> [ [ AS ] <correlation name> ] [ WHERE <search condition> ]
```

Then it applies the SET <set clause list> expression to each selected row.

If the implicit SELECT returns no rows, no update takes place. When used in JDBC, the number of rows returned by the implicit SELECT is returned as the update count.

If there are FOREIGN KEY constraints on other tables that reference the subject table, and the FOREIGN KEY constraints have referential actions, then rows from those other tables that reference the updated rows are updated, according to the specified referential actions.

The rows that are updated are checked against all the constraints that have been declared on the table. The whole UPDATE operation fails if any row violates any constraint.

The LIMIT clause, or alternatively the ROWNUM() function in the WHERE clause, can be used to limit the number of rows that are updated. This is useful when a very large number of rows needs to be updated. In this situation, you can perform the operation in chunks and commit after each chunk to reduce memory usage and the total time of the operation.

set clause list

set clause list

```
<set clause list> ::= <set clause> [ { <comma> <set clause> }... ]
```

```
<set clause> ::= <multiple column assignment> | <set target> <equals operator>
<update source>
```

```
<multiple column assignment> ::= <set target list> <equals operator> <assigned
row>
```

```
<set target list> ::= <left paren> <set target> [ { <comma> <set target> }... ]
<right paren>
```

```
<assigned row> ::= <contextually typed row value expression>
```

```
<set target> ::= <column name>
```

```
<update source> ::= <value expression> | <contextually typed value specification>
```

Specify a list of assignments. This is used in UPDATE, MERGE and SET statements to assign values to a scalar or row target.

Apart from setting a whole target to a value, a SET statement can set individual elements of an array to new values. The last example below shows this form of assignment to the array in the column named B.

In the examples given below, UPDATE statements with single and multiple assignments are shown. Note in the third example, a SELECT statement is used to provide the update values for columns A and C, while the update value for column B is given separately. The SELECT statement must return exactly one row. In this example the SELECT statement refers to the existing value for column C in its search condition.

```
UPDATE T SET A = 5 WHERE ...
UPDATE T SET (A, B) = (1, NULL) WHERE ...
UPDATE T SET (A, C) = (SELECT X, Y FROM U WHERE Z = C), B = 10 WHERE ...
UPDATE T SET A = 3, B[3] = 'warm'
```

Merge Statement

MERGE INTO

merge statement

```
<merge statement> ::= MERGE INTO <target table> [ [ AS ] <merge correlation
name> ] USING <table reference> ON <search condition> <merge operation
specification>
```

```

<merge correlation name> ::= <correlation name>

<merge operation specification> ::= <merge when clause>...

<merge when clause> ::= <merge when matched clause> | <merge when not matched
clause>

<merge when matched clause> ::= WHEN MATCHED [ AND <search condition> ] THEN
<merge update or delete specification>

<merge when not matched clause> ::= WHEN NOT MATCHED [ AND <search condition> ]
THEN <merge insert specification>

<merge update specification> ::= UPDATE SET <set clause list>

<merge delete specification> ::= DELETE

<merge insert specification> ::= INSERT [ <left paren> <insert column list>
<right paren> ] [ <override clause> ] VALUES <merge insert value list>

<merge insert value list> ::= <left paren> <merge insert value element>
[ { <comma> <merge insert value element> }... ] <right paren>

<merge insert value element> ::= <value expression> | <contextually typed value
specification>

```

Update rows, deletes rows or insert new rows into the <target table>. The MERGE statement uses a second table, specified by <table reference>, to determine the rows to be updated or inserted. It is possible to use the statement only to update rows, to delete rows or to insert rows, but usually both update and insert are specified.

The <search condition> matches each row of the <table reference> with each row of the <target table>. If the two rows match then the UPDATE clause is used to update the matching row of the target table. Those rows of <table reference> that have no matching rows are then used to insert new rows into the <target table>. Therefore, a MERGE statement can update or delete between 0 and all the rows of the <target table> and can insert between 0 and the number of the rows in <table reference> into the <target table>. If any row in the <target table> matches more than one row in <table reference> a cardinality error is raised. On the other hand, several rows in the <target table> can match a single row in <table reference> without any error. The constraints and referential actions specified on the database tables are enforced the same way as for an update, a delete and an insert statement.

The optional <search condition> in each WHEN clause can be used to filter (reduce) the rows for the particular action.

The MERGE statement can be used with only the WHEN NOT MATCHED clause as a conditional INSERT statement that inserts a row if no existing rows match a condition.

In the first example below, the table originally contains two rows for different furniture. The <table reference> is the (VALUES(1, 'conference table'), (14, 'sofa'), (5, 'coffee table')) expression, which evaluates to a table with 3 rows. When the x value for a row matches an existing row, then the existing row is updated. When the x value does not match, the row is inserted. Therefore one row of table t is updated from 'dining table' to 'conference table', and two rows are inserted into table t. The second example uses a SELECT statement as the source of the values for the MERGE.

In the third example, a new row is inserted into the table only when the primary key for the new row does not exist. This example uses parameters and should be executed as a JDBC PreparedStatement. The parameter is cast as INTEGER because the MERGE statement does not determine the types of values in the USING clause.

```
CREATE TABLE t (id INT PRIMARY KEY, description VARCHAR(100))
INSERT INTO t VALUES (1, 'dining table'), (2, 'deck chair')

MERGE INTO t USING (VALUES(1, 'conference table'), (14, 'sofa'), (5, 'coffee table'))
AS vals(x,y) ON t.id = vals.x
WHEN MATCHED THEN UPDATE SET t.description = vals.y
WHEN NOT MATCHED THEN INSERT VALUES vals.x, vals.y

MERGE INTO t USING (SELECT * FROM tt WHERE acol = 2) AS vals(x,y) ON t.id = vals.x
WHEN MATCHED THEN UPDATE SET t.description = vals.y
WHEN NOT MATCHED THEN INSERT VALUES vals.x, vals.y

MERGE INTO t USING (VALUES(CAST(? AS INT))) AS vals(x) ON t.id = vals.x
WHEN NOT MATCHED THEN INSERT VALUES vals.x, ?
```

Diagnostics and State

HyperSQL supports some SQL statements, expressions, functions and Java methods that report on the most recently executed statement.

The `IDENTITY()` function returns the last inserted identity value for the current session.

The `GET DIAGNOSTICS` statement is supported to a limited extent. The built-in function `DIAGNOSTICS()` is an alternative. These are normally used in SQL/PSM routines to check the result of the last data update operation.

GET DIAGNOSTICS

get diagnostics statement

```
<get diagnostics statement> ::= GET DIAGNOSTICS <simple target value
specification> = ROW_COUNT
```

The `<simple target value specification>` is a session variable, or a routine variable or OUT parameter.

The keyword `ROW_COUNT` specifies the row count returned by the last executed statement. For `INSERT`, `UPDATE`, `DELETE` and `MERGE` statements, this is the number of rows affected by the statement. This is the same value as returned by JDBC `executeUpdate()` methods. For all other statements, zero is returned.

The value of `ROW_COUNT` is stored in the specified target.

In future versions, more options will be supported for diagnostics values.

Chapter 8. SQL-Invoked Routines

Fred Toussi, The HSQL Development Group

\$Revision: 5570 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

SQL-invoked routines are functions and procedures called from SQL. HyperSQL 2.3 supports routines conforming to two parts of the SQL Standard. Routines written in the SQL language are supported in conformance to SQL/PSM (Persistent Stored Modules) specification. Routines written in Java are supported in broad conformance to SQL/JRT specification. In addition, HyperSQL's previous non-standard support for calling Java routines without prior method definition is retained and enhanced in the latest version by extending the SQL/JRT specification.

HyperSQL also supports user-defined aggregate functions written in the SQL language or Java. This feature is an extension to the SQL Standard.

SQL-invoked routines are schema objects. Naming and referencing follows conventions common to all schema objects. The same routine name can be defined in two different schemas and used with schema-qualified references.

A routine is either a procedure or a function.

A function:

- is defined with CREATE FUNCTION
- always returns a single value or a single table
- does not modify the data in the database
- is used as part of an SQL statement
- can have parameters
- can be polymorphic

A procedure:

- is defined with CREATE PROCEDURE
- can return zero to multiple values or result sets
- can modify the data in the database
- is called separately, using the CALL statement
- can have parameters
- can be polymorphic

Definition of routine signature and characteristics, name resolution and invocation are all implemented uniformly for routines written in SQL or Java.

Access to routines can be granted to users with GRANT EXECUTE or GRANT ALL. For example GRANT EXECUTE ON myroutine TO PUBLIC.

Routine Definition

SQL-Invoked Routines, whether PSM or JRT, are defined using a SQL statement with the same syntax. The part that is different is the <routine body> which consists of SQL statements in PSM routines or a reference to a Java method in JRT routines.

Details of Routine definition are discussed in this section. You may start by reading the next two sections which provide several examples before reading this section for the details.

Routine definition has several mandatory or optional clauses. The complete BNF supported by HyperSQL and the remaining clauses are documented in this section.

CREATE FUNCTION

CREATE PROCEDURE

routine definition

Routine definition is similar for procedures and functions. A function definition has the mandatory <returns clause> which is discussed later. The description given so far covers the essential elements of the specification with the BNF given below.

```
<schema procedure> ::= CREATE PROCEDURE <schema qualified routine name> <SQL
parameter declaration list> <routine characteristics> <routine body>
```

```
<schema function> ::= CREATE FUNCTION <schema qualified routine name> <SQL
parameter declaration list> <returns clause> <routine characteristics> <routine
body>
```

Parameter declaration list has been described above. For SQL/JRT routines, the <SQL parameter name> is optional while for SQL/PSM routines, it is required. If the <parameter mode> of a parameter is OUT or INOUT, it must be specified. The BNF is given below:

```
<SQL parameter declaration list> ::= <left paren> [ <SQL parameter declaration>
[ { <comma> <SQL parameter declaration> }... ] ] <right paren>
```

```
<SQL parameter declaration> ::= [ <parameter mode> ] [ <SQL parameter name> ]
<parameter type>
```

```
<parameter mode> ::= IN | OUT | INOUT
```

```
<parameter type> ::= <data type>
```

Return Value and Table Functions

RETURNS

returns clause

The <returns clause> specifies the type of the return value of a function (not a procedure). For all SQL/PSM functions and ordinary SQL/JRT functions, this is simply a type definition which can be a built-in type, a DOMAIN type or a DISTINCT type, or alternatively, a TABLE definition. For example, RETURNS INTEGER.

For a SQL/JRT function, it is possible to define a `<returns table type>` for a Java method that returns a `java.sql.ResultSet` object. Such SQL/JRT functions are called *table functions*. Table functions are used differently from normal functions. A table function can be used in an SQL query expression exactly where a normal table or view is allowed. At the time of invocation, the Java method is called and the returned `ResultSet` is transformed into an SQL table. The column types of the declared `TABLE` must match those of the `ResultSet`, otherwise an exception is raised at the time of invocation.

If a `<returns table type>` is defined for an SQL/PSM function, the following expression is used inside the function to return a table: `RETURN TABLE (<query expression>);` In the example blow, a table with two columns is returned.

```
RETURN TABLE ( SELECT a, b FROM atable WHERE e = 10 );
```

Functions that return a table are designed to be used in `SELECT` statements using the `TABLE` keyword to form a joined table.

When a JDBC `CallableStatement` is used to `CALL` the function, the table returned from the function call is returned and can be accessed with the `getResultSet()` method of the `CallableStatement`.

```
<returns clause> ::= RETURNS <returns type>
```

```
<returns type> ::= <returns data type> | <returns table type>
```

```
<returns table type> ::= TABLE <table function column list>
```

```
<table function column list> ::= <left paren> <table function column list element> [ { <comma> <table function column list element> } ... ] <right paren>
```

```
<table function column list element> ::= <column name> <data type>
```

```
<returns data type> ::= <data type>
```

routine body

routine body

Routine body is either one or more SQL statements or a Java reference. The user that defines the routine by issuing the `CREATE FUNCTION` or `CREATE SCHEMA` command must have the relevant access rights to all tables, sequences, routines, etc. that are accessed by the routine. If another user is given `EXECUTE` privilege on the routine, then there are two possibilities, depending on the `<rights clause>`. This clause refers to the access rights that are checked when a routine is invoked. The default is `SQL SECURITY DEFINER`, which means access rights of the definer are used; therefore no extra checks are performed when the other user invokes the routine. The alternative `SQL SECURITY INVOKER` means access rights on all the database objects referenced by the routine are checked for the invoker. This alternative is not supported by HyperSQL.

```
<routine body> ::= <SQL routine spec> | <external body reference>
```

```
<SQL routine spec> ::= [ <rights clause> ] <SQL routine body>
```

```
<rights clause> ::= SQL SECURITY INVOKER | SQL SECURITY DEFINER
```

SQL routine body

SQL routine body

The routine body of a an SQL routine consists of an statement.

```
<SQL routine body> ::= <SQL procedure statement>
```

EXTERNAL NAME

external body reference

External name specifies the qualified name of the Java method associated with this routine. HyperSQL 2.3 only supports Java methods within the classpath. The `<external Java reference string>` is a quoted string which starts with `CLASSPATH:` and is followed by the Java package, class and method names separated with dots. HyperSQL does not currently support the optional `<Java parameter declaration list>`.

```
<external body reference> ::= EXTERNAL NAME <external Java reference string>
```

```
<external Java reference string> ::= <jar and class name> <period> <Java method name> [ <Java parameter declaration list> ]
```

Routine Characteristics

The `<routine characteristics>` clause covers several sub-clauses

```
<routine characteristics> ::= [ <routine characteristic>... ]
```

```
<routine characteristic> ::= <language clause> | <parameter style clause> | SPECIFIC <specific name> | <deterministic characteristic> | <SQL-data access indication> | <null-call clause> | <returned result sets characteristic> | <savepoint level indication>
```

LANGUAGE

language clause

The `<language clause>` refers to the language in which the routine body is written. It is either SQL or Java. The default is SQL, so JAVA must be specified for SQL/JRT routines.

```
<language clause> ::= LANGUAGE <language name>
```

```
<language name> ::= SQL | JAVA
```

The parameter style is not allowed for SQL routines. It is optional for Java routines and, in HyperSQL, the only value allowed is JAVA.

```
<parameter style> ::= JAVA
```

SPECIFIC NAME

specific name

The `SPECIFIC <specific name>` clause is optional but the engine will create an automatic name if it is not present. When there are several versions of the same routine, the `<specific name>` is used in schema manipulation statements to drop or alter a specific version. The `<specific name>` is a user-defined name. It applies to both functions and procedures. In the examples below, a specific name is specified for each function.

```
CREATE FUNCTION an_hour_before_or_now(t TIMESTAMP)
  RETURNS TIMESTAMP
  NO SQL
  LANGUAGE JAVA PARAMETER STYLE JAVA
  SPECIFIC an_hour_before_or_now_with_timestamp
  EXTERNAL NAME 'CLASSPATH:org.npo.lib.nowLessAnHour'
```

```
CREATE FUNCTION an_hour_before_max (e_type INT)
  RETURNS TIMESTAMP SPECIFIC an_hour_before_max_with_int
  RETURN (SELECT MAX(event_time) FROM atable WHERE event_type = e_type) - 1 HOUR
```

DETERMINISTIC

deterministic characteristic

The `<deterministic characteristic>` clause indicates that a routine is deterministic or not. Deterministic means the routine does not reference random values, external variables, or time of invocation. The default is `NOT DETERMINISTIC`. It is essential to declare this characteristics correctly for an `SQL/JRT` routine, as the engine does not know the contents of the Java code, which could include calls to methods returning random or time sensitive values.

```
<deterministic characteristic> ::= DETERMINISTIC | NOT DETERMINISTIC
```

SQL DATA access

SQL DATA access characteristic

The `<SQL-data access indication>` clause indicates the extent to which a routine interacts with the database or the data stored in the database tables in different schemas (`SQL DATA`).

`NO SQL` means no `SQL` command is issued in the routine body and can be used only for `SQL/JRT` functions.

`CONTAINS SQL` means some `SQL` commands are used, but they do not read or modify the `SQL` data. `READS SQL DATA` and `MODIFIES SQL DATA` are self explanatory.

A `CREATE PROCEDURE` definition can use `MODIFIES SQL DATA`. This is not allowed in `CREATE FUNCTION`. Note that a `PROCEDURE` or a `FUNCTION` may have internal tables or return a table which is populated by the routine's statements. These tables are not considered `SQL DATA`, therefore there is no need to specify `MODIFIES SQL DATA` for such routines.

```
<SQL-data access indication> ::= NO SQL | CONTAINS SQL | READS SQL DATA |
MODIFIES SQL DATA
```

NULL INPUT

null call clause

Null Arguments

The `<null-call clause>` is used only for functions. If a function returns `NULL` when any of the calling arguments is null, then by specifying `RETURNS NULL ON NULL INPUT`, calls to the function are known to be redundant and do not take place when an argument is null. This simplifies the coding of the `SQL/JRT` Java methods and improves performance at the same time.

```
<null-call clause> ::= RETURNS NULL ON NULL INPUT | CALLED ON NULL INPUT
```

SAVEPOINT LEVEL

transaction impact

The `<savepoint level indication>` is used only for procedures and refers to the visibility of existing savepoints within the body of the procedure. If `NEW SAVEPOINT LEVEL` is specified, savepoints that have been declared prior to calling the procedure become invisible within the body of the procedure. HyperSQL's implementation accepts only `NEW SAVEPOINT LEVEL`.

```
<savepoint level indication> ::= NEW SAVEPOINT LEVEL | OLD SAVEPOINT LEVEL
```

DYNAMIC RESULT SETS

returned result sets characteristic

The `<returned result sets characteristic>` is used with SQL/PSM and SQL/JRT procedures (not with functions). The maximum number of result sets that a procedure may return can be specified with the clause below. The default is zero. If you want your procedure to return result sets, you must specify the maximum number of result sets that your procedure may return. Details are discussed in the next sections.

```
<returned result sets characteristic> ::= DYNAMIC RESULT SETS <maximum returned result sets>
```

SQL Language Routines (PSM)

The PSM (Persistent Stored Module) specification extends the SQL language with structures and control statements such as conditional and loop statements. Both SQL Function and SQL procedure bodies use the same syntax, with minor exceptions.

The routine body is a SQL statement. In its simplest form, the body is a single SQL statement. A simple example of a function is given below:

```
CREATE FUNCTION an_hour_before (t TIMESTAMP)
  RETURNS TIMESTAMP
  RETURN t - 1 HOUR
```

An example of the use of the function in an SQL statement is given below:

```
SELECT an_hour_before(event_timestamp) AS notification_timestamp, event_name FROM events;
```

A simple example of a procedure is given below:

```
CREATE PROCEDURE new_customer(firstname VARCHAR(50), lastname VARCHAR(50))
  MODIFIES SQL DATA
  INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP)
```

The procedure inserts a row into an existing table with the definition given below:

```
CREATE TABLE customers(id INTEGER GENERATED BY DEFAULT AS IDENTITY, firstname VARCHAR(50),
  lastname VARCHAR(50), added TIMESTAMP);
```

An example of the use of the procedure is given below:

```
CALL new_customer('JOHN', 'SMITH');
```

The routine body is often a compound statement. A compound statement can contain one or more SQL statements, which can include control statements, as well as nested compound statements.

Please note carefully the use of `<semicolon>`, which is required at the end of some statements but not accepted at the end of others.

Advantages and Disadvantages

SQL Language Routines (PSM) have certain advantages over Java Language Routines (SQL/JRT) and a couple of disadvantages.

- SQL language routines (PSM) do not rely on custom Java classes to be present on the classpath. The databases that use them are therefore more portable.
- For a routine that accesses SQL DATA, all the SQL statements in an SQL routine are known and monitored by the engine. The engine will not allow a table, routine or sequence that is referenced in an SQL routine to be dropped, or its structure modified in a way that will break the routine execution. The engine does not keep this information about a Java routine.
- Because the statements in an SQL routine are known to the engine, the execution of an SQL routine locks all the database objects it needs to access before the actual execution. With Java routines, locks are obtained during execution and this may cause additional delays in multi threaded access to the database.
- For routines that do not access SQL DATA, Java routines (SQL/JRT) may be faster if they perform extensive calculations.
- Only Java routines can access external programs and resources directly.

Routine Statements

The following SQL Statements can be used only in routines. These statements are covered in this section.

<handler declaration>

<table variable declaration>

<variable declaration>

<declare cursor>

<assignment statement>

<compound statement>

<case statement>

<if statement>

<while statement>

<repeat statement>

<for statement>

<loop statement>

<iterate statement>

<leave statement>

<signal statement>

<resignal statement>

<return statement>

<select statement: single row>

<open statement>

The following SQL Statements can be used in procedures but not in generally in functions (they can be used in functions only to change the data in a local table variable) . These statements are covered in other chapters of this Guide.

<call statement>

<delete statement>

<insert statement>

<update statement>

<merge statement>

As shown in the examples below, the formal parameters and the variables of the routine can be used in statements, similar to the way a column reference is used.

Compound Statement

A compound statement is enclosed in a BEGIN / END block with optional labels. It can contain one or more <SQL variable declaration>, <declare cursor> or <handler declaration> before at least one SQL statement. The BNF is given below:

```
<compound statement> ::= [ <beginning label> <colon> ] BEGIN [[NOT] ATOMIC]
[ {<SQL variable declaration> <semicolon>} ... ]
[ {<declare cursor> <semicolon>} ... ]
[ {<handler declaration> <semicolon>} ... ]
{<SQL procedure statement> <semicolon>} ...
END [ <ending label> ]
```

An example of a simple compound statement body is given below. It performs the common task of inserting related data into two table. The IDENTITY value that is automatically inserted in the first table is retrieved using the IDENTITY() function and inserted into the second table. Other examples show more complex compound statements.

```
CREATE PROCEDURE new_customer(firstname VARCHAR(50), lastname VARCHAR(50), address
VARCHAR(100))
MODIFIES SQL DATA
BEGIN ATOMIC
  INSERT INTO customers VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
  INSERT INTO addresses VALUES (DEFAULT, IDENTITY(), address);
END
```

Table Variables

A <table variable declaration> defines the name and columns of a local table, that can be used in the routine body. The table cannot have constraints. Table variable declarations are made before scalar variable declarations.

```
BEGIN ATOMIC
  DECLARE TABLE temp_table (col_a INT, col_b VARCHAR(20);
  DECLARE temp_id INTEGER;
  -- more statements
```

```
END
```

Variables

A `<variable declaration>` defines the name and data type of the variable and, optionally, its default value. In the next example, a variable is used to hold the `IDENTITY` value. In addition, the formal parameters of the procedure are identified as input parameters with the use of the optional `IN` keyword. This procedure does exactly the same job as the procedure in the previous example.

```
CREATE PROCEDURE new_customer(IN firstname VARCHAR(50), IN lastname VARCHAR(50), IN address
VARCHAR(100))
  MODIFIES SQL DATA
  BEGIN ATOMIC
    DECLARE temp_id INTEGER;
    INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
    SET temp_id = IDENTITY();
    INSERT INTO ADDRESSES VALUES (DEFAULT, temp_id, address);
  END
```

The BNF for variable declaration is given below:

DECLARE variable

SQL variable declaration

```
<SQL variable declaration> ::= DECLARE <variable name list> <data type> [DEFAULT
<default value>]
```

```
<variable name list> ::= <variable name> [ { <comma> <variable name> }... ]
```

Examples of variable declaration are given below. Note that in a `DECLARE` statement with multiple comma-separated variable names, the type and the default value applies to all the variables in the list:

```
BEGIN ATOMIC
  DECLARE temp_zero DATE;
  DECLARE temp_one, temp_two INTEGER DEFAULT 2;
  DECLARE temp_three VARCHAR(20) DEFAULT 'no name';
  -- more statements ...
  SET temp_zero = DATE '2010-03-18';
  SET temp_two = 5;
  -- more statements ...
END
```

Cursors

A `<declare cursor>` statement is used to declare a `SELECT` statement. The current usage of this statement in HyperSQL 2.3 is exclusively to return a result set from a procedure. The result set is returned to the JDBC `CallableStatement` object that calls the procedure. The `getResultSet()` method of `CallableStatement` is then used to retrieve the JDBC `ResultSet`.

In the `<routine definition>`, the `DYNAMIC RESULT SETS` clause must be used to specify a value above zero. The `DECLARE CURSOR` statement is used after any variable declaration in compound statement block. The `SELECT` statement should be followed with `FOR READ ONLY` to avoid possible error messages. The `<open statement>` is then executed for the cursor at the point where the result set should be populated.

After the procedure is executed with a JDBC `CallableStatement` `execute()` method, all the result sets that were opened are returned to the JDBC `CallableStatement`.

Calling `getResultSet()` will return the first `ResultSet`. When there are multiple result sets, the `getMoreResults()` method of the `Callable` statement is called to move to the next `ResultSet`, before `getResultSet()` is called to return the next `ResultSet`. See the [Data Access and Change](#) chapter on the syntax for declaring the cursor.

```
BEGIN ATOMIC
  DECLARE temp_zero DATE;
  DECLARE result CURSOR WITH RETURN FOR SELECT * FROM INFORMATION_SCHEMA.TABLES FOR READ ONLY;
  -- more statements ...
  OPEN result;
END
```

Handlers

A `<handler declaration>` defines the course of action when an exception or warning is raised during the execution of the compound statement. A compound statement may have one or more handler declarations. These handlers become active when code execution enters the compound statement block and remain active in any sub-block and statement within the block. The handlers become inactive when code execution leaves the block.

In the previous example of the `new_customer` procedure, if an exception is thrown during the execution of either SQL statement, the execution of the compound statement is terminated and the exception is propagated and thrown by the `CALL` statement for the procedure. All changes made by the procedure are rolled back.

A handler declaration can resolve the thrown exception within the compound statement without propagating it, and allow the execution of the compound statement to continue.

In the example below, the `UNDO` handler declaration catches any exception that is thrown during the execution of the compound statement inside the `BEGIN ... END` block. As it is an `UNDO` handler, all the changes to data performed within the compound statement (`BEGIN ... END` block) are rolled back. The procedure then returns without throwing an exception.

```
CREATE PROCEDURE new_customer(IN firstname VARCHAR(50), IN lastname VARCHAR(50), IN address
  VARCHAR(100))
  MODIFIES SQL DATA
  label_one: BEGIN ATOMIC
    DECLARE temp_id INTEGER;
    DECLARE UNDO HANDLER FOR SQLEXCEPTION;
    INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
    SET temp_id = IDENTITY();
    INSERT INTO ADDRESSES VALUES (DEFAULT, temp_id, address);
  END
```

Other types of handler are `CONTINUE` and `EXIT` handlers. A `CONTINUE` handler ignores any exception and proceeds to the next statement in the block. An `EXIT` handler terminates execution without undoing the data changes performed by the previous (successful) statements.

The conditions can be general conditions, or specific conditions.

Among general conditions that can be specified, `SQLEXCEPTION` covers all exceptions, `SQLWARNING` covers all warnings, while `NOT FOUND` covers the not-found condition, which is raised when a `DELETE`, `UPDATE`, `INSERT` or `MERGE` statement completes without actually affecting any row.

Alternatively, one or more specific conditions can be specified (separated with commas) which apply to specific exceptions or warnings or classes or exceptions or warnings. A specific condition is specified with `SQLSTATE <value>`, for example `SQLSTATE 'W_01003'` specifies the warning raised after a SQL statement is executed which contains an aggregate function which encounters a null value during execution. An example is given below which activates the handler when either of the two warnings is raised:

```
DECLARE UNDO HANDLER FOR SQLSTATE 'W_01003', 'W_01004';
```

The BNF for <handler declaration> is given below:

DECLARE HANDLER

declare handler statement

```
<handler declaration> ::= DECLARE {UNDO | CONTINUE | EXIT} HANDLER FOR
{SQLEXCEPTION | SQLWARNING | NOT FOUND} | { SQLSTATE <state value> [, ...]}
[<SQL procedure statement>];
```

A handler declaration may specify an <SQL procedure statement> to be performed when the handler is activated. In the example below the handler performs the UNDO as in the previous example then inserts the (invalid) data into a separate table.

```
CREATE PROCEDURE new_customer(IN firstname VARCHAR(50), IN lastname VARCHAR(50), IN address
VARCHAR(100))
MODIFIES SQL DATA
label_one: BEGIN ATOMIC
DECLARE temp_id INTEGER;
DECLARE UNDO HANDLER FOR SQLEXCEPTION
INSERT INTO invalid_customers VALUES(firstname, lastname, address);
-- last statement is part of the handler
INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
SET temp_id = IDENTITY();
INSERT INTO ADDRESSES VALUES (DEFAULT, temp_id, address);
END
```

The <SQL procedure statement> in the handler declaration is required by the SQL Standard but is optional in HyperSQL. If the execution of the <SQL procedure statement> specified in the handler declaration throws an exception itself, then it is handled by the handlers that are currently active at an enclosing (outer) BEGIN ... END block. The <SQL procedure statement> can itself be a compound statement with its own handlers.

When a handler handles an exception condition such as the general SQLEXCEPTION or some specific SQLSTATE, any changes made by the statement that caused the exception will be rolled back. For example, execution of a single update statement that modifies several rows will not change any row if an exception occurs during the update of one of the rows. The handler action affects the changes made by statements that were executed successfully before the exception occurred.

Actions performed by different types of handler are listed below:

- An UNDO handler rolls back all the data changes within the BEGIN ... END block which contains the handler declaration. The execution of the BEGIN ... END block is considered complete. If an <SQL procedure statement> is specified, it is executed after the roll back.
- A CONTINUE handler does not roll back the data changes. It continues execution as if the last statement was successful. If an <SQL procedure statement> is specified, it is executed before continuing execution.
- An EXIT handler does not roll back the data changes. It aborts the execution of the BEGIN ... END block which contains the handler declaration. The execution of the BEGIN ... END block is considered complete, but unlike the UNDO handler the actions are not rolled back. If an <SQL procedure statement> is specified, it is executed before aborting.

Assignment Statement

The SET statement is used for assignment. It can be used flexibly with rows or single values. The BNF is given below:

```
<assignment statement> ::= <singleton variable assignment> | <multiple variable
assignment>
```

```
<singleton variable assignment> ::= SET <assignment target> <equals operator>
<assignment source>
```

```
<multiple variable assignment> ::= SET (<variable or parameter>, ...) = <row
value expression>
```

In the example below, the result of the `SELECT` is assigned to two `OUT` or `INOUT` arguments. The `SELECT` must return one row. If it returns more than one, an exception is raised. If it returns no row, no change is made to `ARG1` and `ARG2`.

```
SET (arg1, arg2) = (SELECT col1, col2 FROM atable WHERE id = 10);
```

In the example below, the result of a function call is assigned to `VAR1`.

```
SET var1 = SQRT(var2);
```

Select Statement : Single Row

A special form of `SELECT` can also be used for assigning values from a query to one or more arguments or variables. This works similar to a `SET` statement that has a `SELECT` statement as the source.

SELECT : SINGLE ROW

select statement: single row

```
<select statement: single row> ::= SELECT [ <set quantifier> ] <select list>
INTO <select target list> <table expression>
```

```
<select target list> ::= <target specification> [ { <comma> <target
specification> }... ]
```

Retrieve values from a specified row of a table and assign the fields to the specified targets. The example below has an identical effect to the example of `SET` statement given above.

```
SELECT col1, col2 INTO arg1, arg2 FROM atable WHERE id = 10;
```

Formal Parameters

Each parameter of a procedure can be defined as `IN`, `OUT` or `INOUT`. An `IN` parameter is an input to the procedure and is passed by value. The value cannot be modified inside the procedure body. An `OUT` parameter is a reference for output. An `INOUT` parameter is a reference for both input and output. An `OUT` or `INOUT` parameter argument is passed by reference, therefore only a dynamic parameter argument or a variable within an enclosing procedure can be passed for it. The assignment statement is used to assign a value to an `OUT` or `INOUT` parameter.

In the example below, the procedure is declared with an `OUT` parameter. It assigns the auto-generated `IDENTITY` value from the `INSERT` statement to the `OUT` argument.

```
CREATE PROCEDURE new_customer(OUT newid INT, IN firstname VARCHAR(50), IN lastname VARCHAR(50),
IN address VARCHAR(100))
MODIFIES SQL DATA
BEGIN ATOMIC
  DECLARE temp_id INTEGER;
  INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
  SET temp_id = IDENTITY();
  INSERT INTO ADDRESSES VALUES (DEFAULT, temp_id, address);
  SET newid = temp_id;
END
```

In the SQL session, or in the body of another stored procedure, a variable must be assigned to the OUT parameter. After the procedure call, this variable will hold the new identity value that was generated inside the procedure. If the procedure is called directly, using the JDBC CallableStatement interface, then the value of the first, OUT argument can be retrieved with a call to `getInt(1)` after calling the `execute()` method.

In the example below, a session variable, `the_new_id` is declared. After the call to `new_customer`, the value for the identity is stored in the `the_new_id` variable. This is returned via the next CALL statement. Alternatively, `the_new_id` can be used as an argument to another CALL statement.

```
DECLARE the_new_id INT DEFAULT NULL;
CALL new_customer(the_new_id, 'John', 'Smith', '10 Parliament Square');
CALL the_new_id;
```

Iterated Statements

Various iterated statements can be used in routines. In these statements, the `<SQL statement list>` consists of one or more SQL statements. The `<search condition>` can be any valid SQL expression of BOOLEAN type.

LOOP

loop statement

```
<loop statement> ::= [ <beginning label> <colon> ] LOOP <SQL statement list>
END LOOP [ <ending label> ]
```

WHILE

while statement

```
<while statement> ::= [ <beginning label> <colon> ] WHILE <search condition> DO
<SQL statement list> END WHILE [ <ending label> ]
```

REPEAT

repeat statement

```
<repeat statement> ::= [ <beginning label> <colon> ]
REPEAT <SQL statement list> UNTIL <search condition> END REPEAT [ <ending label> ]
```

In the example below, a multiple rows are inserted into a table in a WHILE loop:

```
loop_label: WHILE my_var > 0 DO
  INSERT INTO CUSTOMERS VALUES (DEFAULT, my_var);
  SET my_var = my_var - 1;
  IF my_var = 10 THEN SET my_var = 8; END IF;
  IF my_var = 22 THEN LEAVE loop_label; END IF;
END WHILE loop_label;
```

Iterated FOR Statement

The `<for statement>` is similar to other iterated statement, but it is always used with a cursor declaration to iterate over the rows of the result set of the cursor and perform operations using the values of each row.

FOR

for statement

```
<for statement> ::= [ <beginning label> <colon> ] FOR <query expression> DO <SQL statement list> END FOR [ <ending label> ]
```

The <query expression> is a SELECT statement. When the FOR statement is executed, the query expression is executed first and the result set is formed. Then for each row of the result set, the <SQL statement list> is executed. What is special about the FOR statement is that all the columns of the current row can be accessed by name in the statements in the <SQL statement list>. The columns are read only and cannot be updated. For example, if the column names for the select statement are ID, FIRSTNAME, LASTNAME, then these can be accessed as a variable name. The column names must be unique and not equivalent to any parameter or variable name in scope.

The FOR statement is useful for computing values over multiple rows of the result set, or for calling a procedure for some row of the result set.

In the example below, the procedure uses a FOR statement to iterate over the rows for a customer with lastname equal to name_p. No action is performed for the first row, but for all the subsequent rows, the row is deleted from the table.

Note the following: The result set for the SELECT statement is built only once, before processing the statements inside the FOR block begins. For all the rows of the SELECT statement apart from the first row, the row is deleted from the customer table. The WHERE condition uses the automatic variable id, which holds the customer.id value for the current row of the result set, to delete the row. The procedure updates the val_p argument and when it returns, the val_p represents the total count of rows with the given lastname before the duplicates were deleted.

```
CREATE PROCEDURE test_proc(INOUT val_p INT, IN lastname_p VARCHAR(20))
MODIFIES SQL DATA
BEGIN ATOMIC
  SET val_p = 0;
  for_label: FOR SELECT * FROM customer WHERE lastname = lastname_p DO
    IF val_p > 0 THEN
      DELETE FROM customer WHERE customer.id = id;
    END IF;
    SET val_p = val_p + 1;
  END FOR for_label;
END
```

Conditional Statements

There are two types of CASE ... WHEN statement and the IF ... THEN statement.

CASE WHEN

case when statement

The simple case statement uses a <case operand> as the predicand of one or more predicates. For the right part of each predicate, it specifies one or more SQL statements to execute if the predicate evaluates TRUE. If the ELSE clause is not specified, at least one of the search conditions must be true, otherwise an exception is raised.

```
<simple case statement> ::= CASE <case operand> <simple case statement when clause>... [ <case statement else clause> ] END CASE
```

```
<simple case statement when clause> ::= WHEN <when operand list> THEN <SQL statement list>
```

```
<case statement else clause> ::= ELSE <SQL statement list>
```

A skeletal example is given below. The variable `var_one` is first tested for equality with 22 or 23 and if the test evaluates to TRUE, then the INSERT statement is performed and the statement ends. If the test does not evaluate to TRUE, the next condition test, which is an IN predicate, is performed with `var_one` and so on. The statement after the ELSE clause is performed if none the previous tests returns TRUE.

```
CASE var_one
  WHEN 22, 23 THEN INSERT INTO t_one ...;
  WHEN IN (2, 4, 5) THEN DELETE FROM t_one WHERE ...;
  ELSE UPDATE t_one ...;
END CASE
```

The searched case statement uses one or more search conditions, and for each search condition, it specifies one or more SQL statements to execute if the search condition evaluates TRUE. An exception is raised if there is no ELSE clause and none of the search conditions evaluates TRUE.

```
<searched case statement> ::= CASE <searched case statement when clause>...
[ <case statement else clause> ] END CASE
```

```
<searched case statement when clause> ::= WHEN <search condition> THEN <SQL
statement list>
```

The example below is partly a rewrite of the previous example, but a new condition is added:

```
CASE WHEN var_one = 22 OR var_one = 23 THEN INSERT INTO t_one ...;
  WHEN var_one IN (2, 4, 5) THEN DELETE FROM t_one WHERE ...;
  WHEN var_two IS NULL THEN UPDATE t_one ...;
  ELSE UPDATE t_one ...;
END CASE
```

IF

if statement

The if statement is very similar to the searched case statement. The difference is that no exception is raised if there is no ELSE clause and no search condition evaluates TRUE.

```
<if statement> ::= IF <search condition> <if statement then clause> [ <if
statement elseif clause>... ] [ <if statement else clause> ] END IF
```

```
<if statement then clause> ::= THEN <SQL statement list>
```

```
<if statement elseif clause> ::= ELSEIF <search condition> THEN <SQL statement
list>
```

```
<if statement else clause> ::= ELSE <SQL statement list>
```

Return Statement

The RETURN statement is required and used only in functions. The body of a function is either a RETURN statement, or a compound statement that contains a RETURN statement.

The return value of a FUNCTION can be assigned to a variable, or used inside an SQL statement.

An SQL/PSM function or an SQL/JRT function can return a single result when the function is defined as RETURNS TABLE (..)

To return a table from a SELECT statement, you should use a return statement such as RETURN TABLE(SELECT ...) in an SQL/PSM function. For an SQL/JRT function, the Java method should return a JDBCResultSet instance.

To call a function from JDBC, use a java.sql.CallableStatement instance. The getResultSet () call can be used to access the ResultSet returned from a function that returns a result set. If the function returns a scalar value, the returned result has a single column and a single row which contains the scalar returned value.

RETURN

return statement

```
<return statement> ::= RETURN <return value>
```

```
<return value> ::= <value expression> | NULL
```

Return a value from an SQL function. If the function is defined as RETURNS TABLE, then the value is a TABLE expression such as RETURN TABLE(SELECT ...) otherwise, the value expression can be any scalar expression. In the examples below, the same function is written with or without a BEGIN END block. In both versions, the RETURN value is a scalar expression.

```
CREATE FUNCTION an_hour_before_max (e_type INT)
  RETURNS TIMESTAMP
  RETURN (SELECT MAX(event_time) FROM atable WHERE event_type = e_type) - 1 HOUR

CREATE FUNCTION an_hour_before_max (e_type INT)
  RETURNS TIMESTAMP
  BEGIN ATOMIC
    DECLARE max_event TIMESTAMP;
    SET max_event = SELECT MAX(event_time) FROM atable WHERE event_type = e_type;
    RETURN max_event - 1 HOUR;
  END
```

Control Statements

In addition to the RETURN statement, the following statements can be used in specific contexts.

ITERATE STATEMENT

The ITERATE statement can be used to cause the next iteration of a labelled iterated statement (a WHILE, REPEAT or LOOP statement). It is similar to the "continue" statement in C and Java.

```
<iterate statement> ::= ITERATE <statement label>
```

LEAVE STATEMENT

The LEAVE statement can be used to leave a labelled block. When used in an iterated statement, it is similar to the "break" statement in C and Java. But it can be used in compound statements as well.

```
<leave statement> ::= LEAVE <statement label>
```

Raising Exceptions

Signal and Resignal Statements allow the routine to throw an exception. If used with the IF or CASE conditions, the exception is thrown conditionally.

SIGNAL

signal statement

The SIGNAL statement is used to throw an exception (or force an exception). When invoked, any exception handler for the given exception is in turn invoked. If there is no handler, the exception is propagated to the enclosing context. In its simplest form, when there is no exception handler for the given exception, routine execution is halted, any change of data is rolled back and the routine throws the exception. By default, the message for the exception is taken from the predefined exception message for the specified SQLSTATE. A custom message can be specified with the optional SET clause.

```
<signal statement> ::= SIGNAL SQLSTATE <state value> [ SET MESSAGE_TEXT =
<character string literal> ]
```

RESIGNAL*resignal statement*

The RESIGNAL statement is used to throw an exception from an exception handler's <SQL procedure statement>, in effect propagating the exception to the enclosing context without further action by the currently active handlers. By default, the message for the exception is taken from the predefined exception message for the specified SQLSTATE. A custom message can be specified with the optional SET clause.

```
<resignal statement> ::= RESIGNAL SQLSTATE <state value> [ SET MESSAGE_TEXT =
<character string literal> ]
```

Routine Polymorphism

More than one version of a routine can be created.

For procedures, the different versions must have different parameter counts. When the procedure is called, the parameter count determines which version is called.

For functions, the different versions can have the same or different parameter counts. When the parameter count of two versions of a function is the same, the type of parameters must be different. When the function is called, the best matching version of the function is used, according to both the parameter count and parameter types. The return type of different versions of a function can be the same or different.

Two versions of an overloaded function are given below. One version accepts TIMESTAMP while the other accepts TIME arguments.

```
CREATE FUNCTION an_hour_before_or_now(t TIMESTAMP)
  RETURNS TIMESTAMP
  IF t > CURRENT_TIMESTAMP THEN
    RETURN CURRENT_TIMESTAMP;
  ELSE
    RETURN t - 1 HOUR;
  END IF

CREATE FUNCTION an_hour_before_or_now(t TIME)
  RETURNS TIME
  CASE t
    WHEN > CURRENT_TIME THEN
      RETURN CURRENT_TIME;
    WHEN >= TIME'01:00:00' THEN
      RETURN t - 1 HOUR;
    ELSE
      RETURN CURRENT_TIME;
  END CASE
```

It is perfectly possible to have different versions of the routine as SQL/JRT or SQL/PSM routines.

Returning Data From Procedures

The OUT or INOUT parameters of a PROCEDURE are used to assign simple values to dynamic parameters or to variables in the calling context.

According to the Standard, an SQL/PSM or SQL/JRT procedure may also return result sets to the calling context. These result sets are dynamic in the sense that a procedure may return a different number of result sets or none at all in different invocations. The SQL Standard uses a mechanism called CURSORS for accessing and modifying rows of a result set one by one. This mechanism is necessary when the database is accessed from an external application program. The JDBC ResultSet interface allows this method of access from Java programs and is supported by HyperSQL.

HyperSQL support this method of returning single or multiple result sets from SQL/PSM procedures only via the JDBC CallableStatement interface. Cursors are declared and opened within the body of the procedure. No further operation is performed on the cursors within the procedure. When the execution of the procedure is complete, the cursors become available as Java ResultSet objects via the CallableStatement instance that called the SQL/PSM procedure.

The JDBC CallableStatement class is used with the SQL statement `CALL <routine name> (<argument 1>, ...)` to call procedures (also to call functions). After the call to `execute()`, the `getXXX()` methods can be used to retrieve INOUT or OUT arguments after the call. The `getMoreResults()` method and the `getResultSet()` method can be used to access the ResultSet(s) returned by a procedure that returns one or more results. If the procedure returns more than one result set, the `getMoreResults()` call moves to the next result.

In the example below, the procedure inserts a row into the customer table. It then performs the SELECT statement to return the latest inserted row as a result set. Therefore the definition includes the `DYNAMIC RESULT SETS 1` clause. You must specify correctly the maximum number of result sets that the procedure may return.

```
CREATE PROCEDURE new_customer(firstname VARCHAR(50), lastname VARCHAR(50))
MODIFIES SQL DATA DYNAMIC RESULT SETS 1
BEGIN ATOMIC
  DECLARE result CURSOR FOR SELECT * FROM CUSTOMERS WHERE ID = IDENTITY();
  INSERT INTO CUSTOMERS VALUES (DEFAULT, firstname, lastname, CURRENT_TIMESTAMP);
  OPEN result;
END
```

The above procedure is called in Java using a CallableStatement

```
Connection conn = ...;
CallableStatement call = conn.prepareCall("call new_customer(?, ?)");
call.setString(1, "Paul");
call.setString(2, "Smith");
call.execute();
if (call.getMoreResults())
  ResultSet result = call.getResultSet();
```

In the example below a procedure has one IN argument and two OUT arguments. The JDBC CallableStatement is used to retrieve the values returned in the OUT arguments.

```
CREATE PROCEDURE get_customer(IN id INT, OUT firstname VARCHAR(50), OUT lastname VARCHAR(50))
READS SQL DATA
BEGIN ATOMIC
  -- this statement uses the id to get firstname and lastname
  SELECT first_name, last_name INTO firstname, lastname FROM customers WHERE cust_id = id;
END

Connection conn = ...;
CallableStatement call = conn.prepareCall("call get_customer(?, ?, ?)");
call.setInt(1, 121); // only the IN (or INOUT) arguments should be set before the call
call.execute();
```

```
String firstname = call.getString(2); // the OUT (or INOUT) arguments are retrieved after the
call
String lastname = call.getString(3);
```

SQL/JRT procedures are discussed in the Java Language Procedures section below. Those routines are called exactly the same way as SQL/PSM procedures, using the JDBC CallableStatement interface.

It is also possible to use a JDBC Statement or PreparedStatement object to call a procedure if the procedure arguments are constant. If the procedure returns one or more result sets, the Statement#getMoreResults() method should be called before retrieving the ResultSet.

Java functions are called from JDBC similar to procedures. With functions, the getMoreResults() method should not be called at all.

Recursive Routines

Routines can be recursive. Recursive functions are often functions that return arrays or tables. To create a recursive routine, the routine definition must be created first with a dummy body. Then the ALTER ROUTINE statement is used to define the routine body.

In the example below, the table contains a tree of rows each with a parent. The routine returns an array containing the id list of all the direct and indirect children of the given parent. The routine appends the array variable id_list with the id of each direct child and for each child appends the array with the id array of its children by calling the routine recursively.

The routine can be used in a SELECT statement as the example shows.

```
CREATE TABLE ptree (pid INT, id INT);
INSERT INTO ptree VALUES (NULL, 1) ,(1,2), (1,3),(2,4),(4,5),(3,6),(3,7);

-- the function is created and always throws an exception when used
CREATE FUNCTION child_arr(p_pid INT) RETURNS INT ARRAY
  SPECIFIC child_arr_one
  READS SQL DATA
  SIGNAL SQLSTATE '45000'

-- the actual body of the function is defined, replacing the statement that throws the exception
ALTER SPECIFIC ROUTINE child_arr_one
  BEGIN ATOMIC
    DECLARE id_list INT ARRAY DEFAULT ARRAY[];
    for_loop:
    FOR SELECT id FROM ptree WHERE pid = p_pid DO
      SET id_list[CARDINALITY(id_list) + 1] = id;
      SET id_list = id_list || child_arr(id);
    END FOR for_loop;
    RETURN id_list;
  END

-- the function can now be used in SQL statements
SELECT * FROM TABLE(child_arr(2))
```

In the next example, a table with two columns is returned instead of an array. In this example, a local table variable is declared and filled with the children and the children's children.

```
CREATE FUNCTION child_table(p_pid INT) RETURNS TABLE(r_pid INT, r_id INT)
  SPECIFIC child_table_one
  READS SQL DATA
  SIGNAL SQLSTATE '45000'

ALTER SPECIFIC ROUTINE child_table_one
  BEGIN ATOMIC
    DECLARE TABLE child_tree (pid INT, id INT);
```

```

for_loop:
FOR SELECT pid, id FROM ptree WHERE pid = p_pid DO
  INSERT INTO child_tree VALUES pid, id;
  INSERT INTO child_tree SELECT r_pid, r_id FROM TABLE(child_table(id));
END FOR for_loop;
RETURN TABLE(SELECT * FROM child_tree);
END

SELECT * FROM TABLE(child_table(1))

```

Infinite recursion is not possible as the routine is terminated when a given depth is reached.

Java Language Routines (SQL/JRT)

The general features of SQL-Invoked Routines are shared between PSM and JRT routines. These features are covered in the previous section. This section deals with specific aspects of JRT routines.

The body of a Java language routine is a static method of a Java class, specified with a fully qualified method name in the routine definition. A simple CREATE FUNCTION example is given below, which defines the function to call the `java.lang.Math.sinh(double d)` Java method. The function can be called in SQL statements just like any built-in function.

```

CREATE FUNCTION sinh(v DOUBLE) RETURNS DOUBLE
LANGUAGE JAVA DETERMINISTIC NO SQL
EXTERNAL NAME 'CLASSPATH:java.lang.Math.sinh'

SELECT sinh(doublecolumn) FROM mytable

```

In the example below, the static method named `toZeroPaddedString` is specified to be called when the function is invoked.

```

CREATE FUNCTION zero_pad(x BIGINT, digits INT, maxsize INT)
RETURNS CHAR VARYING(100)
LANGUAGE JAVA DETERMINISTIC NO SQL
EXTERNAL NAME 'CLASSPATH:org.hsqldb.lib.StringUtil.toZeroPaddedString'

```

The signature of the Java method (used in the Java code but not in SQL code to create the function) is given below:

```
public static String toZeroPaddedString(long value, int precision, int maxSize)
```

The parameter and return types of the SQL routine definition must match those of the Java method according to the table below:

SMALLINT	short or Short
INT	int or Integer
BIGINT	long or Long
NUMERIC or DECIMAL	BigDecimal
FLOAT or DOUBLE	double or Double
CHAR or VARCHAR	String
DATE	java.sql.Date
TIME	java.sql.Time
TIMESTAMP	java.sql.Timestamp
BINARY	Byte[]
BOOLEAN	boolean or Boolean

ARRAY of any type	java.sql.Array
TABLE	java.sql.ResultSet

If the specified Java method is not found or its parameters and return types do not match the definition, an exception is raised. If more than one version of the Java method exist, then the one with matching parameter and return types is found and registered. If two “equivalent” methods exist, the first one is registered. (This situation arises only when a parameter is a primitive in one version and an Object in another version, e.g. `long` and `java.lang.Long`.)

When the Java method of an SQL/JRT routine returns a value, it should be within the size and precision limits defined in the return type of the SQL-invoked routine, otherwise an exception is raised. Any difference in numeric scale is ignored and corrected. For example, in the above example, the `RETURNS CHAR VARYING(100)` clause limits the length of the strings returned from the Java method to 100. But if the number of digits after the decimal point (scale) of a returned `BigDecimal` value is larger than the scale specified in the `RETURNS` clause, the decimal fraction is silently truncated and no exception or warning is raised.

When the function is specified as `RETURNS TABLE(...)` the static Java method should return a `JDBCResultSet` instance. For an example of how to construct a `JDBCResultSet` for this purpose, see the source code for the `org.hsqldb.jdbc.JDBCArray` class.

Polymorphism

If two versions of the same SQL invoked routine with different parameter types are required, they can be defined to point to the same method name or different method names, or even methods in different classes. In the example below, the first two definitions refer to the same method name in the same class. In the Java class, the two static methods are defined with corresponding method signatures.

In the third example, the Java function returns a result set and the SQL declaration includes `RETURNS TABLE`.

```
CREATE FUNCTION an_hour_before_or_now(t TIME)
  RETURNS TIME
  NO SQL
  LANGUAGE JAVA PARAMETER STYLE JAVA
  EXTERNAL NAME 'CLASSPATH:org.npo.lib.nowLessAnHour'

CREATE FUNCTION an_hour_before_or_now(t TIMESTAMP)
  RETURNS TIMESTAMP
  NO SQL
  LANGUAGE JAVA PARAMETER STYLE JAVA
  EXTERNAL NAME 'CLASSPATH:org.npo.lib.nowLessAnHour'

CREATE FUNCTION testquery(i INTEGER)
  RETURNS TABLE(n VARCHAR(20), i INT)
  READS SQL DATA
  LANGUAGE JAVA
  EXTERNAL NAME 'CLASSPATH:org.hsqldb.test.TestJavaFunctions.getQueryResult'
```

In the Java class the definitions are as follows. Note the definition of the `getQueryResult` method begins with a `java.sql.Connection` parameter. This parameter is ignored when choosing the Java method. The parameter is used to pass the current JDBC connection to the Java method.

```
public static java.sql.Time nowLessAnHour(java.sql.Time value) {
    ...
}

public static java.sql.Timestamp nowLessAnHour(java.sql.Timestamp value)
    ...
}
```

```
public static ResultSet getQueryResult(Connection connection, int i) throws SQLException {
    Statement st = connection.createStatement();
    return st.executeQuery("SELECT * FROM T WHERE I < " + i);
}
```

Java Language Procedures

Java procedures are defined similarly to functions. The differences are:

- The return type of the Java static method must be void.
- If a parameter is defined as OUT or INOUT, the corresponding Java static method parameter must be defined as an array of the JDBC non-primitive type.
- When the Java static method is invoked, the OUT and INOUT arguments are passed to the Java method as a single-element array.
- The static method can modify the OUT or INOUT argument by assigning a value to the sole element of the argument array.
- A procedure can return one or more result sets. These are instantiated as JDBC ResultSet objects by the Java static and returned in array arguments of the method. The signature of the Java method for a procedure that has N declared parameters and returns M result sets has the following pattern. The N parameters corresponding to the signature of the declared SQL procedure are defined first, followed by M parameters as ResultSet arrays.

When the SQL procedure is executed, the Java method is called with single element array arguments passed for OUT and INOUT SQL parameters, and single element arrays of ResultSet for the returned ResultSet objects. The Java method may call the execute() or executeQuery() methods of JDBC Statement or PreparedStatement objects that are declared within the method and assign the ResultSet objects to the first element of each ResultSet[] argument. For the returned ResultSet objects, the Java method should not call the methods of java.sql.ResultSet before returning.

```
void methodName(<arg1>, ... <argN>, ResultSet[] r1, ..., ResultSet[] rM)
```

- If the procedure contains SQL statements, only statements for data access and manipulation are allowed. The Java method should not perform commit or rollback. The SQL statements should not change the session settings and should not include statements that create or alter tables or other database objects. These rules are generally enforced by the engine, but additional enforcement may be added in future versions

An example of a procedure definition, together with its Java signature, is given below. This procedure is the SQL/JRT version of the example discussed above for SQL/PSM.

```
CREATE PROCEDURE get_customer(IN id INT, OUT firstname VARCHAR(50), OUT lastname VARCHAR(50))
  READS SQL DATA
  LANGUAGE JAVA
  EXTERNAL NAME 'CLASSPATH:org.hsqldb.test.Test01.getCustomerProcedure'

public static void getCustomerProcedure(int id, String[] firstn, String[] lastn)
  throws java.sql.SQLException {
    firstn[0] = somevalue; // parameter out value is assigned
    lastn[0] = somevalue; // parameter out value is assigned
}
```

In the next example a procedure is defined to return a result set. The signature of the Java method is also given. The Java method assigns a ResultSet object to the zero element of the result parameter.

```
CREATE PROCEDURE new_customer(firstname VARCHAR(50), lastname VARCHAR(50))
  MODIFIES SQL DATA
```

```

LANGUAGE JAVA
DYNAMIC RESULT SETS 1
EXTERNAL NAME 'CLASSPATH:org.hsqldb.test.Test01.newCustomerProcedure'

public static void newCustomerProcedure(String firstn, String lastn,
                                       ResultSet[] result) throws java.sql.SQLException {
    result[0] = someresultset; // dynamic result set is assigned
}

```

Java language procedures SQL/JRT are used in an identical manner to SQL/PSM routines. See the section under SQL/PSM routines, Returning Data From Procedures, on how to use the JDBC CallableStatement interface to call the procedure and to get the OUT and INOUT arguments and to use the ResultSet objects returned by the procedure.

Java Static Methods

The static methods that are used for procedures and functions must be declared in a public class. The methods must be declared as public static. For functions, the method return type must be one of the JDBC supported types. The IN parameters of the method must be declared as one of the supported types. The OUT and INOUT parameters must be declared as Java arrays of supported types. If the SQL definition of a function includes RETURNS NULL ON NULL INPUT, then the IN parameters of the Java static function can be int or long primitives, otherwise, they must be Integer or Long. The declared Java arrays for OUT and INOUT parameters for SQL INTEGER or BIGINT must be Integer[] or Long[] respectively.

If the SQL definition of the routine includes NO SQL, then no JDBC method call is allowed to execute in the method body. Otherwise, a JDBC Connection can be used within the Java method to access the database. If the definition includes CONTAINS SQL, then no table data can be read. If the definition includes READS SQL DATA, then no table data can be modified. If the definition includes MODIFIES SQL DATA, then data can be modified. In all modes, it is not allowed to execute DDL statements that change the schema definition.

It is possible to use DECLARE LOCAL TEMPORARY TABLE in a Java method, as this is in the session scope.

There are two ways to use the JDBC Connection object.

1. Define the Java method with a Connection parameter as the first parameter. This parameter is "hidden" and only visible to the engine. The rest of the parameters, if any, are used to choose the method according to the required types of parameters.
2. Use the SQL/JRT Standard "jdbc:default:connection" method. With this approach, the Java method does not include a Connection parameter. In the method body, the connection is established with a method call to DriverManager, as in the example below:

```
Connection con = DriverManager.getConnection("jdbc:default:connection");
```

Both methods return a connection that is based on the current session. This connection has some extra properties, for example, the Close() method does not actually close it.

An example of an SQL PROCEDURE with its Java method definition is given below. The CREATE PROCEDURE statement is the same with or without the Connection parameter:

```

CREATE PROCEDURE proc1(IN P1 INT, IN P2 INT, OUT P3 INT)
SPECIFIC P2 LANGUAGE JAVA DETERMINISTIC MODIFIES SQL DATA EXTERNAL NAME
'CLASSPATH:org.hsqldb.test.TestStoredProcedure.procTest2';

```

In the first example, the "jdbc:default:connection" method is used. In the second example, a connection parameter is used

```
public static void procTest2(int p1, int p2,
```

```

        Integer[] p3) throws java.sql.SQLException {

    Connection conn =
        DriverManager.getConnection("jdbc:default:connection");
    java.sql.Statement stmt = conn.createStatement();

    stmt.execute("INSERT INTO MYTABLE VALUES(" + p1 + ", 'test1')");
    stmt.execute("INSERT INTO MYTABLE VALUES(" + p2 + ", 'test2')");

    java.sql.ResultSet rs = stmt.executeQuery("select * from MYTABLE");
    java.sql.ResultSetMetaData meta = rs.getMetaData();

    int cols = meta.getColumnCount();
    p3[0] = Integer.valueOf(cols);

    rs.close();
    stmt.close();
}

// alternative declaration with Connection parameter
// public static void procTest2(Connection conn, int p1, int p2,
//                               Integer[] p3) throws java.sql.SQLException {

```

When the stored procedure is called by the user's program, the value of the OUT parameter can be read after the call.

```

// a CallableStatement is used to prepare the call
// the OUT parameter contains the return value
CallableStatement c = conn.prepareCall("call proc1(1,2,?)");
c.execute();
int value = c.getInt(1);

```

Legacy Support

The legacy HyperSQL statement, `CREATE ALIAS <name> FOR <fully qualified Java method name>` is no longer supported directly. It is supported when importing databases and translates to a special `CREATE FUNCTION <name>` statement that creates the function in the `PUBLIC` schema.

The direct use of a Java method as a function is still supported but deprecated. It is internally translated to a special `CREATE FUNCTION` statement where the name of the function is the double quoted, fully qualified name of the Java method used.

Securing Access to Classes and Routines

By default, the static methods of any class that is on the classpath are available to be used. This can compromise security in some systems. The optional Java system property `hsqldb.method_class_names` allows preventing access to classes other than `java.lang.Math` or specifying a semicolon-separated list of allowed classes. A property value that ends with `*` is treated as a wild card and allows access to all class or method names formed by substitution of the `*` (asterisk).

In the example below, the property has been included as an argument to the Java command.

```

java -Dhsqldb.method_class_names="org.me.MyClass;org.you.YourClass;org.you.lib.*" [the rest of
the command line]

```

The above example allows access to the methods in the two classes: `org.me.MyClass` and `org.you.YourClass` together with all the classes in the `org.you.lib` package. Note that if the property is not defined, no access control is performed at this level.

The user who creates a Java routine must have the relevant access privileges on the tables that are used inside the Java method.

Once the routine has been defined, the normal database access control applies to its user. The routine can be executed only by those users who have been granted EXECUTE privileges on it. Access to routines can be granted to users with GRANT EXECUTE or GRANT ALL. For example `GRANT EXECUTE ON myroutine TO PUBLIC.`

Warning

The definition of SQL/JRT routines referencing the user's Java static methods is stored in the .script file of the database.

If the database is opened in a Java environment that does not have access to the referenced Java static methods on its classpath, the SQL/JRT routines are not created when the database is opened. When the database is closed, the routine definitions are lost.

There is a workaround to prevent opening the database when the static method are not on the classpath. You can create an SQL/PSM procedure which calls all the SQL/JRT functions and procedures in your database. The calls should have the necessary dummy arguments. This procedure will fail to be created when the referenced methods are not accessible and will return "Error in script file". There is no need ever to execute the procedure. However, to avoid accidental use, you can ensure that it does not execute the SQL/JRT routines by adding a line such as `IF TRUE THEN SIGNAL SQLSTATE '45000' ;` before any references to the SQL/JRT routines.

User-Defined Aggregate Functions

HyperSQL adds an extension to the SQL Standard to allow user-defined aggregate functions. A user-defined aggregate function has a single parameter when it is used in SQL statements. Unlike the predefined aggregate functions, the keyword DISTINCT cannot be used when a user-defined aggregate function is invoked. Like all user-defined functions, an aggregate function belongs to a schema and can be polymorphic (with multiple function definitions with the same name but different parameter types).

A user-defined aggregate function can be used in SQL statements where a predefined aggregate function is allowed.

Definition of Aggregate Functions

An aggregate function is always defined with 4 parameters. The first parameter is the parameter that is used when the function is invoked in SQL statements, the rest of the parameter are invisible to the invoking SQL statement. The type of the first parameter is user defined. The type of the second parameter must be BOOLEAN. The third and fourth parameters have user-defined types and must be defined as INOUT parameters. The defined return type of the function determines the type of the value returned when the function is invoked.

CREATE AGGREGATE FUNCTION

user defined aggregate function definition

Aggregate function definition is similar to normal function definition and has the mandatory `<returns clause>`. The BNF is given below.

```
<user defined aggregate function> ::= CREATE AGGREGATE FUNCTION <schema qualified
routine name> <SQL aggregate parameter declaration list> <returns clause>
<routine characteristics> <routine body>
```

The parameter declaration list BNF is given below. The type of the first parameter is used when the function is invoked as part of an SQL statement. When multiple versions of a function are required, each version will have the first parameter of a different type.

```
<SQL aggregate declaration list> ::= <left paren> [IN] [ <SQL parameter name> ]
<parameter type> <comma> [IN] [ <SQL parameter name> ] BOOLEAN <comma> INOUT
[ <SQL parameter name> ] <parameter type> <comma> INOUT [ <SQL parameter name> ]
<parameter type> <right paren>
```

The return type is user defined. This is the type of the resulting value when the function is called. Usually an aggregate function is defined with `CONTAINS SQL`, as it normally does not read the data in database tables, but it is possible to define the function with `READS SQL DATA` and access the database tables.

When a SQL statement that uses the aggregate function is executed, HyperSQL invokes the aggregate function, with all the arguments set, once per each row in order to compute the values. Finally, it invokes the function once more to return the final result.

In the computation phase, the first argument is the value of the user argument as specified in the SQL statement, computed for the current row. The second argument is the boolean `FALSE`. The third and fourth argument values can have any type and are initially null, but they can be updated in the body of the function during each invocation. The third and fourth arguments act as registers and hold their values between invocations. The return value of the function is ignored during the computation phase (when the second parameter is `FALSE`).

After the computation phase, the function is invoked once more to get the final result. In this invocation, the first argument is `NULL` and the second argument is boolean `TRUE`. The third and fourth arguments hold the values they held at the end of the last invocation. The value returned by the function in this invocation is used as the result of the aggregate function computation in the invoking SQL statement. In SQL queries with `GROUP BY`, the call sequence is repeated separately for each separate group.

SQL PSM Aggregate Functions

The example below features a user-defined version of the Standard `AVG(<value expression>)` aggregate function for `INTEGER` input and output types. This function behaves differently from the Standard `AVG` function as it returns 0 when all the input values are null.

```
CREATE AGGREGATE FUNCTION udavg(IN x INTEGER, IN flag BOOLEAN, INOUT addup BIGINT, INOUT counter
INT)
  RETURNS INTEGER
  CONTAINS SQL
  BEGIN ATOMIC
    IF flag THEN
      RETURN addup / counter;
    ELSE
      SET counter = COALESCE(counter, 0) + 1;
      SET addup = COALESCE(addup, 0) + COALESCE(x, 0);
      RETURN NULL;
    END IF;
  END
```

The user-defined aggregate function is used in a select statement in the example below. Only the first parameter is visible and utilised in the select statement.

```
SELECT udavg(id) FROM customers GROUP BY lastname;
```

In the example below, the function returns an array that contains all the values passed for the aggregated column. For use with longer arrays, you can optimise the function by defining a larger array in the first iteration, and using the `TRIM_ARRAY` function on the `RETURN` to cut the array to size. This function is similar to the built-in `ARRAY_AGG` function

```
CREATE AGGREGATE FUNCTION array_aggregate(IN val VARCHAR(100), IN flag boolean, INOUT buffer
VARCHAR(100) ARRAY, INOUT counter INT)
  RETURNS VARCHAR(100) ARRAY
  CONTAINS SQL
  BEGIN ATOMIC
    IF flag THEN
      RETURN buffer;
    ELSE
```

```

    IF val IS NULL THEN RETURN NULL; END IF;
    IF counter IS NULL THEN SET counter = 0; END IF;
    SET counter = counter + 1;
    IF counter = 1 THEN SET buffer = ARRAY[val];
    ELSE SET buffer[counter] = val; END IF;
    RETURN NULL;
  END IF;
END

```

The tables and data for the select statement below are created with the DatabaseManager or DatabaseManagerSwing GUI apps. (You can find the SQL in the TestSelf.txt file in the zip). Part of the output is shown. Each row of the output includes an array containing the values for the invoices for each customer.

```

SELECT ID, FIRSTNAME, LASTNAME, ARRAY_AGGREGATE(CAST(INVOICE.TOTAL AS VARCHAR(100)))
  FROM customer JOIN INVOICE ON ID =CUSTOMERID
  GROUP BY ID, FIRSTNAME, LASTNAME

11 Susanne   Karsen   ARRAY['3988.20']
12 John      Peterson ARRAY['2903.10','4382.10','4139.70','3316.50']
13 Michael   Clancy   ARRAY['6525.30']
14 James     King     ARRAY['3665.40','905.10','498.00']
18 Sylvia    Clancy   ARRAY['634.20','4883.10']
20 Bob       Clancy   ARRAY['3414.60','744.60']

```

In the example below, the function returns a string that contains the comma-separated list of all the values passed for the aggregated column. This function is similar to the built in GROUP_CONCAT function.

```

CREATE AGGREGATE FUNCTION group_concatenate
  (IN val VARCHAR(100), IN flag BOOLEAN, INOUT buffer VARCHAR(1000), INOUT counter INT)
  RETURNS VARCHAR(1000)
  CONTAINS SQL
  BEGIN ATOMIC
  IF FLAG THEN
    RETURN BUFFER;
  ELSE
    IF val IS NULL THEN RETURN NULL; END IF;
    IF buffer IS NULL THEN SET BUFFER = ''; END IF;
    IF counter IS NULL THEN SET COUNTER = 0; END IF;
    IF counter > 0 THEN SET buffer = buffer || ','; END IF;
    SET buffer = buffer + val;
    SET counter = counter + 1;
    RETURN NULL;
  END IF;
END

```

The same tables and data as for the previous example is used. Part of the output is shown. Each row of the output is a comma-separated list of names.

```

SELECT group_concatenate(firstname || ' ' || lastname) FROM customer GROUP BY lastname

Laura Steel,John Steel,John Steel,Robert Steel
Robert King,Robert King,James King,George King,Julia King,George King
Robert Sommer,Janet Sommer
Michael Smith,Anne Smith,Andrew Smith
Bill Fuller,Anne Fuller
Laura White,Sylvia White
Susanne Clancy,Michael Clancy,Sylvia Clancy,Bob Clancy,Susanne Clancy,John Clancy

```

Java Aggregate Functions

A Java aggregate function is defined similarly to PSM functions, apart from the routine body, which is defined as EXTERNAL NAME . . . The Java function signature must follow the rules for both nullable and INOUT parameters, therefore:

No argument is defined as a primitive or primitive array type. This allows nulls to be passed to the function. The second and third arguments must be defined as arrays of the JDBC non-primitive types listed in the table in the previous section.

In the example below, a user-defined aggregate function for geometric mean is defined.

```
CREATE AGGREGATE FUNCTION geometric_mean(IN val DOUBLE, IN flag BOOLEAN, INOUT register DOUBLE,
INOUT counter INT)
  RETURNS DOUBLE
  NO SQL
  LANGUAGE JAVA
  EXTERNAL NAME 'CLASSPATH:org.hsqldb.test.Test01.geometricMean'
```

The Java function definition is given below:

```
public static Double geometricMean(Double in, Boolean flag,
    Double[] register, Integer[] counter) {
    if (flag) {
        if (register[0] == null) { return null; }
        double a = register[0].doubleValue();
        double b = 1 / (double) counter[0];
        return Double.valueOf(java.lang.Math.pow(a, b));
    }
    if (in == null) { return null; }
    if (in.doubleValue() == 0) { return null; }
    if (register[0] == null) {
        register[0] = in;
        counter[0] = Integer.valueOf(1);
    } else {
        register[0] = Double.valueOf(register[0].doubleValue() * in.doubleValue());
        counter[0] = Integer.valueOf(counter[0].intValue() + 1);
    }
    return null;
}
```

In a select statement, the function is used exactly like the built-in aggregate functions:

```
SELECT geometric_mean(age) FROM FROM customer
```

Chapter 9. Triggers

Fred Toussi, The HSQL Development Group

\$Revision: 3042 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

Trigger functionality first appeared in SQL:1999. Triggers embody the *live database* concept, where changes in SQL data can be monitored and acted upon. This means each time a DELETE, UPDATE or INSERT is performed, additional actions are taken by the declared triggers. SQL Standard triggers are *imperative* while the *relational* aspects of SQL are *declarative*. Triggers allow performing an arbitrary transformation of data that is being updated or inserted, or to prevent insert, updated or deletes, or to perform additional operations.

Some bad examples of SQL triggers in effect enforce an “integrity constraint” which would better be expressed as a CHECK constraint. A trigger that causes an exception if the value inserted in a column is negative is such an example. A check constraint that declares `CHECK VALUE >= 0` (declarative) is a better way of expressing an integrity constraint than a trigger that throws an exception if the same condition is false.

Usage constraints cannot always be expressed by SQL’s integrity constraint statements. Triggers can enforce these constraints. For example, it is not possible to use a check constraint to prevent data inserts or deletes on weekends. A trigger can be used to enforce the time when each operation is allowed.

A trigger is declared to activate when an UPDATE, INSERT or DELETE action is performed on a table. These actions may be direct or indirect. Indirect actions may arise from CASCADE actions of FOREIGN KEY constraints, or from data change statements performed on a VIEW that is based on the table that in.

It is possible to declare multiple triggers on a single table. The triggers activate one by one according to the order in which they were defined. HyperSQL supports an extension to the CREATE TRIGGER statement, which allows the user to specify the execution order of the new trigger.

A row level trigger allows access to the deleted or inserted rows. For UPDATE actions there is both an old and new version of each row. A trigger can be specified to activate before or after the action has been performed.

BEFORE Triggers

A trigger that is declared as BEFORE DELETE cannot modify the deleted row. In other words, it cannot decide to delete a different row by changing the column values of the row. A trigger that is declared as BEFORE INSERT and BEFORE UPDATE can modify the values that are inserted into the database. For example, a badly formatted string can be cleaned up by a trigger before INSERT or UPDATE.

BEFORE triggers cannot modify the other tables of the database. All BEFORE triggers can veto the action by throwing an exception.

Because BEFORE triggers can modify the inserted or updated rows, all constraint checks are performed after the execution of the BEFORE triggers. The checks include NOT NULL constraints, length of strings, CHECK constraints, and FOREIGN key constraints.

AFTER Triggers

AFTER triggers can perform additional data changes, for example inserting an additional row into a different table for data audits or logs. These triggers cannot modify the rows that have been modified by the INSERT or UPDATE action.

INSTEAD OF Triggers

A trigger that is declared on a VIEW, is an INSTEAD OF trigger. This term means when an INSERT, UPDATE or DELETE statement is executed with the view as the target, the trigger action is all that is performed, and no further data change takes place on the view. The trigger action can include all the statements that are necessary to change the data in the tables that underlie the view, or even other tables, such as audit tables. With the use of INSTEAD OF triggers a read-only view can effectively become updatable or insertable-into.

An example of INSTEAD OF TRIGGERS is one that performs an INSERT, UPDATE or DELETE on multiple tables that are used in the view.

Trigger Properties

A trigger is declared on a specific table or view. Various trigger properties determine when the trigger is executed and how.

Trigger Event

The trigger event specifies the type of SQL statement that causes the trigger to execute. Each trigger is specified to execute when an INSERT, DELETE or UPDATE takes place.

The event can be filtered by two separate means. For all triggers, the WHEN clause can specify a condition against the rows that are the subject of the trigger, together with the data in the database. For example, a trigger can activate when the size of a table becomes larger than a certain amount. Or it can activate when the values in the rows being modified satisfy certain conditions.

An UPDATE trigger can be declared to execute only when certain columns are the subject of an update statement. For example, a trigger declared as AFTER UPDATE OF (datecolumn) will activate only when the UPDATE statement that is executed includes the column, datecolumn, as one of the columns specified in its SET statements.

Granularity

A statement level trigger is performed once for the executed SQL statement and is declared as FOR EACH STATEMENT.

A row level trigger is performed once for each row that is modified during the execution of an SQL statement and is declared as FOR EACH ROW. Note that an SQL statement can INSERT, UPDATE or DELETE zero or more rows.

If a statement does not apply to any row, then the trigger is not executed.

If FOR EACH ROW or FOR EACH STATEMENT is not specified, then the default is FOR EACH STATEMENT.

The granularity dictates whether the REFERENCING clause can specify OLD ROW, NEW ROW, or OLD TABLE, NEW TABLE.

A trigger declared as FOR EACH STATEMENT can only be an AFTER trigger. These triggers are useful for logging the event that was triggered.

Trigger Action Time

A trigger is executed BEFORE, AFTER or INSTEAD OF the trigger event.

INSTEAD OF triggers are allowed only when the trigger is declared on a VIEW. With this type of trigger, the event (SQL statement) itself is not executed, only the trigger.

BEFORE or AFTER triggers are executed just before or just after the execution of the event. For example, just before a row is inserted into a table, the BEFORE trigger is activated, and just after the row is inserted, the AFTER trigger is executed.

BEFORE triggers can modify the row that is being inserted or updated. AFTER triggers cannot modify rows. They are usually used to perform additional operations, such as inserting rows into other tables.

A trigger declared as FOR EACH STATEMENT can only be an AFTER trigger.

References to Rows

If the old rows or new rows are referenced in the SQL statements in the trigger action, they must have names. The REFERENCING clause is used to give names to the old and new rows. The clause, REFERENCING OLD | NEW TABLE is used for statement level triggers. The clause, REFERENCING OLD | NEW ROW is used for row level triggers. If the old rows or new rows are referenced in the SQL statements in the trigger action, they must have names. In the SQL statements, the columns of the old or new rows are qualified with the specified names.

Trigger Condition

The WHEN clause can specify a condition for the columns of the row that is being changed. Using this clause you can simply avoid unnecessary trigger activation for rows that do not need it.

For UPDATE trigger, you can specify a list of columns of the table. If a list of columns is specified, then if the UPDATE statement does not change the columns with SET clauses, then the trigger is not activated at all.

Trigger Action in SQL

The trigger action specifies what the trigger does when it is activated. This is usually written as one or more SQL statements.

When a row level trigger is activated, there is an OLD ROW, or a NEW ROW, or both. An INSERT statement supplies a NEW ROW row to be inserted into a table. A DELETE statement supplies an OLD ROW be deleted. An UPDATE statement supplies both OLD ROW and NEW ROW that represent the updated rows before and after the update. The REFERENCING clause gives names to these rows, so that the rows can be referenced in the trigger action.

In the example below, a name is given to the NEW ROW and it is used both in the WHEN clause and in the trigger action SQL to insert a row into a triglog table after each row insert into the testtrig table.

```
CREATE TRIGGER trig AFTER INSERT ON testtrig
  REFERENCING NEW ROW AS newrow
  FOR EACH ROW WHEN (newrow.id > 1)
  INSERT INTO TRIGLOG VALUES (newrow.id, newrow.data, 'inserted')
```

In the example blow, the trigger code modifies the updated data if a condition is true. This type of trigger is useful when the application does not perform the necessary checks and modifications to data. The statement block that starts with BEGIN ATOMIC is similar to an SQL/PSM block and can contain all the SQL statements that are allowed in an SQL/PSM block.

```
CREATE TRIGGER t BEFORE UPDATE ON customer
```

```

REFERENCING NEW AS newrow FOR EACH ROW
BEGIN ATOMIC
  IF LENGTH(newrow.firstname) > 10 THEN
    SET newrow.firstname = LOWER(newrow.firstname);
  END IF;
END

```

Trigger Action in Java

A trigger action can be written as a Java class that implements the `org.hsqldb.Trigger` interface. This interface has a single method which is called when the trigger is activated, either before or after the event. When the method is called by the engine, it supplies the type of trigger as an int value defined by the interface (as type argument), the name of the trigger (as trigName argument), the name of the table (as tabName argument), the OLD ROW (as oldRow argument) and the NEW ROW (as newRow argument). The oldRow argument is null for row level INSERT triggers. The newRow argument is null for row level DELETE triggers. For table level triggers, both arguments are null (that is, there is no access to the data). The triggerType argument is one of the constants in the `org.hsqldb.Trigger` interface which indicate the type of trigger, for example, `INSERT_BEFORE_ROW` or `UPDATE_AFTER_ROW`.

The Java class for the trigger can be reused for several triggers on different tables. The method code can distinguish between the different tables and triggers using the supplied arguments and take appropriate action.

```
fire (int triggerType, String name, String table, Object row1[], Object row2[])
```

The Java method for a synchronous trigger (see below) can modify the values in `newRow2` in a BEFORE trigger. Such modifications are reflected in the row that is being inserted or updated. Any other modifications are ignored by the engine.

A Java trigger that uses an instance of `org.hsqldb.Trigger` has two forms, synchronous, or asynchronous (immediate or queued). By default, or when `QUEUE 0` is specified, the action is performed immediately by calling the Java method. This is similar to SQL trigger actions.

When `QUEUE n` is specified with `n` larger than 0, the engine uses a separate thread to execute the Java method, using a queue with the size `n`. For certain applications, such as real-time systems this allows asynchronous notifications to be sent by the trigger event, without introducing delays in the engine. With asynchronous triggers, an extra parameter, `NOWAIT` can be used in trigger definition. This overcomes the queue full condition. In this mode, old calls that are still in the queue are discarded one by one and replaced with new calls.

Java row level triggers that are declared with BEFORE trigger action time can modify the row data. Triggers with AFTER trigger action time can modify the database, e.g. insert new rows. If the trigger needs to access the database, the same method as in Java Language Routines SQL/JRT can be used. The Java code should connect to the URL `"jdbc:default:connection"` and use this connection to access the database.

For sample trigger classes and test code see, `org.hsqldb.sample.TriggerSample`, `org.hsqldb.test.TestTriggers`, `org.hsqldb.test.TriggerClass` and the associated text script `TestTriggers.txt` in the `/testrun/hsqldb/` directory. In the example below, the trigger is activated only if the update statement includes SET clauses that modify any of the specified columns (c1, c2, c3). Furthermore, the trigger is not activated if the c2 column in the updated row is null.

```

CREATE TRIGGER TRIGBUR BEFORE UPDATE OF c1, c2, c3 ON testtrig
referencing NEW ROW AS newrow
FOR EACH ROW WHEN (newrow.c2 IS NOT NULL)
CALL "org.hsqldb.test.TriggerClass"

```

Java functions can be called from an SQL trigger. So it is possible to define the Java function to perform any external communication that are necessary for the trigger, and use SQL code for checks and alterations to data.

```

CREATE TRIGGER t BEFORE UPDATE ON customer
REFERENCING NEW AS newrow FOR EACH ROW

```

```

BEGIN ATOMIC
  IF LENGTH(newrow.firstname) > 10 THEN
    CALL my_java_function(newrow.firstname, newrow.lastname);
  END IF;
END

```

Trigger Creation

CREATE TRIGGER

trigger definition

```

<trigger definition> ::= CREATE TRIGGER <trigger name> <trigger action time>
<trigger event> ON <table name> [BEFORE <other trigger name>] [ REFERENCING
<transition table or variable list> ] <triggered action>

```

```

<trigger action time> ::= BEFORE | AFTER | INSTEAD OF

```

```

<trigger event> ::= INSERT | DELETE | UPDATE [ OF <trigger column list> ]

```

```

<trigger column list> ::= <column name list>

```

```

<triggered action> ::= [ FOR EACH { ROW | STATEMENT } ] [ <triggered when
clause> ] <triggered SQL statement>

```

```

<triggered when clause> ::= WHEN <left paren> <search condition> <right paren>

```

```

<triggered SQL statement> ::= <SQL procedure statement> | BEGIN ATOMIC { <SQL
procedure statement> <semicolon> }... END | [QUEUE <integer literal>] [NOWAIT]
CALL <HSQLDB trigger class FQN>

```

```

<transition table or variable list> ::= <transition table or variable>...

```

```

<transition table or variable> ::= OLD [ ROW ] [ AS ] <old transition variable
name> | NEW [ ROW ] [ AS ] <new transition variable name> | OLD TABLE [ AS ]
<old transition table name> | NEW TABLE [ AS ] <new transition table name>

```

```

<old transition table name> ::= <transition table name>

```

```

<new transition table name> ::= <transition table name>

```

```

<transition table name> ::= <identifier>

```

```

<old transition variable name> ::= <correlation name>

```

```

<new transition variable name> ::= <correlation name>

```

Trigger definition is a relatively complex statement. The combination of <trigger action time> and <trigger event> determines the type of the trigger. Examples include BEFORE DELETE, AFTER UPDATE, INSTEAD OF INSERT. If the optional [OF <trigger column list>] is specified for an UPDATE trigger, then the trigger is activated only if one of the columns that is in the <trigger column list> is specified in the UPDATE statement that activates the trigger.

If a trigger is FOR EACH ROW, which is the default option, then the trigger is activated for each row of the table that is affected by the execution of an SQL statement. Otherwise, it is activated once only per statement execution. For FOR EACH ROW triggers, there is an OLD and NEW state for each row. For UPDATE triggers, both OLD and NEW states exist, representing the row before the update, and after the update. For DELETE, triggers, there is only an OLD state.

For INSERT triggers, there is only the NEW state. If a trigger is FOR EACH STATEMENT, then a transient table is created containing all the rows for the OLD state and another transient table is created for the NEW state.

The [REFERENCING <transition table or variable>] is used to give a name to the OLD and NEW data row or table. This name can be referenced in the <SQL procedure statement> to access the data.

The optional <triggered when clause> is a search condition, similar to the search condition of a DELETE or UPDATE statement. If the search condition is not TRUE for a row, then the trigger is not activated for that row.

The <SQL procedure statement> is limited to INSERT, DELETE, UPDATE and MERGE statements.

The <HSQldb trigger class FQN> is a delimited identifier that contains the fully qualified name of a Java class that implements the org.hsqldb.Trigger interface.

Early releases of HyperSQL version 2.0 do not allow the use of OLD TABLE or NEW TABLE in statement level triggers.

TRIGGERED SQL STATEMENT

triggered SQL statement

The <triggered SQL statement> has three forms.

The first form is a single SQL procedure statement. This statement can reference the OLD ROW and NEW ROW variables. For example, it can reference these variables and insert a row into a separate table.

The second form is enclosed in a BEGIN ... END block and can include one or more SQL procedure statements. In BEFORE triggers, you can include SET statements to modify the inserted or updated rows. In AFTER triggers, you can include INSERT, DELETE and UPDATE statements to change the data in other database tables. SELECT and CALL statements are allowed in BEFORE and AFTER triggers. CALL statements in BEFORE triggers should not modify data.

The third form specifies a call to a Java method.

Two examples of a trigger with a block are given below. The block can include elements discussed in the SQL-Invoked Routines chapter, including local variables, loops and conditionals. You can also raise an exception in such blocks in order to terminate the execution of the SQL statement that caused the trigger to execute.

```
/* the trigger throws an exception if a customer with the given last name already exists */
CREATE TRIGGER trigone BEFORE INSERT ON customer
  REFERENCING NEW ROW AS newrow
  FOR EACH ROW WHEN (newrow.id > 100)
  BEGIN ATOMIC
    IF EXISTS (SELECT * FROM CUSTOMER WHERE CUSTOMER.LASTNAME = NEW.LASTNAME) THEN
      SIGNAL SQLSTATE '45000' SET MESSAGE_TEXT = 'already exists';
    END IF;
  END
```

```
/* for each row inserted into the target, the trigger insert a row into the table used for
logging */
CREATE TRIGGER trig AFTER INSERT ON testtrig
  BEFORE othertrigger
  REFERENCING NEW ROW AS newrow
  FOR EACH ROW WHEN (newrow.id > 1)
  BEGIN ATOMIC
    INSERT INTO triglog VALUES (newrow.id, newrow.data, 'inserted');
    /* more statements can be included */
  END
```

TRIGGER EXECUTION ORDER

trigger execution order

```
<trigger execution order> ::= BEFORE <other trigger name>
```

HyperSQL extends the SQL Standard to allow the order of execution of a trigger to be specified by using [BEFORE <other trigger name>] in the definition. The newly defined trigger will be executed before the specified other trigger. If this clause is not used, the new trigger is executed after all the previously defined triggers of the same scope (BEFORE / AFTER, EACH ROW / EACH STATEMENT).

DROP TRIGGER*drop trigger statement*

```
<drop trigger statement> ::= DROP TRIGGER <trigger name>
```

Destroy a trigger.

Chapter 10. Built In Functions

Fred Toussi, The HSQL Development Group

\$Revision: 5581 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Overview

HyperSQL supports a wide range of built-in functions and allows user-defined functions written in SQL and Java languages. User-defined functions are covered in the `SQL-Invoked Routines` chapter. If a built-in function is not available, you can write your own using procedural SQL or Java.

Built-in aggregate functions such as `SUM`, `MAX`, `ARRAY_AGG`, `GROUP_CONCAT` are covered in the `Data Access and Change` chapter, which covers SQL in general. SQL expressions such as `COALESCE`, `NULLIF` and `CAST` are also discussed there.

The built-in functions fall into three groups:

- SQL Standard Functions

A wide range of functions defined by SQL/Foundation are supported. SQL/Foundation functions that have no parameter are called without empty parentheses. Functions with multiple parameters often use keywords instead of commas to separate the parameters. Many functions are overloaded. Among these, some have one or more optional parameters that can be omitted, while the return type of some functions is dependent upon the type of one of the parameters. The usage of SQL Standard Functions (where they can be used) is covered more extensively in the `Data Access and Change` chapter

- JDBC Open Group CLI Functions

These functions were defined as an extension to the CLI standard, which is the basis for ODBC and JDBC and supported by many database products. JDBC supports an escape mechanism to specify function calls in SQL statements in a manner that is independent of the function names supported by the target database engine. For example `SELECT {fn DAYOFMONTH (dateColumn)} FROM myTable` can be used in JDBC and is translated to Standard SQL as `SELECT EXTRACT (DAY_OF_MONTH FROM dateColumn) FROM myTable` if a database engine supports the Standard syntax. If a database engine does not support Standard SQL, then the translation will be different. HyperSQL supports all the function names specified in the JDBC specifications as native functions. Therefore, there is no need to use the `{fn FUNC_NAME (. . .) }` escape with HyperSQL. If a JDBC function is supported by the SQL Standard in a different form, the SQL Standard form is the preferred form to use.

- HyperSQL Built-In Functions

Many additional built-in functions are available for some useful operations. Some of these functions return the current setting for the session and the database. The General Functions accept arguments of different types and return values based on comparison between the arguments.

In the BNF specification used here, words in capital letters are actual tokens. Syntactic elements such as expressions are enclosed in angle brackets. The `<left paren>` and `<right paren>` tokens are represented with the actual

symbol. Optional elements are enclosed with square brackets (<left bracket> and <right bracket>). Multiple options for a required element are enclosed with braces (<left brace> and <right brace>). Alternative tokens are separated with the vertical bar (<vertical bar>). At the end of each function definition, the standard which specifies the function is noted in parentheses as JDBC or HyperSQL, or the SQL/Foundation part of the SQL Standard.

String and Binary String Functions

In SQL, there are three kinds of string: character, binary and bit. The units are respectively characters, octets, and bits. Each kind of string can be in different data types. CHAR, VARCHAR and CLOB are the character data types. BINARY, VARBINARY and BLOB are the binary data types. BIT and BIT VARYING are the bit string types. In all string functions, the position of a unit of the string within the whole string is specified from 1 to the length of the whole string. In the BNF, <char value expr> indicates any valid SQL expression that evaluates to a character type. Likewise, <binary value expr> indicates a binary type and <num value expr> indicates a numeric type.

ASCII

ASCII (<char value expr>)

Returns an INTEGER equal to the ASCII code value of the first character of <char value expr>. (JDBC)

BIT_LENGTH

BIT_LENGTH (<string value expression>)

BIT_LENGTH can be used with character, binary and bit strings. It return a BIGINT value that measures the bit length of the string. (Foundation)

See also CHARACTER_LENGTH and OCTET_LENGTH.

CHAR

CHAR (<UNICODE code>)

The argument is an INTEGER. Returns a character string containing a single character that has the specified <UNICODE code>, which is an integer. ASCII codes are a subset of the allowed values for <UNICODE code>. (JDBC)

CHARACTER_LENGTH

{ CHAR_LENGTH | CHARACTER_LENGTH } (<char value expression> [USING { CHARACTERS | OCTETS }])

The CHAR_LENGTH or CHARACTER_LENGTH function can be used with character strings, while OCTET_LENGTH can be used with character or binary strings and BIT_LENGTH can be used with character, binary and bit strings.

All functions return a BIGINT value that measures the length of the string in the given unit. CHAR_LENGTH counts characters, OCTET_LENGTH counts octets and BIT_LENGTH counts bits in the string. For CHAR_LENGTH, if [USING OCTETS] is specified, the octet count is returned, which is twice the normal length. (Foundation)

CONCAT

CONCAT (<char value expr 1>, <char value expr 2> [, ...])

CONCAT (<binary value expr 1>, <binary value expr 2> [, ...])

The arguments are character strings or binary strings. Returns a string formed by concatenation of the arguments. Minimum number of arguments is 2. Equivalent to the SQL concatenation expression `<value expr 1> || <value expr 2> [|| ...]`.

Handling of null values in the CONCAT function depends on the database property `sql.concat_nulls (SET DATABASE SQL SYNTAX CONCAT NULLS { TRUE || FALSE })`. By default, any null value will cause the function to return null. If the property is set false, then NULL values are replaced with empty strings.

(JDBC)

CONCAT_WS

`CONCAT_WS (<char value separator>, <char value expr 1>, <char value expr 2> [, ...])`

The arguments are character strings. Returns a string formed by concatenation of the arguments from the second argument, using the separator from the first argument. Minimum number of arguments is 3. Equivalent to the SQL concatenation expression `<value expr 1> || <separator> || <value expr 2> [|| ...]`. The function ignores null values and returns an empty string if all values are null. It returns null only if the separator is null.

This function is similar to a MySQL function of the same name.

(HyperSQL)

DIFFERENCE

`DIFFERENCE (<char value expr 1>, <char value expr 2>)`

The arguments are character strings. Converts the arguments into SOUNDEX codes, and returns an INTEGER between 0-4 which indicates how similar the two SOUNDEX value are. If the values are the same, it returns 4, if the values have no similarity, it returns 0. In-between values are returned for partial similarity. (JDBC)

INSERT

`INSERT (<char value expr 1>, <offset>, <length>, <char value expr 2>)`

Returns a character string based on `<char value expr 1>` in which `<length>` characters have been removed from the `<offset>` position and in their place, the whole `<char value expr 2>` is copied. Equivalent to SQL/Foundation `OVERLAY(<char value expr1> PLACING <char value expr2> FROM <offset> FOR <length>)`. (JDBC)

INSTR

`INSTR (<char value expr 1>, <char value expr 2> [, <offset>])`

Returns as a BIGINT value the starting position of the first occurrence of `<char value expr 2>` within `<char value expr 1>`. If `<offset>` is specified, the search begins with the position indicated by `<offset>`. If the search is not successful, 0 is returned. Similar to the LOCATE function but the order of the arguments is reversed. (HyperSQL)

HEXTORAW

`HEXTORAW(<char value expr>)`

Returns a BINARY string formed by translation of hexadecimal digits and letters in the `<char value expr>`. Each character of the `<char value expr>` must be a digit or a letter in the A | B | C | D | E | F set. Each byte of the retired binary string is formed by translating two hex digits into one byte. (HyperSQL)

LCASE

LCASE (<char value expr>)

Returns a character string that is the lower case version of the <char value expr>. Equivalent to SQL/Foundation LOWER (<char value expr>).(JDBC)

LEFT

LEFT (<char value expr>, <count>)

Returns a character string consisting of the first <count> characters of <char value expr>. Equivalent to SQL/Foundation SUBSTRING(<char value expr> FROM 0 FOR <count>).(JDBC)

LENGTH

LENGTH (<char value expr>)

Returns as a BIGINT value the number of characters in <char value expr>. Equivalent to SQL/Foundation CHAR_LENGTH(<char value expr>).(JDBC)

LOCATE

LOCATE (<char value expr 1>, <char value expr 2> [, <offset>])

Returns as a BIGINT value the starting position of the first occurrence of <char value expr 1> within <char value expr 2>. If <offset> is specified, the search begins with the position indicated by <offset>. If the search is not successful, 0 is returned. Without the third argument, LOCATE is equivalent to the SQL Standard function POSITION(<char value expr 1> IN <char value expr 2>).(JDBC)

LOWER

LOWER (<char value expr>)

Returns a character string that is the lower case version of the <char value expr>. (Foundation)

LPAD

LPAD (<char value expr 1>, <length> [, <char value expr 2>])

Returns a character string with the length of <length> characters. The string contains the characters of <char value expr 1> padded to the left with spaces. If <length> is smaller than the length of the string argument, the argument is truncated. If the optional <char value expr 2> is specified, this string is used for padding, instead of spaces. (HyperSQL)

LTRIM

LTRIM (<char value expr>)

Returns a character string based on <char value expr> with the leading space characters removed. Equivalent to SQL/Foundation TRIM(LEADING ' ' FROM <char value expr>).(JDBC)

OCTET_LENGTH

OCTET_LENGTH (<string value expression>)

The OCTET_LENGTH function can be used with character or binary strings.

Return a BIGINT value that measures the length of the string in octets. When used with character strings, the octet count is returned, which is twice the normal length. (Foundation)

OVERLAY

```
OVERLAY ( <char value expr 1> PLACING <char value expr 2>
FROM <start position> [ FOR <string length> ] [ USING CHARACTERS ] )
```

```
OVERLAY ( <binary value expr 1> PLACING <binary value expr 2>
FROM <start position> [ FOR <string length> ] )
```

The character version of OVERLAY returns a character string based on <char value expr 1> in which <string length> characters have been removed from the <start position> and in their place, the whole <char value expr 2> is copied.

The binary version of OVERLAY returns a binary string formed in the same manner as the character version. (Foundation)

POSITION

```
POSITION ( <char value expr 1> IN <char value expr 2> [ USING CHARACTERS ] )
POSITION ( <binary value expr 1> IN <binary value expr 2> )
```

The character and binary versions of POSITION search the string value of the second argument for the first occurrence of the first argument string. If the search is successful, the position in the string is returned as a BIGINT. Otherwise zero is returned. (Foundation)

RAWTOHEX

```
RAWTOHEX( <binary value expr> )
```

Returns a character string composed of hexadecimal digits representing the bytes in the <binary value expr>. Each byte of the <binary value expr> is translated into two hex digits. (HyperSQL)

REGEXP_MATCHES

```
REGEXP_MATCHES ( <char value expr>, <regular expression> )
```

Returns true if the <char value expr> matches the <regular expression> as a whole. The <regular expression> is defined according to Java language regular expression rules. (HyperSQL)

REGEXP_REPLACE

```
REGEXP_REPLACE ( <char value expr 1>, <regular expression>, <char value expr 3> )
```

Replaces <char value expr 1> regions that match the <regular expression> with <char value expr 3>. The <regular expression> is defined according to Java language regular expression rules. (HyperSQL)

REGEXP_SUBSTRING

```
REGEXP_SUBSTRING ( <char value expr>, <regular expression> )
```

Returns the first region in the <char value expr> that matches the <regular expression>. The <regular expression> is defined according to Java language regular expression rules. (HyperSQL)

REGEXP_SUBSTRING_ARRAY

REGEXP_SUBSTRING_ARRAY (<char value expr>, <regular expression>)

Returns all the regions in the the <char value expr> that match the <regular expression>. The <regular expression> is defined according to Java language regular expression rules. Returns an array containing the matching regions (HyperSQL)

REPEAT

REPEAT (<char value expr>, <count>)

Returns a character string based on <char value expr>, repeated <count> times. (JDBC)

REPLACE

REPLACE (<char value expr 1>, <char value expr 2> [, <char value expr 3>])

Returns a character string based on <char value expr 1> where each occurrence of <char value expr 2> has been replaced with a copy of <char value expr 3>. If the function is called with just two arguments, the <char value expr 3> defaults to the empty string and calling the function simply removes the occurrences of <char value expr 2> from the first string.(JDBC)

REVERSE

REVERSE (<char value expr>)

Returns a character string based on <char value expr> with characters in the reverse order. (HyperSQL)

RIGHT

RIGHT (<char value expr>, <count>)

Returns a character string consisting of the last <count> characters of <char value expr>. (JDBC)

RPAD

RPAD (<char value expr 1>, <length> [, <char value expr 2>])

Returns a character string with the length of <length> characters. The string begins with the characters of <char value expr 1> padded to the right with spaces. If <length> is smaller than the length of the string argument, the argument is truncated. If the optional <char value expr 2> is specified, this string is used for padding, instead of spaces. (HyperSQL)

RTRIM

RTRIM (<char value expr>)

Returns a character string based on <char value expr> with the trailing space characters removed. Equivalent to SQL/Foundation TRIM(TRAILING ' ' FROM <character string>).(JDBC)

SOUNDEX

SOUNDEX (<char value expr>)

Returns a four character code representing the sound of <char value expr>. The US census algorithm is used. For example the soundex value for Washington is W252. (JDBC)

UCASE

UCASE (<char value expr>)

Returns a character string that is the upper case version of the <char value expr>. Equivalent to SQL/Foundation UPPER(<char value expr>). (JDBC)

UPPER

UPPER (<char value expr>)

Returns a character string that is the upper case version of the <char value expr>. (Foundation)

Numeric Functions

ABS

ABS (<num value expr> | <interval value expr>)

Returns the absolute value of the argument as a value of the same type. (JDBC and Foundation)

ACOS

ACOS (<num value expr>)

Returns the arc-cosine of the argument in radians as a value of DOUBLE type. (JDBC)

ASIN

ASIN (<num value expr>)

Returns the arc-sine of the argument in radians as a value of DOUBLE type. (JDBC)

ATAN

ATAN (<num value expr>)

Returns the arc-tangent of the argument in radians as a value of DOUBLE type. (JDBC)

ATAN2

ATAN2 (<num value expr 1>, <num value expr 2>)

The <num value expr 1> and <num value expr 2> express the x and y coordinates of a point. Returns the angle, in radians, representing the angle coordinate of the point in polar coordinates, as a value of DOUBLE type. (JDBC)

CEILING

{ CEIL | CEILING } (<num value expr>)

Returns the smallest integer greater than or equal to the argument. If the argument is exact numeric then the result is exact numeric with a scale of 0. If the argument is approximate numeric, then the result is of DOUBLE type. (JDBC and Foundation)

BITAND

BITAND (<num value expr 1>, <num value expr 2>)

BITAND (<bit value expr 1>, <bit value expr 2>)

BITANDNOT

BITANDNOT (<num value expr 1>, <num value expr 2>)

BITANDNOT (<bit value expr 1>, <bit value expr 2>)

BITNOT

BITNOT (<num value expr 1>)

BITNOT (<bit value expr 1>)

BITOR

BITOR (<num value expr 1>, <num value expr 2>)

BITOR (<bit value expr 1>, <bit value expr 2>)

BITXOR

BITXOR (<num value expr 1>, <num value expr 2>)

BITXOR (<bit value expr 1>, <bit value expr 2>)

These functions bit operations on two values, or in the case of BITNOT on a single values. The values are either integer values, or bit strings. The result is an integer value of the same type as the arguments, or a bit string of the same length as the argument. Each bit of the result is formed by performing the operation on corresponding bits of the arguments. The names of the function indicate NOT, OR, AND, XOR operations. The BITANDNOT performs NOT on the second argument, then performs AND on result and the first argument. (HyperSQL)

COS

COS (<num value expr>)

Returns the cosine of the argument (an angle expressed in radians) as a value of DOUBLE type. (JDBC)

COT

COT (<num value expr>)

Returns the cotangent of the argument as a value of DOUBLE type. The <num value expr> represents an angle expressed in radians. (JDBC)

DEGREES

DEGREES (<num value expr>)

Converts the argument (an angle expressed in radians) into degrees and returns the value in the DOUBLE type. (JDBC)

EXP

EXP (<num value expr>)

Returns the exponential value of the argument as a value of DOUBLE type. (JDBC and Foundation)

FLOOR

FLOOR (<num value expr>)

Returns the largest integer that is less than or equal to the argument. If the argument is exact numeric then the result is exact numeric with a scale of 0. If the argument is approximate numeric, then the result is of DOUBLE type. (JDBC and Foundation)

LN

LN (<num value expr>)

Returns the natural logarithm of the argument, as a value of DOUBLE type. (Foundation)

LOG

LOG (<num value expr>)

Returns the natural logarithm of the argument, as a value of DOUBLE type. (JDBC)

LOG10

LOG10 (<num value expr>)

Returns the base 10 logarithm of the argument as a value of DOUBLE type. (JDBC)

MOD (<num value expr 1>, <num value expr 2>)

MOD

Returns the remainder (modulus) of <num value expr 1> divided by <num value expr 2>. The data type of the returned value is the same as the second argument. (JDBC and Foundation)

PI

PI ()

Returns the constant pi as a value of DOUBLE type. (JDBC)

POWER

POWER (<num value expr 1>, <num value expr 2>)

Returns the value of <num value expr 1> raised to the power of <int value expr 2> as a value of DOUBLE type. (JDBC and Foundation)

RADIANS

RADIANS (<num value expr>)

Converts the argument (an angle expressed in degrees) into radians and returns the value in the DOUBLE type. (JDBC)

RAND

RAND ([<int value expr>])

Returns a random value in the DOUBLE type. The optional [<int value expr>] is used as seed value. In HyperSQL each session has a separate random number generator. The first call that uses a seed parameter sets the seed for subsequent calls that do not include a parameter. (JDBC)

ROUND

ROUND (<num value expr>, <int value expr>)

The <num value expr> is of the DOUBLE type or DECIMAL type. The function returns a DOUBLE or DECIMAL value which is the value of the argument rounded to <int value expr> places right of the decimal point. If <int value expr> is negative, the first argument is rounded to <int value expr> places to the left of the decimal point.

This function rounds values ending with .5 or larger away from zero for DECIMAL arguments and results. When the value ends with .5 or larger and the argument and result are DOUBLE, It rounds the value towards the closest even value.

The datetime version is discussed in the next section. (JDBC)

SIGN

SIGN (<num value expr>)

Returns an INTEGER, indicating the sign of the argument. If the argument is negative then -1 is returned. If it is equal to zero then 0 is returned. If the argument is positive then 1 is returned. (JDBC)

SIN

SIN (<num value expr>)

Returns the sine of the argument (an angle expressed in radians) as a value of DOUBLE type. (JDBC)

SQRT

SQRT (<num value expr>)

Returns the square root of the argument as a value of DOUBLE type. (JDBC and Foundation)

TAN

TAN (<num value expr>)

Returns the tangent of the argument (an angle expressed in radians) as a value of DOUBLE type. (JDBC)

TO_NUMBER

TO_NUMBER (<char value expr>)

Performs a cast from character to DECIMAL number. The character string must consist of digits and can have a decimal point. Use the SQL Standard CAST expression instead of this non-standard function. (HyperSQL)

TRUNC

TRUNC (<num value expr> [, <int value expr>])

This is similar to the TRUNCATE function when the first argument is numeric. If the second argument is omitted, zero is used in its place.

The datetime version is discussed in the next section. (HyperSQL)

TRUNCATE

```
TRUNCATE ( <num value expr> [, <int value expr>] )
```

Returns a value in the same type as <num value expr> but may reduce the scale of DECIMAL and NUMERIC values. The value is rounded by replacing digits with zeros from <int value expr> places right of the decimal point to the end. If <int value expr> is negative, ABS(<int value expr>) digits to left of the decimal point and all digits to the right of the decimal points are replaced with zeros. Results of calling TRUNCATE with 12345.6789 with (-2, 0, 2, 4) are (12300, 12345, 12345.67, 12345.6789). The function does not change the number if the second argument is larger than or equal to the scale of the first argument.

If the second argument is not a constant (when it is a parameter or column reference) then the type of the return value is always the same as the type of the first argument. In this case, the discarded digits are replaced with zeros. (JDBC)

WIDTH_BUCKET

```
WIDTH_BUCKET ( <value expr 1> , <value expr 2>, <value expr 3>, <int value expr> )
```

Returns an integer value between 0 and <int value expr> + 1. The initial three parameters are of the same numeric or datetime type. The range, (<value expr 2> , <value expr 3>) is divided into <int value expr> equal sections (buckets). The returned integer value indicates the index of the bucket where <value expr 1> can be placed. If the <value expr 1> falls before or after the range, the return value is 0 or <value expr 1> + 1 respectively.

This function can be used with numeric or datetime values. Invalid arguments, including <int value expr> smaller than 1, or equal values for <value expr 2> and <value expr 3> will cause an exception. (Foundation)

An example is given below:

```
WIDTH_BUCKET( 5, 10, 110, 10)
0

WIDTH_BUCKET( 23, 10, 110, 10)
2

WIDTH_BUCKET( 100, 10, 110, 10)
10

WIDTH_BUCKET( 200, 10, 110, 10)
11
```

Date Time and Interval Functions

Functions to report the time zone.

Functions to Report the Time Zone.

TIMEZONE

```
TIMEZONE ( )
```

Returns the current time zone for the session. Returns an INTERVAL HOUR TO MINUTE value. (HyperSQL)

SESSION_TIMEZONE

```
SESSION_TIMEZONE ( )
```

Returns the default time zone for the current session. Returns an INTERVAL HOUR TO MINUTE value. (HyperSQL)

SESSIO NTIMEZONE

SESSIONTIMEZONE ()

Same as SESSION_TIMEZONE. (HyperSQL)

DATABASE_TIMEZONE

DATABASE_TIMEZONE ()

Returns the time zone for the database engine. This is based on where the database server process is located. Returns an INTERVAL HOUR TO MINUTE value. (HyperSQL)

DBTIMEZONE

DBTIMEZONE ()

Same as DATABASE_TIMEZONE. (HyperSQL)

Functions to Report the Current Datetime

CURRENT_DATE

CURRENT_DATE

CURRENT_TIME

CURRENT_TIME [(<time precision>)]

LOCALTIME

LOCALTIME [(<time precision>)]

CURRENT_TIMESTAMP

CURRENT_TIMESTAMP [(<timestamp precision>)]

LOCALTIMESTAMP

LOCALTIMESTAMP [(<timestamp precision>)]

These datetime functions return the datetime value representing the moment the function is called. CURRENT_DATE returns a value of DATE type. CURRENT_TIME returns a value of TIME WITH TIME ZONE type. LOCALTIME returns a value of TIME type. CURRENT_TIMESTAMP returns a value of TIMESTAMP WITH TIME ZONE type. LOCALTIMESTAMP returns a value of TIMESTAMP type. If the optional [(<time precision>)] or [(<timestamp precision>)] is used, then the returned value has the specified fraction of the second precision. (Foundation)

NOW

NOW ()

This function is equivalent to LOCALTIMESTAMP. It can be used as a no-arg function as the parens are optional. (HyperSQL)

CURDATE

CURDATE ()

This function is equivalent to CURRENT_DATE. (JDBC)

CURTIME

CURTIME ()

This function is equivalent to LOCALTIME. (JDBC)

SYSDATE

SYSDATE

This function is equivalent to LOCALTIMESTAMP. (HyperSQL)

SYSTIMESTAMP

SYSTIMESTAMP

This no-arg function is equivalent to CURRENT_TIMESTAMP and is enabled in ORA syntax mode only. (HyperSQL)

TODAY

TODAY

This no-arg function is equivalent to CURRENT_DATE. (HyperSQL)

Functions to Extract an Element of a Datetime

DAYNAME

DAYNAME (<datetime value expr>)

This function is equivalent to EXTRACT (DAY_NAME FROM ...) Returns a string in the range of Sunday - Saturday. (JDBC)

DAYOFMONTH

DAYOFMONTH (<datetime value expr>)

This function is equivalent to EXTRACT (DAY_OF_MONTH FROM ...) Returns an integer value in the range of 1-31. (JDBC)

DAYOFWEEK

DAYOFWEEK (<datetime value expr>)

This function is equivalent to EXTRACT (DAY_OF_WEEK FROM ...) Returns an integer value in the range of 1-7. The first day of the week is Sunday. (JDBC)

DAYOFYEAR

DAYOFYEAR (<datetime value expr>)

This function is equivalent to EXTRACT (DAY_OF_YEAR FROM ...) Returns an integer value in the range of 1-366. (JDBC)

DAYS

DAYS (<datetime value expr>)

The `<datetime value expr>` is of DATE or TIMESTAMP type. This function returns the DAY number since the first day of the calendar. The first day is numbered 1. (HyperSQL)

HOUR

HOUR (`<datetime value expr>`)

This function is equivalent to `EXTRACT (HOUR FROM ...)` Returns an integer value in the range of 0-23. (JDBC)

MINUTE

MINUTE (`<datetime value expr>`)

This function is equivalent to `EXTRACT (MINUTE FROM ...)` Returns an integer value in the range of 0 - 59. (JDBC)

MONTH

MONTH (`<datetime value expr>`)

This function is equivalent to `EXTRACT (MONTH FROM ...)` Returns an integer value in the range of 1-12. (JDBC)

MONTHNAME

MONTHNAME (`<datetime value expr>`)

This function is equivalent to `EXTRACT (NAME_OF_MONTH FROM ...)` Returns a string in the range of January - December. (JDBC)

QUARTER

QUARTER (`<datetime value expr>`)

This function is equivalent to `EXTRACT (QUARTER FROM ...)` Returns an integer in the range of 1 - 4. (JDBC)

SECOND

SECOND (`<datetime value expr>`)

This function is equivalent to `EXTRACT (SECOND FROM ...)` Returns an integer or decimal in the range of 0 - 59, with the same precision as the `<datetime value expr>`. (JDBC)

SECONDS_SINCE_MIDNIGHT

SECONDS_SINCE_MIDNIGHT (`<datetime value expr>`)

This function is equivalent to `EXTRACT (SECONDS_SINCE_MIDNIGHT FROM ...)` Returns an integer in the range of 0 - 86399. (HyperSQL)

UNIX_MILLIS

UNIX_MILLIS ([`<datetime value expression>`])

This function returns a BIGINT value. With no parameter, it returns the number of milliseconds since 1970-01-01. With a DATE or TIMESTAMP parameter, it converts the argument into number of milliseconds since 1970-01-01. (HyperSQL)

UNIX_TIMESTAMP

```
UNIX_TIMESTAMP ( [ <datetime value expression> ] )
```

This function returns a BIGINT value. With no parameter, it returns the number of seconds since 1970-01-01. With a DATE or TIMESTAMP parameter, it converts the argument into number of seconds since 1970-01-01. The `TIMESTAMP (<num value expression>` function returns a TIMESTAMP from a Unix timestamp. (HyperSQL)

WEEK

```
WEEK ( <datetime value expr> )
```

This function is equivalent to `EXTRACT (WEEK_OF_YEAR FROM ...)` Returns an integer in the range of 1 - 54. (JDBC)

YEAR

```
YEAR ( <datetime value expr> )
```

This function is equivalent to `EXTRACT (YEAR FROM ...)` Returns an integer in the range of 1 - 9999. (JDBC)

EXTRACT

```
EXTRACT ( <extract field> FROM <extract source> )
```

```
<extract field> ::= YEAR | MONTH | DAY | HOUR | MINUTE | DAY_OF_WEEK | WEEK_OF_YEAR  
| QUARTER | DAY_OF_YEAR | DAY_OF_MONTH |
```

```
TIMEZONE_HOUR | TIMEZONE_MINUTE | SECOND | SECONDS_SINCE_MIDNIGHT |
```

```
DAY_NAME | MONTH_NAME
```

```
<extract source> ::= <datetime value expr> | <interval value expr>
```

The EXTRACT function returns a field or element of the `<extract source>`. The `<extract source>` is a datetime or interval expression. The type of the return value is BIGINT for most of the `<extract field>` options. The exceptions is `SECOND` where a DECIMAL value is returned which has the same precision as the datetime or interval expression. The field values `DAY_NAME` or `MONTH_NAME` result in a character string. When `MONTH_NAME` is specified, a string in the range January - December is returned. When `DAY_NAME` is specified, a string in the range Sunday -Saturday is returned.

If the `<extract source>` is `FROM <datetime value expr>`, different groups of `<extract source>` can be used depending on the data type of the expression. The `TIMEZONE_HOUR | TIMEZONE_MINUTE` options are valid only for `TIME WITH TIMEZONE` and `TIMESTAMP WITH TIMEZONE` data types. The `HOUR | MINUTE | SECOND | SECONDS_MIDNIGHT` options, are valid for `TIME` and `TIMESTAMP` types. The rest of the fields are valid for `DATE` and `TIMESTAMP` types.

If the `<extract source>` is `FROM <interval value expr>`, the `<extract field>` must be one of the fields of the `INTERVAL` type of the expressions. The `YEAR | MONTH` options may be valid for `INTERVAL` types based on months. The `DAY | HOUR | MINUTE | SECOND | SECONDS_MIDNIGHT` options may be valid for `INTERVAL` types based on seconds. For example, `DAY | HOUR | MINUTE` are the only valid fields for the `INTERVAL DAY TO MINUTE` data type. (Foundation with HyperSQL extensions)

Functions for Datetime Arithmetic**ADD_MONTHS**

```
ADD_MONTHS ( <datetime value expr>, <numeric value expr>)
```

This function is similar but different to simple addition a MONTH interval to a datetime value. The SQL Standard expression, <datetime value expr> + n MONTH, when used with the last day of a short month such as February, returns a date that has the same day of the month in the target month. The ADD_MONTHS function adjusts the target day to the last day of the target month. For all other days, the behaviour is the same. This function always returns a TIMESTAMP(0) value, regardless of the type of the argument. (HyperSQL)

The example below compares the output of the function and the expression.

```
VALUES ADD_MONTHS ( DATE '2012-02-29' , 1), DATE '2012-02-29' + 1 MONTH

C1                                C2
-----
2012-03-31 00:00:00 2012-03-29
```

LAST_DAY

```
LAST_DAY ( <datetime value expr> )
```

Returns the last day of the month for the given <datetime value expr>. The returned value preserves the year, month, hour, minute and second fields of the timestamp. The type of the result is always TIMESTAMP(0). (HyperSQL)

```
VALUES LAST_DAY ( TIMESTAMP '2012-02-14 12:30:44' )

C1
-----
2012-02-29 12:30:44
```

MONTHS_BETWEEN

```
MONTHS_BETWEEN ( <datetime value expr1> , <datetime value expr2> )
```

Returns the a number (not an INTERVAL) possibly with a fraction, representing the number of months between two days. If both dates have the same day of month, or are on the last day of the month, the result is an exact numeric. Otherwise, the fraction is calculated base on 31 days per month. You can cast the resulting value into INTERVAL MONTH and use it for datetime arithmetic. (HyperSQL)

```
VALUES MONTHS_BETWEEN ( TIMESTAMP '2013-02-14 12:30:44', TIMESTAMP '2012-01-04 12:30:44' )

C1
-----
13.32258064516129000000000000000000
```

TIMESTAMPADD

```
TIMESTAMPADD ( <tsi datetime field>, <numeric value expression>, <datetime value expr>)
```

TIMESTAMPDIFF

```
TIMESTAMPDIFF ( <tsi datetime field>, <datetime value expr 1>, <datetime value expr 2>)
```

```
<tsi datetime field> ::= SQL_TSI_FRAC_SECOND | SQL_TSI_MILLI_SECOND |
SQL_TSI_SECOND | SQL_TSI_MINUTE | SQL_TSI_HOUR | SQL_TSI_DAY | SQL_TSI_WEEK |
SQL_TSI_MONTH | SQL_TSI_QUARTER | SQL_TSI_YEAR
```

HyperSQL supports full SQL Standard datetime features. It supports adding integers representing units of time directly to datetime values using the arithmetic plus operator. It also supports subtracting one `<datetime value expr>` from another in the given units of date or time using the minus operator. An example of `<datetime value expr> + <numeric value expression> <datetime field>` is `LOCALTIMESTAMP + 5 DAY`. An example of `(<datetime value expr> - <numeric value expression>) <datetime field>` is `(CURRENT_DATE - DATE '2008-08-8') MONTH` which returns the number of calendar months between the two dates.

The two JDBC functions, `TIMESTAMPADD` and `TIMESTAMPDIFF` perform a similar function to the above SQL expressions. The `<tsi datetime field>` names are keywords and are different from those used in the `EXTRACT` functions. These names are valid for use only when calling these two functions. With `TIMESTAMPDIFF`, the names indicate the unit of time used to compute the difference between two datetime fields. With `TIMESTAMPADD` they represent the unit of time used for the `<numeric value expression>`. The unit of time for each name is self-explanatory. In the case of `SQL_TSI_FRAC_SECOND`, the unit is nanosecond.

The return value for `TIMESTAMPADD` is of the same type as the datetime argument used. The return type for `TIMESTAMPDIFF` is always `BIGINT`, regardless of the type of arguments. The two datetime arguments of `TIMESTAMPDIFF` should be of the same type. The `TIME` type is not supported for the arguments to these functions.

`TIMESTAMPDIFF` is evaluated as `<datetime value expr 2> - <datetime value expr 1>`. (JDBC)

```
TIMESTAMPADD ( SQL_TSI_MONTH, 3, DATE '2008-11-22' )
TIMESTAMPDIFF ( SQL_TSI_HOUR, TIMESTAMP '2008-11-20 20:30:40', TIMESTAMP '2008-11-21 21:30:40' )
```

DATE_ADD

`DATE_ADD (<datetime value expr> , <interval value expr>)`

DATE_SUB

`DATE_SUB (<datetime value expr> , <interval value expr>)`

These functions are equivalent to arithmetic addition and subtraction, `<datetime value expr> + <interval value expr>` and `<datetime value expr> - <interval value expr>`. The functions are provided for compatibility with other databases. The supported interval units are the standard SQL interval unit listed in other chapters of this guide. The `TIME` type is supported for the argument to these functions. (HyperSQL)

```
DATE_ADD ( DATE '2008-11-22', INTERVAL 3 MONTH )
DATE_SUB ( TIMESTAMP '2008-11-22 20:30:40', INTERVAL 20 HOUR )
```

DATEADD

`DATEADD (<field>, <numeric value expr>, <datetime value expr>)`

DATEDIFF

`DATEDIFF (<field>, <datetime value expr 1>, <datetime value expr 2>)`

`<field> ::= 'yy' | 'year' | 'mm' | 'month' | 'dd' | 'day' | 'hh' | 'hour' | 'mi' | 'minute' | 'ss' | 'second' | 'ms' | 'millisecond'`

The `DATEADD` and `DATEDIFF` functions are alternatives to `TIMESTAMPADD` and `TIMESTAMPDIFF`, with fewer available field options. The field names are specified as strings, rather than keywords. The fields translate to `YEAR`, `MONTH`, `DAY`, `HOUR`, `MINUTE`, `SECOND` and `MILLISECOND`. `DATEDIFF` is evaluated as `<datetime value expr 2> - <datetime value expr 1>`. (HyperSQL)

```
DATEDIFF ( <datetime value expr 1>, <datetime value expr 2> )
```

This special form of DATEDIFF does not have a field parameter and return the number of days between two dates. This form is evaluated as <datetime value expr 1> - <datetime value expr 2>, which is different from the main form. This form is compatible with some other database engines. The TIME type is not supported for the arguments to these functions. (HyperSQL)

```
DATEADD ( 'month', 3, DATE '2008-11-22' )
DATEDIFF ( 'hour', TIMESTAMP '2008-11-22 20:30:40', TIMESTAMP '2008-11-22 00:30:40' )
```

ROUND

```
ROUND ( <datetime value expr> [ , <char value expr> ] )
```

The <datetime value expr> is of DATE, TIME or TIMESTAMP type. The <char value expr> is a format string for YEAR, MONTH, WEEK OF YEAR, DAY, HOUR, MINUTE or SECOND as listed in the table for TO_CHAR and TO_DATE format elements (see below). The datetime value is rounded up or down after the specified field and the rest of the fields to the right are set to one for MONTH and DAY, or zero, for the rest of the fields. For example rounding a timestamp value on the DAY field results in midnight the same date or midnight the next day if the time is at or after 12 noon. If the second argument is omitted, the datetime value is rounded to the nearest day. (HyperSQL)

TRUNC

```
TRUNC ( <datetime value expr> [ , <char value expr> ] )
```

Similar to the ROUND function, the <num value expr> is of DATE, TIME or TIMESTAMP type. The <char value expr> is a format string (such as 'YY' or 'MM') for YEAR, MONTH, WEEK OF YEAR, DAY, HOUR, MINUTE or SECOND as listed in the table for TO_CHAR and TO_DATE format elements (see below). The datetime value is truncated after the specified field and the rest of the fields to the right are set to one for MONTH and DAY, or zero, for the rest of the fields. For example applying TRUNC to a timestamp value on the DAY field results in midnight the same date. Examples of ROUND and TRUNC functions are given below. If the second argument is omitted, the datetime value is truncated to midnight the same date. (HyperSQL)

```
ROUND ( TIMESTAMP '2008-08-01 20:30:40', 'YYYY' )
TIMESTAMP '2009-01-01 00:00:00'
TRUNC ( TIMESTAMP '2008-08-01 20:30:40', 'YYYY' )
TIMESTAMP '2008-01-01 00:00:00'
```

Functions to Convert or Format a Datetime

TIMESTAMP

```
TIMESTAMP ( <num value expr> )
```

```
TIMESTAMP ( <char value expr> )
```

```
TIMESTAMP ( <char value expr>, <char value expr> )
```

```
TIMESTAMP ( <date value expr>, <time value expr> )
```

This function translates the arguments into a TIMESTAMP WITHOUT TIME ZONE value.

When the single argument is a numeric value, it is interpreted as a Unix timestamp in seconds.

When the single argument is a formatted date or timestamp string, it is translated to a `TIMESTAMP`.

When two arguments are used, the first argument is the date part and the second argument is the time part of the returned `TIMESTAMP` value. An example, including the result, is given below:

```
TIMESTAMP ( '2008-11-22', '20:30:40' )
TIMESTAMP '2008-11-22 20:30:40.000000'
```

TIMESTAMP_WITH_ZONE

`TIMESTAMP_WITH_ZONE` (<num value expr>)

`TIMESTAMP_WITH_ZONE` (<char value expr>)

This function translates the arguments into a `TIMESTAMP WITH TIME ZONE` value.

When the single argument is a numeric value, it is interpreted as a Unix timestamp in seconds.

When the single argument is `TIMESTAMP`, it is converted to `TIMESTAMP WITH TIME ZONE`.

The time zone of the returned value is the local time zone at the time of the timestamp argument. This accounts for daylight saving times. For example, if the local time zone was +4:00 at the time of the given Unix timestamp, the returned value is local timestamp at the time with time zone +4:00.

TO_CHAR

`TO_CHAR` (<datetime value expr>, <char value expr>)

This function formats a datetime or numeric value to the format given in the second argument. The format string can contain pattern elements from the list given below, plus punctuation and space characters. An example, including the result, is given below:

```
TO_CHAR ( TIMESTAMP'2008-02-01 20:30:40', 'YYYY BC MONTH, DAY HH' )
2008 AD February, Friday 8

TO_CHAR ( TIMESTAMP'2008-02-01 20:30:40', '"The Date is" YYYY BC MONTH, DAY HH' )
The Date is 2008 AD February, Friday 8
```

The format is internally translated to a `java.text.SimpleDateFormat` format string. Separator characters (space, comma, period, hyphen, colon, semicolon, forward slash) can be included between the pattern elements. Unsupported format strings should not be used. You can include a string literal inside the format string by enclosing it in double quotes (see the second example above). (HyperSQL)

TO_DATE

`TO_DATE` (<char value expr>, <char value expr>)

This function translates a formatted datetime sting to a `TIMESTAMP(0)` according to the format given in the second argument. See `TO_TIMESTAMP` below for further details.

TO_TIMESTAMP

`TO_TIMESTAMP` (<char value expr>, <char value expr>)

This function translates a formatted datetime sting to a `TIMESTAMP(6)` according to the format given in the second argument. The format string can contain pattern elements from the list given below, plus punctuation and space

characters. The pattern should contain all the necessary fields to construct a date, including, year, month, day of month, etc. The returned timestamp can then be cast into DATE or TIME types if necessary. An example, including the result, is given below:

```
TO_TIMESTAMP ( '22/11/2008 20:30:40', 'DD/MM/YYYY HH:MI:SS' )
TIMESTAMP '2008-11-22 20:30:40.000000'
```

The format strings that can be used for TO_DATE and TO_TIMESTAMP are more restrictive than those used for TO_CHAR, because the format string must contain the elements needed to build a full DATE or TIMESTAMP value. For example, you cannot use the 'WW', 'W', 'HH' or 'HH12' format elements with TO_DATE or TO_TIMESTAMP

The format is internally translated to a `java.text.SimpleDateFormat` format string. Unsupported format strings should not be used. With TO_CHAR, you can include a string literal inside the format string by enclosing it in double quotes. (HyperSQL)

The supported format components are all uppercase as follows:

Table 10.1. TO_CHAR, TO_DATE and TO_TIMESTAMP format elements

BC B.C. AD A.D.	Returns AD for common era and BC for before common era
RRRR	4-digit year
YYYY	4-digit year
IYYY	4-digit year, corresponding to ISO week of the year. The reported year for the last few days of the calendar year may be the next year.
YY	2 digit year
IY	2 digit year, corresponding to ISO week of the year
MM	Month (01-12)
MON	Short three-letter name of month
MONTH	Name of month
WW	Week of year (1-53) where week 1 starts on the first day of the year and continues to the seventh day of the year (not a calendar week).
W	Week of month (1-5) where week 1 starts on the first day of the month and ends on the seventh (not a calendar week).
IW	Week of year (1-52 or 1-53) based on the ISO standard. Week starts on Monday. The first week may start near the end of previous year.
DAY	Name of day.
DD	Day of month (01-31).
DDD	Day of year (1-366).
DY	Short three-letter name of day.
HH	Hour of day (00-11).
HH12	Hour of day (00-11).
HH24	Hour of day (00-23).
MI	Minute (00-59).
SS	Second (00-59).
FF	Fractional seconds.

Array Functions

Array functions are specialised functions with ARRAY parameters or return values. For the ARRAY_AGG aggregate function, see the [Data Access and Change](#) chapter.

CARDINALITY

```
CARDINALITY( <array value expr> )
```

Returns the element count for the given array argument. (Foundation)

MAX_CARDINALITY

```
MAX_CARDINALITY( <array value expr> )
```

Returns the maximum allowed element count for the given array argument. (Foundation)

POSITION_ARRAY

```
POSITION_ARRAY( <value expression> IN <array value expr> [ FROM <int value expr> ] )
```

Returns the position of the first match for the <value expression> in the array. By default the search starts from the beginning of the array. The optional <int value expr> specifies the start position. Positions are counted from 1. Returns zero if no match is found. (HyperSQL)

SORT_ARRAY

```
SORT_ARRAY( <array value expr> [ { ASC | DESC } ] [ NULLS { FIRST | LAST } ] )
```

Returns a sorted copy of the array. By default, sort is performed in ascending order and NULL elements are sorted first. (HyperSQL)

TRIM_ARRAY

```
TRIM_ARRAY( <array value expr>, <num value expr> )
```

Returns a new array that contains the elements of the <array value expr> minus the number of elements specified by the <num value expr>. Elements are discarded from the end of the array. (Foundation)

SEQUENCE_ARRAY

```
SEQUENCE_ARRAY( <value expr 1>, <value expr 2>, <value expr 3 > )
```

Returns a new array that contains a sequence of values. The <value expr 1> is the lower bound of the range. The <value expr 2> is the upper bound of the range. The <value expr 3> is the increment. The elements of the array are within the inclusive range. The first element is <value expr 1> and each subsequent element is the sum of the previous element and the increment. If the increment is zero, only the first element is returned. When the increment is negative, the lower bound should be larger than the upper bound. The type of the arguments can be all number types, or a datetime range and an interval for the third argument (HyperSQL)

In the examples below, a number sequence and a date sequence are shown. The UNNEST table expression is used to form a table from the array.

```
SEQUENCE_ARRAY(0, 100, 5)
ARRAY[0,5,10,15,20,25,30,35,40,45,50,55,60,65,70,75,80,85,90,95,100]
```

```

SELECT * FROM UNNEST(SEQUENCE_ARRAY(10, 12, 1))

C1
--
10
11
12

SELECT * FROM UNNEST(SEQUENCE_ARRAY(CURRENT_DATE, CURRENT_DATE + 6 DAY, 1 DAY)) WITH ORDINALITY
AS T(D, I)

D          I
-----
2010-08-01 1
2010-08-02 2
2010-08-03 3
2010-08-04 4
2010-08-05 5
2010-08-06 6
2010-08-07 7

```

General Functions

General functions can take different types of arguments. Some General Functions accept a variable number of arguments.

Also see the [Data Access and Change](#) chapter for SQL expressions that are similar to functions, for example CAST and NULLIF.

CASEWHEN

```
CASEWHEN( <boolean value expr>, <value expr 2>, <value expr 3> )
```

If the <boolean value expr> is true, returns <value expr 2> otherwise returns <value expr 3>. Use a CASE WHEN expression instead for more extensive capabilities and options. CASE WHEN is documented in the [Data Access and Change](#) chapter. (HyperSQL)

COALESCE

```
COALESCE( <value expr 1>, <value expr 2> [, ...] )
```

Returns <value expr 1> if it is not null, otherwise returns <value expr 2> if not null and so on. The type of both arguments must be comparable. (Foundation)

CONVERT

```
CONVERT ( <value expr> , <data type> )
```

```
<data type> ::= { SQL_BIGINT | SQL_BINARY | SQL_BIT | SQL_BLOB | SQL_BOOLEAN
| SQL_CHAR | SQL_CLOB | SQL_DATE | SQL_DECIMAL | SQL_DATALINK | SQL_DOUBLE |
SQL_FLOAT | SQL_INTEGER | SQL_LONGVARIABLE | SQL_LONGNVARCHAR | SQL_LONGVARCHAR
| SQL_NCHAR | SQL_NCLOB | SQL_NUMERIC | SQL_NVARCHAR | SQL_REAL | SQL_ROWID
| SQL_SQLXML | SQL_SMALLINT | SQL_TIME | SQL_TIMESTAMP | SQL_TINYINT |
SQL_VARBINARY | SQL_VARCHAR} [ ( <precision, length or scale parameters> ) ]
```

The CONVERT function is a JDBC escape function, equivalent to the SQL standard CAST expression. It converts the <value expr> into the given <data type> and returns the value. The <data type> options are synthetic names made by prefixing type names with SQL_. Some of the <data type> options represent valid SQL types, but some are based on non-standard type names, namely { SQL_LONGNVARCHAR | SQL_LONGVARIABLE |

SQL_LONGVARCHAR | SQL_TINYINT }. None of the synthetic names can be used in any other context than the CONVERT function.

The definition of CONVERT in the JDBC Standard does not allow the precision, scale or length to be specified. This is required by the SQL standard for BINARY, BIT, BLOB, CHAR, CLOB, VARBINARY and VARCHAR types and is often needed for DECIMAL and NUMERIC. Defaults are used for precision.

HyperSQL also allows the use of real type names (without the SQL_ prefix). In this usage, HyperSQL allows the use of precision, scale or length for the type definition when they are valid for the type definition.

When MS SQL Server compatibility mode is on, the parameters of CONVERT are switched and only the real type names with required precision, scale or length are allowed. (JDBC)

DECODE

```
DECODE( <value expr main>, <value expr match 1>, <value expr result 1> [...,]
[, <value expr default>] )
```

DECODE takes at least 3 arguments. The <value expr main> is compared with <value expr match 1> and if it matches, <value expr result 1> is returned. If there are additional pairs of <value expr match n> and <value expr result n>, comparison is repeated until a match is found the result is returned. If no match is found, the <value expr default> is returned if it is specified, otherwise NULL is returned. The type of the return value is a combination of the types of the <value expr result ... > arguments. (HyperSQL)

GREATEST

```
GREATEST( <value expr 1>, [<value expr ...>, ...] )
```

The GREATEST function takes one or more arguments. It compares the arguments with each other and returns the greatest argument. The return type is the combined type of the arguments. Arguments can be of any type, so long as they are comparable. (HyperSQL)

IFNULL

ISNULL

```
IFNULL | ISNULL ( <value expr 1>, <value expr 2> )
```

Returns <value expr 1> if it is not null, otherwise returns <value expr 2>. The type of the return value is the type of <value expr 1>. Almost equivalent to SQL Standard COALESCE(<value expr 1>, <value expr 2>) function, but without type modification. (JDBC)

LEAST

```
LEAST( <value expr 1>, [<value expr ...>, ...] )
```

The LEAST function takes one or more arguments. It compares the arguments with each other and returns the smallest argument. The return type is the combined type of the arguments. Arguments can be of any type, so long as they are comparable. (HyperSQL)

LOAD_FILE

```
LOAD_FILE ( <char value expr 1> [, <char value expr 2>] )
```

Returns a BLOB or CLOB containing the URL or file path specified in the first argument. If used with a single argument, the function returns a BLOB. If used with two arguments, the function returns a CLOB and the second argument is the character encoding of the file.

The file path is interpreted the same way as a TEXT TABLE source file location. The `hsqldb.allow_full_path` system property must be set `true` in order to access files outside the directory structure of the database files.

(HyperSQL)

NULLIF

NULLIF(<value expr 1>, <value expr 2>)

Returns <value expr 1> if it is not equal to <value expr 2>, otherwise returns null. The type of both arguments must be the same. This function is a shorthand for a specific CASE expression. (Foundation)

NVL

NVL(<value expr 1>, <value expr 2>)

Returns <value expr 1> if it is not null, otherwise returns <value expr 2>. The type of the return value is the type of <value expr 1>. For example, if <value expr 1> is an INTEGER column and <value expr 2> is a DOUBLE constant, the return type is cast into INTEGER. This function is similar to IFNULL. (HyperSQL)

NVL2

NVL2(<value expr 1>, <value expr 2>, <value expr 3>)

If <value expr 1> is not null, returns <value expr 2>, otherwise returns <value expr 3>. The type of the return value is the type of <value expr 2> unless it is null. (HyperSQL)

UUID

UUID ([{ <char value expr> | <binary value expr> }])

With no parameter, this function returns a new UUID value as a 16 byte binary value. With a UUID hexadecimal string argument, it returns the 16 byte binary value of the UUID. With a 16 byte binary argument, it returns the formatted UUID character representation. (HyperSQL)

System Functions

CRYPT_KEY

CRYPT_KEY(<value expr 1>, <value expr 2>)

Returns a binary string representation of a cryptography key for the given cipher and cryptography provider. The cipher specification is specified by <value expr 1> and the provider by <value expr 2>. To use the default provider, specify null for <value expr 2>. (HyperSQL)

DIAGNOSTICS

DIAGNOSTICS (ROW_COUNT)

This is a convenience function for use instead of the `GET DIAGNOSTICS . . .` statement. The argument specifies the name of the diagnostics variable. Currently the only supported variable is the `ROW_COUNT` variable. The function returns the row count returned by the last executed statement. The return value is 0 after most statements. Calling this function immediately after executing an `INSERT`, `UPDATE`, `DELETE` or `MERGE` statement returns the row count for the last statement, as it is returned by the JDBC statement. (HyperSQL)

IDENTITY

IDENTITY ()

Returns the last **IDENTITY** value inserted into a row by the current session. The statement, **CALL IDENTITY()** can be made after an **INSERT** statement that inserts a row into a table with an **IDENTITY** column. The **CALL IDENTITY()** statement returns the last **IDENTITY** value that was inserted into a table by the current session. Each session manages this function call separately and is not affected by inserts in other sessions. The statement can be executed as a direct statement or a prepared statement. (HyperSQL)

DATABASE**DATABASE ()**

Returns the file name (without directory information) of the database. (JDBC)

DATABASE_NAME**DATABASE_NAME ()**

Returns the database name. This name is a 16 character, uppercase string. It is generated as a string based on the timestamp of the creation of the database, for example **HSQLDB32438AEAFB**. The name can be redefined by an admin user but the new name must be all uppercase and 16 characters long. This name is used in log messages with external logging frameworks. (HyperSQL)

DATABASE_VERSION**DATABASE_VERSION ()**

Returns the full version string for the database engine. For example, 2.0.1. (JDBC)

USER**USER ()**

Equivalent to the SQL function **CURRENT_USER**. (JDBC)

CURRENT_USER**CURRENT_USER****CURRENT_ROLE****CURRENT_ROLE****SESSION_USER****SESSION_USER****SYSTEM_USER****SYSTEM_USER****CURRENT_SCHEMA****CURRENT_SCHEMA****CURRENT_CATALOG****CURRENT_CATALOG**

These functions return the named current session attribute. They are all SQL Standard functions.

The `CURRENT_USER` is the user that connected to the database, or a user subsequently set by the `SET AUTHORIZATION` statement.

`SESSION_USER` is the same as `CURRENT_USER`

`SYSTEM_USER` is the user that connected to the database. It is not changed with any command until the session is closed.

`CURRENT_SCHEMA` is default schema of the user, or a schema subsequently set by the `SET SCHEMA` command.

`CURRENT_CATALOG` is always the same within a given HyperSQL database and indicates the name of the catalog.

IS_AUTOCOMMIT

`IS_AUTOCOMMIT()`

Returns TRUE if the session is in autocommit mode. (HyperSQL)

IS_READONLY_SESSION

`IS_READONLY_SESSION()`

Returns TRUE if the session is in read only mode. (HyperSQL)

IS_READONLY_DATABASE

`IS_READONLY_DATABASE()`

Returns TRUE if the database is a read only database. (HyperSQL)

IS_READONLY_DATABASE_FILES

`IS_READONLY_DATABASE_FILES()`

Returns TRUE if the database is a read-only files database. In this kind of database, it is possible to modify the data, but the changes are not persisted to the database files. (HyperSQL)

ISOLATION_LEVEL

`ISOLATION_LEVEL()`

Returns the current transaction isolation level for the session. Returns either `READ COMMITTED` or `SERIALIZABLE` as a string. (HyperSQL)

SESSION_ID

`SESSION_ID()`

Returns the id of the session as a `BIGINT` value. Each session id is unique during the operational lifetime of the database. Id's are restarted after a shutdown and restart. (HyperSQL)

SESSION_ISOLATION_LEVEL

`SESSION_ISOLATION_LEVEL()`

Returns the default transaction isolation level for the current session. Returns either `READ COMMITTED` or `SERIALIZABLE` as a string. (HyperSQL)

DATABASE_ISOLATION_LEVEL

DATABASE_ISOLATION_LEVEL()

Returns the default transaction isolation level for the database. Returns either READ COMMITTED or SERIALIZABLE as a string. (HyperSQL)

TRANSACTION_SIZE

TRANSACTION_SIZE()

Returns the row change count for the current transaction. Each row change represents a row INSERT or a row DELETE operation. There will be a pair of row change operations for each row that is updated.

TRANSACTION_ID

TRANSACTION_ID()

Returns the current transaction ID for the session as a BIGINT value. The database maintains a global incremental id which is allocated to new transactions and new actions (statement executions) in different sessions. This value is unique to the current transaction. (HyperSQL)

ACTION_ID

ACTION_ID()

Returns the current action ID for the session as a BIGINT value. The database maintains a global incremental id which is allocated to new transactions and new actions (statement executions) in different sessions. This value is unique to the current action. (HyperSQL)

TRANSACTION_CONTROL

TRANSACTION_CONTROL()

Returns the current transaction model for the database. Returns LOCKS, MVLOCKS or MVCC as a string. (HyperSQL)

LOB_ID

LOB_ID(<column reference>)

Returns internal ID of a lob as a BIGINT value. Lob ID's are unique and never reused. The <column reference> is the name of the column (or variable, or argument) which is a CLOB or BLOB. Returns null if the value is null. (HyperSQL)

ROWNUM

ROWNUM()

ROW_NUMBER

ROW_NUMBER() OVER()

Returns the current row number (from 1) being processed in a select statement. This has the same semantics as the ROWNUM pseudo-column in Oracle syntax mode, but can be used in any syntax mode. The function is used in a SELECT or DELETE statement. The ROWNUM of a row is incremented as the rows are added to the result set. It is therefore possible to use a condition such as WHERE ROWNUM() < 10, but not ROWNUM() > 10 or ROWNUM = 10. The ROW_NUMBER() OVER() alternative performs the same function and is included for compatibility with other database engines. (HyperSQL)

Chapter 11. System Management

Fred Toussi, The HSQL Development Group

\$Revision: 5579 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Mode of Operation and Tables

HyperSQL has many modes of operation and features that allow it to be used in very different scenarios. Levels of memory usage, speed and accessibility by different applications are influenced by how HyperSQL is deployed.

Mode of Operation

The decision to run HyperSQL as a separate server process or as an *in-process* database should be based on the following:

- When HyperSQL is run as a server on a separate machine, it is isolated from hardware failures and crashes on the hosts running the application.
- When HyperSQL is run as a server on the same machine, it is isolated from application crashes and memory leaks.
- Server connections are slower than *in-process* connections due to the overhead of streaming the data for each JDBC call.
- You can reduce client/server traffic using SQL Stored procedures to reduce the number of JDBC execute calls.
- During development, it is better to use a Server with `server.silent=false`, which displays the statements sent to the server on the console window.
- To improve speed of execution for statements that are executed repeatedly, reuse a parameterized `PreparedStatement` for the lifetime of the connections.

Database Types

There are three types of database, `mem:`, `file:` and `res:`. The `mem:` type is stored all in memory and not persisted to file. The `file:` type is persisted to file. The `res:` type is also based on files, but the files are loaded from the classpath, similar to resource and class files. Changes to the data in `file:` databases are persisted, unless the database is `readonly`, or `files_readonly` (using optional property settings). Changes to `res:` databases are not persisted.

Readonly Databases

A *file:* catalog can be made readonly permanently, or it can be opened as readonly. To make the database readonly, the property, value pair, `readonly=true` can be added to the `.properties` file of the database. The `SHUTDOWN` command must be used to close the database before making this change.

It is also possible to open a normal database as readonly. For this, the property can be included in the URL of the first connection to the database.

With readonly databases, it is still possible to insert and delete rows in TEMP tables.

RES and Files Readonly Databases

There is another option which allows MEMORY tables to be writeable, but without persisting the changes at SHUTDOWN. This option is activated with the property, value pair, `files_readonly=true`, which can be added to the `.properties` file of the database, or included in the URL of the first connection to the database.

A *res:* catalog, is a set of database files on the classpath (inside a jar or alongside class files). The database is opened with a URL in the form of `jdbc:hsqldb:res:<database path>`. These databases are always `files_readonly` and have the same restrictions as `files_readonly file:` catalogs.

CACHED tables and LOBS in these catalogs are readonly. It is not possible to create new LOBs in these catalogs, but you can use existing LOBs in new rows.

These options are useful for running application tests which operate on a predefined dataset.

Tables

TEXT tables are designed for special applications where the data has to be in an interchangeable format, such as CSV (comma separated values). TEXT tables should not be used for routine storage of data that changes a lot.

MEMORY tables and CACHED tables are generally used for data storage. The difference between the two is as follows:

- The data for all MEMORY tables is read from the *.script file when the database is started and stored in memory. In contrast the data for cached tables is not read into memory until the table is accessed. Furthermore, only part of the data for each CACHED table is held in memory, allowing tables with more data than can be held in memory.
- When the database is shutdown in the normal way, all the data for MEMORY tables is written out to the disk. In comparison, the data in CACHED tables that has changed is written out during operation and at shutdown.
- The size and capacity of the data cache for all the CACHED tables is configurable. This makes it possible to allow all the data in CACHED tables to be cached in memory. In this case, speed of access is good, but slightly slower than MEMORY tables.
- For normal applications it is recommended that MEMORY tables are used for small amounts of data, leaving CACHED tables for large data sets. For special applications in which speed is paramount and a large amount of free memory is available, MEMORY tables can be used for large tables as well.
- You can change the type of the table with the `SET TABLE <table name> TYPE { CACHED | MEMORY }statement`.

Large Objects

HyperSQL 2.0 supports dedicated storage and access to BLOB and CLOB objects. These objects can have huge sizes. BLOB or CLOB is specified as the type of a column of the table. Afterwards, rows can be inserted into the table using a PreparedStatement for efficient transfer of large LOB data to the database. In *mem:* catalogs, CLOB and BLOB data is stored in memory. In *file:* catalogs, this data is stored in a single separate file which has the extension *.lobs. The size of this file can grow to huge, terabyte figures. By default, a minimum 32 KB is allocated to each LOB. You can reduced this if your LOBs are generally smaller.

LOB data should be stored in the database using a JDBC PreparedStatement object. The streaming methods send the LOB to the database in one operation as a binary or character stream. Inside the database, the disk space is allocated

as needed and the data is saved as it is being received. LOB data should be retrieved from the database using a JDBC ResultSet method. When a streaming method is used to retrieve a LOB, it is retrieved in large chunks in a transparent manner. LOB data can also be retrieved as String or byte[], but these methods use more memory and may not be practical for large objects.

LOB data is not duplicated in the database when a lob is copied from one table to another. The disk space is reused when a LOB is deleted and is no longer contained in any table. This happens only at the time of a CHECKPOINT.

By using a dedicated LOB store, HyperSQL achieves consistently high speeds (usually over 20MB / s) for both storage and retrieval of LOBs.

There is an internal LOBS schema in the database to store the id's, sizes and addresses of the LOBs (but not the actual LOBS) in a few system tables. This schema is stored in the database as MEMORY tables. Therefore the amount of JVM memory should be increased when more than tens of thousands of LOBs are stored in the database. If your database contains more than a few hundreds of thousands of LOBs and memory use becomes an issue, you can change one or all LOB schema tables to CACHED tables. See statements below:

Example 11.1. Using CACHED tables for the LOB schema

```
SET TABLE SYSTEM_LOBS.BLOCKS TYPE CACHED
SET TABLE SYSTEM_LOBS.LOBS TYPE CACHED
SET TABLE SYSTEM_LOBS.PARTS TYPE CACHED
SET TABLE SYSTEM_LOBS.LOB_IDS TYPE CACHED
```

Deployment context

The files used for storing HyperSQL database data are all in the same directory. New files are always created and deleted by the database engine. Two simple principles must be observed:

- The Java process running HyperSQL must have full privileges on the directory where the files are stored. This include create and delete privileges.
- The file system must have enough spare room both for the 'permanent' and 'temporary' files. The default maximum size of the *.log file is 50MB. The *.data file can grow to up to 64GB (more if the default has been increased). The .backup file can be up to the size of the *.data file. The *.lobs file can grow to several terabytes. The temporary files created at the time of a SHUTDOWN can be equal in size to the *.script file and the .data file.
- In desktop deployments, virus checker programs may interfere with the creation and modification of database files. You should exclude the directory containing the database files from virus checking.

ACID, Persistence and Reliability

HyperSQL's persistence mechanism has proven reliable, as the last critical issue was fixed 2 years before the release of version 2.0.

There are further enhancements in version 2.3.4

- More extensive locking mechanism has been added to code to support multithreaded access.
- Incremental backup (an internal mechanism for crash protection) allows fast checkpoint and shutdown.
- All files are synced at checkpoints and also just before closing.
- The data file is enlarged in block increments

- The NIO file access implementation has been improved

Persistence relies on the JVM, the operating system, and the computer hardware. A database system like HSQLDB can perform millions of read and write operations in an hour. As system hardware and software can go wrong, it is impossible to achieve zero failure rate. Therefore regular backups are recommended. HyperSQL 2.3 has built-in database backup and restore features, discussed elsewhere in this chapter.

A note regarding the NIO file access implementation: This implementation applies only to CACHED table data in the `.data` file. Other files are not accessed via NIO. There has been an issue with some JVM implementations of nio not releasing the file buffers after they were closed. HyperSQL uses a workaround which is recommended for Sun JVM's. This does not apply to other JVM's. In such environments, it is therefore recommended to test the CHECKPOINT DEFrag operation and the shutting down and restarting the database inside the same Java process extensively with NIO. Use of NIO is not essential and can be turned off if necessary.

Atomicity, Consistency, Isolation, Durability

Atomicity means a transaction either fails without changing the data, or succeeds. HyperSQL ensures atomicity both during operations and in the event of a system crash.

Consistency means all the implicit and explicit integrity constraints are always enforced. HyperSQL always enforces the constraints and at the same time does not allow unenforceable constraints (illegal forms of CHECK constraints) to be created.

Isolation means transactions do not interfere with each other. HyperSQL enforces isolation according to strict rules of the database isolation model (MVCC or LOCKS).

Durability means a committed transaction is protected in case of a system crash. HyperSQL ensures durability according to the setting for WRITE DELAY MILLIS. A zero delay setting results in an `FileDescriptor#sync()` call each time a transaction commits. A timed delay means the `FileDescriptor#sync()` call is executed in the given intervals and only the last transactions committed in the time interval may be lost. The default time interval is 0.5 second. The `sync()` call is also made at all critical points, including when a file is about to be closed. Durability of files requires a reliable JVM and disk storage system that stores the data safely with a `sync()` call. In practice, many systems are generally reliable in this respect.

System Operations

A database is opened when the first connection is successfully made. It remains open until the SHUTDOWN command is issued. If the connection property `shutdown=true` is used for the first connection to the database, the database is shutdown when the last connection is closed. Otherwise the database remains open and will accept the next connection attempt.

The SHUTDOWN command shuts down the database properly and allows the database to be reopened quickly. This command may take some seconds as it saves all the modified data in the `.script` and `.data` files. Variants of SHUTDOWN such as SHUTDOWN COMPACT and SHUTDOWN SCRIPT can be used from time to time to reduce the overall size of the database files. Another variant is SHUTDOWN IMMEDIATELY which ensures all changes to data are stored in the `.log` file but does not save the changes in `.script` and `.data` files. The shutdown is performed quickly but the database will take much longer to reopen.

During the lifetime of the database the checkpoint operation may be performed from time to time. The SET FILES LOG SIZE < value > setting and its equivalent URL property determine the frequency of automatic checkpoints. An online backup also performs a checkpoint when the backup is not a hot backup. A checkpoint can be performed by the user at any time using the CHECKPOINT statement. The main purpose of checkpoints is to reduce the total size of database files and to allow a quick restart in case the database is closed without a proper shutdown. The CHECKPOINT DEFrag variant compacts the `.data` file in a similar way to SHUTDOWN COMPACT does. Obviously this variant

takes much longer than a normal CHECKPOINT. A database setting allows a CHECKPOINT DEFrag to be performed automatically when wasted space in the .data file exceeds the specified percentage.

In a multi-user application, automatic or user-initiated checkpoints are delayed until all other sessions have committed or rolled back. During a checkpoint, other sessions cannot access the database tables but can access the INFORMATION_SCHEMA system tables.

Backing Up and Restoring Database Catalogs

The database engine saves the files containing all the data in a file catalog when a shutdown takes place. It automatically recovers from an abnormal termination and preserves the data when the catalog is opened next time. In an ideal operating environment, where there is no OS crash, disk failure, bugs in code, etc. there would be no need to backup a database. Backing up catalogs is an insurance policy against all sorts of misadventure that are not under the control of the database engine.

The data for each catalog consists of up to 5 files in the same directory with the endings such as *.properties, *.script, etc., as detailed in previous chapters.

HyperSQL 2 includes commands to backup the database files into a single .tar or .tar.gz file archive, or alternatively as copies of the database files. The backup can be performed by a command given in a JDBC session if the target database catalog is running, or on the command-line if the target catalog has been shutdown.

It is not recommended to backup the database file with an external file backup program while the database is running. The resulting backup will probably be inconsistent and not useful for restoring the database

Making Online Backups

To back up a running catalog, obtain a JDBC connection and issue a BACKUP DATABASE command in SQL. In its most simple form, the command format below will backup the database as a single .tar.gz file to the given directory. This type of backup performs a checkpoint immediately before backing up the files.

```
BACKUP DATABASE TO <directory name> BLOCKING [ AS FILES ]
```

The *directory name* must end with a slash to distinguish it as a directory, and the whole string must be in single quotes like so: 'subdir/nestaddir/'.

Normal backup may take a long time with very large databases. Hot backup may be used in those situations. This type of backup does not perform a checkpoint and allows access to the database while backup is in progress.

```
BACKUP DATABASE TO <directory name> NOT BLOCKING [ AS FILES ]
```

If you add AS FILES to the statements, the database files are backed up as separate files in the directory, without any gzip compression or tar archiving.

See the next section under Statements for details about the command and its options. See the sections below about restoring a backup.

Offline Backup Utility Syntax

The DbBackup class is used from the command-line to make offline backups and to restore backups. Here is how to see all options for DbBackup.

Example 11.2. Displaying DbBackup Syntax

```
java -cp hsqldb.jar org.hsqldb.lib.tar.DbBackupMain
```

Making Offline Backups

To back up an offline catalog, the catalog must be in shut down state. You will run a Java command like this. In this example, the database is named `dbname` and is in the `dbdir` directory. The backup is saved to a file named `backup.tar` in the `tardir` directory.

Example 11.3. Offline Backup Example

```
java -cp hsqldb.jar org.hsqldb.lib.tar.DbBackupMain --save tardir/backup.tar dbdir/dbname
```

where `tardir/backup.tar` is a file path to the `*.tar` or `*.tar.gz` file to be created in your file system, and `dbdir/dbname` is the file path to the catalog file base name (in same fashion as in `server.database.*` settings and JDBC URLs with catalog type *file*).

Examining Backups

You can list the contents of backup tar files with `DbBackup` on your operating system command line, or with any Pax-compliant tar or pax client (this includes GNU tar),

Example 11.4. Listing a Backup with DbBackup

```
java -cp hsqldb.jar org.hsqldb.lib.tar.DbBackupMain --list tardir/backup.tar
```

You can also give regular expressions at the end of the command line if you are only interested in some of the file entries in the backup. Note that these are real regular expressions, not shell globbing patterns, so you would use `.+script` to match entries ending in "script", not `*script`.

You can examine the contents of the backup in their entirety by restoring the backup, as explained in the following section, to a temporary directory.

Restoring a Backup

You use `DbBackup` on your operating system command line to restore a catalog from a backup.

Example 11.5. Restoring a Backup with DbBackup

```
java -cp hsqldb.jar org.hsqldb.lib.tar.DbBackupMain --extract tardir/backup.tar dbdir
```

where `tardir/backup.tar` is a file path to the `*.tar` or `*.tar.gz` file to be read, and `dbdir` is the target directory to extract the catalog files into. Note that `dbdir` specifies a directory path, without the catalog file base name. The files will be created with the names stored in the tar file (and which you can see as described in the preceding section). After restoring the database, you can connect to it as usual.

Encrypted Databases

HyperSQL supports encrypted databases. Encryption services use the Java Cryptography Extensions (JCE) and uses the ciphers installed with the JRE. HyperSQL itself does not contain any cryptography code.

Three elements are involved in specifying the encryption method and key. A cipher, together with its configuration is identified by a string which includes the name of the cipher and optional parameters. A provider is the fully qualified class name of the cipher provider. A key is represented as a hexadecimal string.

Creating and Accessing an Encrypted Database

First, a key must be created for the desired cipher and configuration. This is done by calling the function `CRYPT_KEY(<cipher spec>, <provider>)`. If the default provider (the built-in JVM ciphers) is used, then `NULL`

should be specified as the provider. The CRYPT_KEY function returns a hexadecimal key. The function call can be made in any HyperSQL database, so long as the provider class is on the classpath. This key can be used to create a new encrypted database. Calls to this function always return different keys, based on a generated random values.

As an example, a call to CRYPT_KEY('Blowfish', null) returned the string, '604a6105889da65326bf35790a923932'. To create a new database, the URL below is used:

```
jdbc:hsqldb:file:<database  
path>;crypt_key=604a6105889da65326bf35790a923932;crypt_type=blowfish
```

The third property name is crypt_provider. This is specified only when the provider is not the default provider.

HyperSQL works with any symmetric cipher that may be available from the JVM.

The files that are encrypted include the .script, .data, .backup and .log files. The .lobs file is not encrypted by default. The property crypt_lob=true must be specified to encrypt the .lobs file. When this property is used, the blobs and clobs are both compressed and encrypted.

Speed Considerations

General operations on an encrypted database are performed the same as with any database. However, some operations are significantly slower than with the equivalent cleartext database. With MEMORY tables, there is no difference to the speed of SELECT statements, but data change statements are slower. With CACHED tables, the speed of all statements is slower.

Security Considerations

Security considerations for encrypted databases have been discussed at length in HSQLDB discussion groups. Development team members have commented that encryption is not a panacea for all security needs. The following issues should be taken into account:

- Encrypted files are relatively safe in transport, but because databases contain many repeated values and words, especially known tokens such as CREATE, INSERT, etc., breaking the encryption of a database may be simpler than an unknown file.
- Only the files are encrypted, not the memory image. Poking into computer memory, while the database is open, will expose the contents of the database.
- HyperSQL is open source. Someone who has the key, can compile and use a modified version of the program that saves a full cleartext dump of an encrypted database

Therefore encryption is generally effective only when the users who have access to the crypt key are trusted.

Monitoring Database Operations

Database operations can be monitored at different levels using internal HyperSQL capabilities or add-ons.

External Statement Level Monitoring

Statement level monitoring allows you to gather statistics about executed statements. HyperSQL is supported by the monitoring tool JAMon (Java Application Monitor). JAMon is currently developed as the SourceForge project, jamonapi.

JAMon works at the JDBC level. It can monitor and gather statistics on different types of executed statements or other JDBC calls.

Early versions of JAMon were developed with HSQLDB and had to be integrated into HSQLDB at code level. The latest versions can be added on as a proxy in a much simpler fashion.

Internal Statement Level Monitoring

The internally-generated, individual sql log for the database can be enabled with the `SET DATABASE EVENT LOG SQL LEVEL` statement, described in this chapter. As all the executed statements are logged, there is an impact on speed. So you should only use this for debugging. Two levels of sql logging are supported.

Internal Event Monitoring

HyperSQL can log important internal events of the engine. These events occur during the operation of the engine, and are not always coupled with the exact type of statement being executed. Normal events such as opening and closing of files, or errors such as OutOfMemory conditions are examples of logged events.

HyperSQL supports two methods of logging. One method is specific to the individual database and is managed internally by HyperSQL. The other method is specific to JVM and is managed by a logging framework.

The internally-generated, individual log for the database can be enabled with the `SET DATABASE EVENT LOG LEVEL` statement, described in this chapter. This method of logging is very useful for desktop application deployment, as it provides an ongoing record of database operations.

Log4J and JDK logging

HyperSQL also supports log4J and JDK logging. The same event information that is passed to the internal log, is passed to external logging frameworks. These frameworks are typically configured outside HyperSQL. The log messages include the string "hsqldb.db." followed by the unique id (a 16 character string) of the database that generated the message, so they can be identified in a multi-database server context.

As the default JDK logging framework has several shortcomings, HyperSQL configures this logging framework for better operation. If you do not want HyperSQL to configure the JDK logging framework, you should include the system level property `hsqldb.reconfig_logging=false` in your environment.

Server Operation Monitoring

A Server or WebServer instance can be started with the property `server.silent=false`. This causes all the connections and their executed statements to be printed to stdout as the statements are submitted to the server.

Database Security

HyperSQL has extensive security features which are implemented at different levels and covered in different chapters of this guide.

1. The server can use SSL and IP address access control lists. See the [HyperSQL Network Listeners \(Servers\)](#) chapter.
2. You can define a system property to stop the database engine accessing the Java static functions that are on the classpath, apart from a limited set that you allow. See [Securing Access to Classes in the SQL-Invoked Routines](#) chapter.
3. You can define a system property to allow access to files on the file system outside the database directory and its children. This access is only necessary if you use TEXT tables. See the [Text Tables](#) chapter.
4. The database files can be encrypted. Discussed in this chapter.
5. Within the database, the DBA privileges are required for system and maintenance jobs.

6. You can define users and roles and grant them access on different database objects. Each user has a password and is granted a set of privileges. See the [Access Control](#) chapter.
7. You can define a password complexity check function for new and changed passwords. This is covered below under [Authentication Settings](#).
8. You can use external authentication instead of internally stored password to authenticate users for each database. This is covered below under [Authentication Settings](#).

HyperSQL security is multi-layered and avoids any loopholes to circumvent security. It is however the user's responsibility to enable the required level of security.

Security Defaults

The default settings are generally adequate for most embedded use of the database or for servers on the host that are accessed from the same machine. For servers accessed within a network, and especially for those accessed from outside the network, additional security settings must be used.

The default settings for server and web server do not use SSL or IP access control lists. These features are enabled programmatically, or with the properties used to start the server.

The default settings allow a database user with the DBA role or with schema creation role to access static functions on the classpath. You can disable this feature or limit it to specific classes and methods. This can be done programmatically or by setting a system property when you start a server.

If access to specific static functions is granted, then these functions must be considered as part of the database program and checked for any security flaws before inclusion in the classpath.

The default settings do not allow a user to access files outside the database directory. This access is for TEXT table source files. You can override this programmatically or with a system property when you start a server.

The encryption of database file does not utilise any user-supplied information for encryption keys. This level of security is outside the realm of users and passwords.

The first user for a new database has the DBA role. This user name was always SA in older versions of HSQLDB, but not in the latest versions. The name of the first DBA user and its password can be specified when the database is created by the first connection to the database. These settings are then stored in the database.

The initial user with the DBA role should be used for admin purposes only. At least one additional role should be created for normal database use in the application and at least one additional user should be created and granted this role. The new role should not be given the DBA role. It can be given the CREATE_SCHEMA role, which allows it to create and access multiple schemas. Alternatively, the user with the DBA role can create the schemas and their objects and then grant specific privileges on the objects to the non-DBA role.

Authentication Control

Authentication is the mechanism that determines if a user can access the database at all. Once authentication is performed, the authorization mechanism is used to determine which database objects the particular user can access. The default authentication mechanism is password authentication. Each user is created with a password, which is stored in the database and checked each time a new database connection is created.

Password Complexity Check

HyperSQL allows you to define a function that checks the quality of the passwords defined in the database. The passwords are stored in the database. Each time a user connects, the user's name and password are checked against the stored list of users and passwords. The connection attempt is rejected if there is no match.

External Authentication

You can use an external authentication mechanism instead of the internal authentication mechanism. HyperSQL allows you to define a function that checks the combination of database unique name, user name, and password for each connection attempt. The function can use external resources to authenticate the user. For example, a directory server may be used. The password may be ignored if the external resource can verify the user's credential without it.

You can override external authentication for a user with the ALTER USER statement. See the [Access Control](#) chapter

Statements

System level statements are listed in this section. Statements that begin with SET DATABASE or SET FILES are for properties that have an effect on the normal operation of HyperSQL. The effects of these statements are also discussed in different chapters.

System Operations

These statements perform a system level action.

SHUTDOWN

shutdown statement

```
<shutdown statement> ::= SHUTDOWN [IMMEDIATELY | COMPACT | SCRIPT]
```

Shutdown the database. If the optional qualifier is not used, a normal SHUTDOWN is performed. A normal SHUTDOWN ensures all data is saved correctly and the database opens without delay on next use.

SHUTDOWN	Normal shutdown saves all the database files, then deletes the .log file (and the .backup file in the default mode). This does the same thing as CHECKPOINT, but closes the database when it completes. The database opens without delay on next used.
SHUTDOWN IMMEDIATELY	Saves the *.log file and closes the database files. This is the quickest form of shutdown. This command should not be used as the routine method of closing the database, because when the database is accessed next time, it may take a long time to start.
SHUTDOWN COMPACT	This is similar to normal SHUTDOWN, but reduces the *.data file to its minimum size. It can take much longer than normal SHUTDOWN. This shouldn't be used as routine.
SHUTDOWN SCRIPT	This is similar to SHUTDOWN COMPACT, but it does not rewrite the *.data and text table files. After SHUTDOWN SCRIPT, only the *.script and *.properties files remain. At the next startup, these files are processed and the *.data file is created if there are cached tables. This command in effect performs part of the job of SHUTDOWN COMPACT, leaving the other part to be performed automatically at the next startup.
	This command produces a full script of the database which can be edited for special purposes prior to the next startup.

Only a user with the DBA role can execute this statement.

BACKUP DATABASE

backup database statement

```
<backup database statement> ::= BACKUP DATABASE TO <file path> [SCRIPT] {[NOT] COMPRESSED} {[NOT] BLOCKING} [AS FILES]
```

Backup the database to specified <file path> for archiving purposes.

The <file path> can be in two forms. If the <file path> ends with a forward slash, it specifies a directory. In this case, an automatic name for the archive is generated that includes the date, time and the base name of the database. The database is backed up to this archive file in the specified directory. The archive is in .tar.gz or .tar format depending on whether it is compressed or not.

If the <file path> does not end with a forward slash, it specifies a user-defined file name for the backup archive. The file extension must be either .tar.gz or .tar and this must match the compression option.

The default set of options is COMPRESSED BLOCKING.

If SCRIPT is specified, the backup will contain a *.script file, which contain all the data and settings of the database. This type of backup is suitable for smaller databases. With larger databases, this takes a long time. When the SCRIPT option is not used, the backup set will consist of the current snapshot of all database files.

If NOT COMPRESSED is specified, the backup is a tar file, without compression. Otherwise, it is in gzip format.

The qualifier, BLOCKING, means all database operations are suspended during backup. During backup, a CHECKPOINT command is silently executed. This mode is always used when SCRIPT is specified.

Hot backup is performed if NOT BLOCKING is specified. In this mode, the database can be used during backup. This mode should only be used with very large databases. A hot backup set is less compact and takes longer to restore and use than a normal backup set produced with the BLOCKING option. You can perform a CHECKPOINT just before a hot backup in order to reduce the size of the backup set.

If AS FILES is specified, the database files are copied to a directory specified by <file path> without any compression. The file path must be a directory. If the directory does not exist, it is created. The file path may be absolute or relative. If it is relative, it is interpreted as relative to the location of database files. When AS FILES is specified, SCRIPT or COMPRESSED options are not available. The backup can be performed as BLOCKING or NOT BLOCKING.

The HyperSQL jar also contains a program that creates an archive of an offline database. It also contains a program to expand an archive into database files. These programs are documented in this chapter under Backing up Database Catalogs.

Only a user with the DBA role can execute this statement.

CHECKPOINT

checkpoint statement

```
<checkpoint statement> ::= CHECKPOINT [DEFRAG]
```

Closes the database files, rewrites the script file, deletes the log file and reopens the database.

If DEFRAG is specified, also shrinks the *.data file to its minimum size. CHECKPOINT DEFRAG time depends on the size of the database and can take a long time with huge databases.

A checkpoint on a multi-user database waits until all other sessions have committed or rolled back. While the checkpoint is in progress other sessions are kept waiting. Checkpoint does not close any sessions.

Only a user with the DBA role can execute this statement.

SCRIPT

script statement

```
<script statement> ::= SCRIPT [<file name>]
```

Returns a script containing SQL statements that define the database, its users, and its schema objects. If `<file name>` is not specified, the statements are returned in a `ResultSet`, with each row containing an SQL statement. No data statements are included in this form. The optional file name is a single-quoted string. If `<file name>` is specified, then the script is written to the named file. In this case, all the data in all tables of the database is included in the script as `INSERT` statements.

Only a user with the `DBA` role can execute this statement.

Database Settings

These statements change the database settings.

SET DATABASE COLLATION

set database collation statement

```
<set database collation statement> ::= SET DATABASE COLLATION <collation name>  
[ NO PAD | PAD SPACE ]
```

Each database can have its own default collation. Sets the collation from the set of collations supported by HyperSQL. Once this command has been issued, the database can be opened in any JVM and will retain its collation.

All collations pad the shorter string with spaces when two strings are compared. If `NO PAD` is specified, comparison is performed without padding. The default system collation is named `SQL_TEXT`. To use the default without padding use `SET DATABASE COLLATION SQL_TEXT NO PAD`.

After you change the collation for a database that contains collated data, you must execute `SHUTDOWN COMPACT` or `SHUTDOWN SCRIPT` in order to recreate the indexes.

Only a user with the `DBA` role can execute this statement.

Collations are discussed in the `Schemas and Database Objects` chapter. Some examples of setting the database collation follow:

```
-- this collation is an ascii collation with Upper Case Comparison (coverts strings to uppercase  
for comparison)  
SET DATABASE COLLATION SQL_TEXT_UCC  
  
-- this collation is case-insensitive English  
SET DATABASE COLLATION "English 1"  
-- this collation is case-sensitive French  
SET DATABASE COLLATION "French 2"
```

SET DATABASE DEFAULT RESULT MEMORY ROWS

set database default result memory rows statement

```
<set database default result memory rows> ::= SET DATABASE DEFAULT RESULT MEMORY  
ROWS <unsigned integer literal>
```

Sets the maximum number of rows of each result set and internal temporary table that is held in memory. Temporary tables includes views, schema-based and session-based `TEMPORARY` tables, transient tables for subqueries, and `INFORMATION_SCHEMA` tables.

This setting applies to all sessions. Individual sessions can change the value with the `SET SESSION RESULT MEMORY ROWS` statement. The default is 0, meaning all result sets are held in memory.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.result_max_memory_rows`.

SET DATABASE DEFAULT TABLE TYPE

set database default table type statement

```
<set database default table type> ::= SET DATABASE DEFAULT TABLE TYPE { CACHED
| MEMORY }
```

Sets the type of table created when the next `CREATE TABLE` statement is executed. The default is `MEMORY`.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.default_table_type`.

SET DATABASE EVENT LOG LEVEL

set database event log level statement

```
<set database event log level> ::= SET DATABASE EVENT LOG [ SQL ] LEVEL { 0
| 1 | 2 | 3 }
```

When the `SQL` option is not used, this statement sets the amount of information logged in the internal, database-specific event log. Level 0 means no log. Level 1 means only important (error) events. Level 2 means more events, including both important and less important (normal) events. Level 3 includes even more details. For *readonly* and *mem*: databases, if the level is set above 0, the log messages are directed to `stderr`.

The events are logged in a file with the extension `.app.log` alongside the main database files.

This is equivalent to the connection property `hsqldb.applog`.

When the `SQL` option is used, this statement logs the `SQL` statements as they are executed. Each log line contains the timestamp and the session number, followed by the `SQL` statement and JDBC arguments if any.

Levels 1, 2 and 3 are supported. Level 1 only logs commits and rollbacks, while Level 2 and 3 log all statements. Level 2 truncates long statements, while level 3 reports the full statement and parameter values.

The logged lines are stored in a file with the extension `.sql.log` alongside the main database files.

This is equivalent to the connection property `hsqldb.sqllog`.

Only a user with the DBA role can execute this statement.

In version 2.3, the equivalent URL properties, `hsqldb.app_log` and `hsqldb.sql_log`, can be used not only for a new database, but also when opening an existing file database to change the event log level.

An extract from an `.sql.log` file created with log Level 3 is shown below. The numbers after the timestamp (10 and 1) show the session number. The values for prepared statement parameters are shown in parentheses at the end of the statement.

Example 11.6. SQL Log Example

```
2012-11-29 10:40:40.250 10 INSERT INTO TEST_CLOB VALUES (1,'Ut wisi enim ad minim veniam, quis
nostrud exerci')
```

```
2012-11-29 10:40:40.250 1 INSERT INTO SYSTEM_LOBS.LOB_IDS VALUES(?, ?, ?, ?) (1,49,0,40)
2012-11-29 10:40:40.250 1 COMMIT
2012-11-29 10:40:40.265 1 CALL SYSTEM_LOBS.ALLOC_BLOCKS(?, ?, ?) (1,0,1)
2012-11-29 10:40:40.265 1 COMMIT
```

SET DATABASE GC

set database gc statement

```
<set database gc statement> ::= SET DATABASE GC <unsigned integer literal>
```

An optional property which forces calls to `System.gc()` after the specified number of row operations. The default value for this property is 0, which means no `System.gc()` calls. Usual values for this property range from 10000 depending on the system and the memory allocation. This property may be useful in some in-process deployments, especially with older JVM implementations.

Only a user with the DBA role can execute this statement.

SET DATABASE TEXT TABLE DEFAULTS

set database text table defaults statement

```
<set database text table defaults statement> ::= SET DATABASE TEXT TABLE DEFAULTS
<character literal>
```

An optional property to override default text table settings. The string literal has the same format as the string used for setting the data source of a text table, but without the file name. See the [Text Tables](#) chapter.

Only a user with the DBA role can execute this statement.

SET DATABASE TRANSACTION CONTROL

set database transaction control statement

```
<set database transaction control statement> ::= SET DATABASE TRANSACTION CONTROL
{ LOCKS | MVLOCKS | MVCC }
```

Set the concurrency control system for the database. It can be issued only when all sessions have been committed or rolled back. This command and its modes is discussed in the [Sessions and Transactions](#) chapter.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.tx`.

SET DATABASE TRANSACTION ROLLBACK ON CONFLICT

set database transaction rollback on conflict statement

```
<set database transaction rollback on conflict statement> ::= SET DATABASE
TRANSACTION ROLLBACK ON CONFLICT { TRUE | FALSE }
```

When a transaction deadlock or conflict is about to happen, the current transaction is rolled back and an exception is raised. When this property is set false, the transaction is not rolled back. Only the latest statement that would cause the conflict is undone and an exception is raised. The property should not be changed unless the application can quickly perform an alternative statement and complete the transaction. It is provided for compatibility with other database engines which do not roll back the transaction upon deadlock. This command is also discussed in the [Sessions and Transactions](#) chapter.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.tx_conflict_rollback`.

SET DATABASE DEFAULT ISOLATION LEVEL

set database default isolation level statement

```
<set database default isolation level> ::= SET DATABASE DEFAULT ISOLATION LEVEL  
{ READ COMMITTED | SERIALIZABLE }
```

Sets the transaction isolation level for new sessions. The default is READ COMMITTED. Each session can also set its isolation level.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.tx_level`.

SET DATABASE UNIQUE NAME

set database unique name

```
<set database unique name statement> ::= SET DATABASE UNIQUE NAME <identifier>
```

Each HyperSQL catalog (database) has an engine-generated internal name. This name is a 16 character long string, beginning with HSQLDB and based on the time of creation of the database. The name is used for the log events that are sent to external logging frameworks. The new name must be exactly 16 characters long with no spaces.

Only a user with the DBA role can execute this statement.

SQL Conformance Settings

These statements modify the level of conformance to the SQL Standard in different areas. The settings that specify SQL SYNTAX are for compatibility with other database engines and are FALSE by default. For all the rest of the settings, TRUE means better conformance to the Standard (unless the Standard defines the behaviour as implementation dependent). The default value of a few of these settings is FALSE, due to widespread non-conforming statements that are already in use in user applications or statements generated by object relational tools. So long as it is practical, it is best to set the non-conforming defaults to TRUE in order to improve the quality of the database application.

SET DATABASE SQL SIZE

set database sql size statement

```
<set database sql size statement> ::= SET DATABASE SQL SIZE { TRUE | FALSE }
```

Enable or disable enforcement of column sizes for CHAR and VARCHAR columns. The default is TRUE, meaning table definition must contain `VARCHAR(n)` instead of `VARCHAR`.

SQL Standard requires enforcement.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_size`.

SET DATABASE SQL NAMES

set database sql names statement

```
<set database sql names statement> ::= SET DATABASE SQL NAMES { TRUE | FALSE }
```

Enable or disable full enforcement of the rule that prevents SQL keywords being used for database object names such as columns and tables. The default is `FALSE`, meaning disabled.

SQL Standard requires enforcement. *It is better to enable this check, in order to improve the quality and correctness of SQL statements.*

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_names`.

SET DATABASE SQL REGULAR NAMES

set database sql regular names statement

```
<set database sql regular names statement> ::= SET DATABASE SQL REGULAR NAMES  
{ TRUE | FALSE }
```

Enable or disable use of the underscore character at the beginning, or the dollar character anywhere in database object names such as columns and tables. The default is `TRUE`, meaning disabled.

SQL Standard does not allow the underscore character at the start of names, and does not allow the dollar character anywhere in a name. This setting can be changed for compatibility with existing database or for porting databases which include names that do not conform to the Standard.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.regular_names`.

SET DATABASE SQL REFERENCES

set database sql references statement

```
<set database sql references statement> ::= SET DATABASE SQL REFERENCES { TRUE  
| FALSE }
```

This command can enable or disable full enforcement of the rule that prevents ambiguous column references in SQL statements (usually `SELECT` statements). A column reference is ambiguous when it is not qualified by a table name or table alias and can refer to more than one column in a `JOIN` list.

The property is `FALSE` by default.

SQL Standard requires enforcement. *It is better to enable this check, in order to improve the quality and correctness of SQL statements.* When false, the first matching table is used to resolve the column reference.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_refs`.

SET DATABASE SQL TYPES

set database sql types statement

```
<set database sql types statement> ::= SET DATABASE SQL TYPES { TRUE | FALSE }
```

This command can enable or disable full enforcement of the rules that prevents illegal type conversions and parameters or nulls without type in SQL statements (usually `SELECT` statements). For example an `INTEGER` column or a `DATE` column cannot be compared to a character string or searched with a `LIKE` expression when the property is `TRUE`.

The property is `FALSE` by default.

SQL Standard requires enforcement. *It is better to enable this check, in order to improve the quality and correctness of SQL statements.*

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_type`.

SET DATABASE SQL TDC DELETE

set database sql tdc delete statement

```
<set database sql tdc delete statement> ::= SET DATABASE SQL TDC DELETE { TRUE  
| FALSE }
```

This command can enable or disable full enforcement of the SQL Standard rules that prevents triggered data change exceptions caused by `ON DELETE CASCADE` clauses of foreign key constraint.

When there are multiple constraints, a row may be updated by one constraint and deleted by another constraint in the same operation. This is not allowed by default. Changing this to false allows such violations of the Standard to pass without an exception.

The property is `TRUE` by default.

SQL Standard requires enforcement, therefore this property shouldn't be changed unless an application written for a non-conforming RDBMS needs it.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_tdc_delete`.

SET DATABASE SQL TDC UPDATE

set database sql tdc update statement

```
<set database sql tdc update statement> ::= SET DATABASE SQL TDC UPDATE { TRUE  
| FALSE }
```

This command can enable or disable full enforcement of the SQL Standard rules that prevents triggered data change exceptions caused by multiple `ON UPDATE` or `ON DELETE SET` clauses of foreign key constraint. When there are multiple constraints, a field in a row may be updated by two constraints to different values in the same operation. This is not allowed by default. Changing this to `FALSE` allows such violations of the Standard to pass without an exception.

The property is `TRUE` by default.

SQL Standard requires enforcement, therefore this property shouldn't be changed unless an application written for a non-conforming RDBMS needs it.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.enforce_tdc_update`.

SET DATABASE SQL TRANSLATE TTI TYPES

set database sql translate tti types statement

```
<set database sql translate tti types statement> ::= SET DATABASE SQL TRANSLATE  
TTI TYPES { TRUE | FALSE }
```

The JDBC Specification up to version 4.1 does not support some SQL Standard built-in types, therefore these types must be translated to a supported type when accessed through JDBC ResultSet and PreparedStatement methods.

If the property is true, the TIME / TIMESTAMP WITH TIME ZONE types and INTERVAL types are represented in JDBC methods of ResultSetMetaData and DatabaseMetaData as JDBC datetime types without time zone and the VARCHAR type respectively. The original type names are preserved.

The property is TRUE by default. If set to FALSE, the type codes for WITH TIME ZONE types will be SQL type codes as opposed to JDBC type codes.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `jdbc.translate_tti_types`.

SET DATABASE SQL CHARACTER LITERAL

set database sql character literal

```
<set database sql character literal statement> ::= SET DATABASE SQL CHARACTER  
LITERAL { TRUE | FALSE }
```

When the property is TRUE, the data type of character literal strings is CHARACTER. When the property is FALSE the data type is VARCHAR.

Setting this property FALSE results in strings not padded with spaces in CASE WHEN expressions that have multiple literal alternatives.

SQL Standard requires the CHARACTER type.

The property is TRUE by default.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.char_literal`.

SET DATABASE SQL CONCAT NULLS

set database sql concat nulls statement

```
<set database sql concat nulls statement> ::= SET DATABASE SQL CONCAT NULLS  
{ TRUE | FALSE }
```

When the property is TRUE, concatenation of a null value with a not-null value results in a null value. When the property is FALSE this type of concatenation result in the not-null value.

Setting this property FALSE results in concatenation behaviour similar to Oracle or MS SQL Server.

SQL Standard requires a NULL result.

The property is TRUE by default.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.concat_nulls`.

SET DATABASE SQL UNIQUE NULLS

set database sql unique nulls statement

```
<set database sql unique nulls statement> ::= SET DATABASE SQL UNIQUE NULLS  
{ TRUE | FALSE }
```

When the property is `TRUE`, with multi-column `UNIQUE` constraints, it is possible to insert multiple rows for which one or more of the values for the constraint columns is `NULL`. When the property is `FALSE`, if there is any not-null value in the columns, then the set of values is compared to the existing rows and if there is a match, an exception is thrown. The setting `FALSE`, makes the behaviour more restrictive. For example, inserting (1, null) twice is possible by default, but not possible when the property is `FALSE`.

Setting this property `FALSE` results in `UNIQUE` constraint behaviour similar to Oracle.

SQL Standard requires the default (`TRUE`) behaviour.

The property is `TRUE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.unique_nulls`.

SET DATABASE SQL CONVERT TRUNCATE

```
set database sql convert truncate
```

```
<set database sql convert truncate statement> ::= SET DATABASE SQL CONVERT  
TRUNCATE { TRUE | FALSE }
```

When the property is `TRUE`, conversion from a floating point value (a `DOUBLE` value) to an integral type always truncates the fractional part. When the property is `FALSE`, rounding takes place instead of truncation. For example, assigning the value `123456E-2` to an integer column will result in `1234` by default, but `1235` when the property is `FALSE`.

Standard SQL considers this behaviour implementation dependent.

The property is `TRUE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.convert_trunc`.

SET DATABASE SQL AVG SCALE

```
set database sql avg scale
```

```
<set database sql avg scale> ::= SET DATABASE SQL AVG SCALE <numeric value>
```

By default, the result of division and the `AVG` and `MEDIAN` aggregate functions has the same type as the aggregated type of the values. This includes the scale. The scale specified with this property is used if it is larger than the scale of the operation. For example, the average of 5 and 10 is 7 by default, but 7.50 if the scale is specified as 2. The result of `7/3` is 2 by default but 2.33 if the scale is specified as 2.

Standard SQL considers this behaviour implementation dependent. Some databases use a default scale larger than zero.

The property is 0 by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.avg_scale`.

SET DATABASE SQL DOUBLE NAN

set database sql double nan

```
<set database sql double nan> ::= SET DATABASE SQL DOUBLE NAN { TRUE | FALSE }
```

When the property is `TRUE`, division of a floating point value (a `DOUBLE` value) by zero raises an exception. When the property is `FALSE`, a Java `Double.NaN`, `POSITIVE_INFINITY` or `NEGATIVE_INFINITY` value is returned.

Standard SQL requires an exception to be raised.

The property is `TRUE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.double_nan`.

SET DATABASE SQL NULLS FIRST

set database sql nulls first

```
<set database sql nulls first> ::= SET DATABASE SQL NULLS FIRST { TRUE | FALSE }
```

When the property is `TRUE`, nulls appear before values in result sets with `ORDER BY`. When set `FALSE`, nulls appear after the values. Some databases, including PostgreSQL, Oracle and MS SQL Server, return nulls after the values.

The property is `TRUE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.nulls_first`.

SET DATABASE SQL NULLS ORDER

set database sql nulls order

```
<set database sql nulls order> ::= SET DATABASE SQL NULLS ORDER { TRUE | FALSE }
```

When `NULLS FIRST` or `NULLS LAST` is used explicitly in the `ORDER BY` clause, this property is ignored.

When the property is `TRUE`, nulls appear according to the value of `NULL FIRST` property as described above.

When set `FALSE`, nulls appear according to the value of `NULLS FIRST` property when `DESC` is not used in the `ORDER BY` clause. But if `DESC` is used, the position of nulls is reversed. Some databases, including MySQL and Oracle, return nulls in this manner when `DESC` is used in `ORDER BY`.

The property is `TRUE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.nulls_order`.

SET DATABASE SQL IGNORECASE

set database sql ignorecase

```
<set database sql ignorecase> ::= SET DATABASE SQL IGNORECASE { TRUE | FALSE }
```

This property is `FALSE` by default and should only be used in special circumstances where compatibility with a different database is required.

When the property is `TRUE`, all declarations of `VARCHAR` columns in tables or other database objects are converted to `VARCHAR_IGNORECASE`. This has a global effect on the database, unlike the `SET IGNORECASE` statement which applies only to the current session.

The property is `FALSE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.ignore_case`.

SET DATABASE SQL LIVE OBJECT

set database sql live object

```
<set database sql live object> ::= SET DATABASE SQL LIVE OBJECT { TRUE | FALSE }
```

This property is `FALSE` by default and can only be used in `mem:` databases.

When the property is `FALSE`, all java objects stored in a column of type `OTHER` are serialized. When the property is `FALSE`, objects are not serialized at all.

This is equivalent to the connection property `sql.live_object`.

SET DATABASE SQL SYNTAX DB2

set database sql syntax DB2

```
<set database sql syntax DB2 statement> ::= SET DATABASE SQL SYNTAX DB2 { TRUE  
| FALSE }
```

This property, when set `TRUE`, enables support for some elements of `DB2` syntax. Single-row `SELECT` statements (`SELECT <expression list>` without the `FROM` clause) are supported and treated as the `SQL Standard` equivalent, `VALUES <expression list>`. The `DUAL` table is supported, as well as the `ROWNUM` pseudo-column. `BINARY` type definitions such as `VARCHAR(L) FOR BIT DATA` are supported. Empty `DEFAULT` clauses in column definitions are supported.

The property is `FALSE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.syntax_db2`.

SET DATABASE SQL SYNTAX MSS

set database sql syntax MSS

```
<set database sql syntax MSS statement> ::= SET DATABASE SQL SYNTAX MSS { TRUE  
| FALSE }
```

This property, when set `TRUE`, enables support for some elements of `SQLServer` syntax. Single-row `SELECT` statements (`SELECT <expression list>` without the `FROM` clause) are supported and treated as the `SQL Standard` equivalent, `VALUES <expression list>`. The parameters of `CONVERT()` function are switched in this mode.

The property is `FALSE` by default.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.syntax_mss`.

SET DATABASE SQL SYNTAX MYS

set database sql syntax MYS

```
<set database sql syntax MYS statement> ::= SET DATABASE SQL SYNTAX MYS { TRUE
| FALSE }
```

This property, when set TRUE, enables support for some elements of MySQL syntax. The TEXT data type is translated to LONGVARCHAR.

In CREATE TABLE statements, [NOT NULL | NULL] can be used immediately after the column type name and before the DEFAULT clause. AUTO_INCREMENT is translated to the GENERATED BY DEFAULT AS IDENTITY clause.

Single-row SELECT statements (SELECT <expression list> without the FROM clause) are supported and treated as the SQL Standard equivalent, VALUES <expression list>.

The property is FALSE by default.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.syntax_mys`.

SET DATABASE SQL SYNTAX ORA

set database sql syntax ORA

```
<set database sql syntax ORA statement> ::= SET DATABASE SQL SYNTAX ORA { TRUE
| FALSE }
```

This property, when set TRUE, enables support for some elements of Oracle syntax. The DUAL table is supported, together with ROWNUM, NEXTVAL and CURRVAL syntax and semantics.

The non-standard types are translated to supported standard types. BINARY_DOUBLE and BINARY_FLOAT are translated to DOUBLE. LONG RAW and RAW are translated to VARBINARY with long or medium length limits. LONG and VARCHAR2 are translated to VARCHAR with long or medium length limits. NUMBER is translated to DECIMAL. Some extra type conversions and no-arg functions are also allowed in this mode.

The property is FALSE by default.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `sql.syntax_ora`.

SET DATABASE SQL SYNTAX PGS

set database sql syntax PGS

```
<set database sql syntax PGS statement> ::= SET DATABASE SQL SYNTAX PGS { TRUE
| FALSE }
```

This property, when set TRUE, enables support for some elements of PostgreSQL syntax. The TEXT data type is translated to LONGVARCHAR, while the SERIAL data types is translated to BIGINT together with GENERATED BY DEFAULT AS IDENTITY.

Single-row `SELECT` statements (`SELECT <expression list>` without the `FROM` clause) are supported and treated as the SQL Standard equivalent, `VALUES <expression list>`.

The functions `NEXTVAL(<sequence name string>)`, `CURRVAL(<sequence name string>)` and `LASTVAL()` are supported in this compatibility mode.

The property is `FALSE` by default.

Only a user with the `DBA` role can execute this statement.

This is equivalent to the connection property `sql.syntax_pgs`.

SET DATABASE REFERENTIAL INTEGRITY

set database referential integrity statement

```
<set database referential integrity statement> ::= SET DATABASE REFERENTIAL  
INTEGRITY { TRUE | FALSE }
```

This command enables or disables the enforcement of referential integrity constraints (foreign key constraints), check constraints apart from `NOT NULL` and execution of triggers. By default, all constraints are checked.

The only legitimate use of this statement is before importing large amounts of external data into tables that have existing `FOREIGN KEY` constraints. After import, the statement must be used again to enable constraint enforcement.

If you are not sure the data conforms to the constraints, run queries to verify all rows conform to the `FOREIGN KEY` constraints and take appropriate actions for the rows that do not conform.

A query example to return the rows in a foreign key table that have no parent is given below:

Example 11.7. Finding foreign key rows with no parents after a bulk import

```
SELECT * FROM foreign_key_table LEFT OUTER JOIN primary_key_table  
ON foreign_key_table.fk_col = primary_key_table.pk_col WHERE primary_key_table.pk_col IS NULL
```

Only a user with the `DBA` role can execute this statement.

Cache, Persistence and Files Settings

These statements control the memory and other settings for database persistence.

SET FILES BACKUP INCREMENT

set files backup increment statement

```
<set files backup increment statement> ::= SET FILES BACKUP INCREMENT { TRUE  
| FALSE }
```

Older versions of `HSQLDB` perform a backup of the `.data` file before its contents are modified and the whole `.data` file is saved in a compressed form when a `CHECKPOINT` or `SHUTDOWN` is performed. This takes a long time when the size of the database exceeds 100 MB or so (on an average 2010 computer, you can expect a backup speed of 20MB per second or more).

The alternative is backup in increments, just before some part of the `.data` file is modified. In this mode, no backup is performed at `CHECKPOINT` or `SHUTDOWN`. This mode is preferred for large databases which are opened and closed frequently.

The default mode is `TRUE`. If the old method of backup is preferred, the mode can be set `FALSE`.

Warning: The old, non-incremental setting, `FALSE`, shouldn't be used at all when the data file is larger than 4GB. If it is used, the data file is not fully backed up and can result in corruption. The zip compression method is used in this mode and it is limited to 4GB size.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.inc_backup`.

SET FILES CACHE ROWS

set files cache rows statement

```
<set files cache rows statement> ::= SET FILES CACHE ROWS <unsigned integer literal>
```

Sets the maximum number of rows (of `CACHED` tables) held in the memory cache. The default is 50000 rows.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.cache_rows`.

SET FILES CACHE SIZE

set files cache size statement

```
<set files cache size statement> ::= SET FILES CACHE SIZE <unsigned integer literal>
```

Sets maximum amount of data (of `CACHED` tables) in kilobytes held in the memory cache. The default is 10000 kilobytes. Note the amount of memory used is larger than this amount, which does not account for Java object size overheads.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.cache_size`.

SET FILES DEFRAG

set files defrag statement

```
<set files defrag statement> ::= SET FILES DEFRAG <unsigned integer literal>
```

Sets the threshold for performing a `DEFRAG` during a checkpoint. The `<unsigned integer literal>` is the percentage of abandoned space in the `*.data` file. When a `CHECKPOINT` is performed either as a result of the `.log` file reaching the limit set by `SET FILES LOG SIZE m`, or by the user issuing a `CHECKPOINT` command, the amount of space abandoned since the database was opened is checked and if it is larger than the specified percentage, a `CHECKPOINT DEFRAG` is performed instead of a `CHECKPOINT`. As the `DEFRAG` operation uses a lot of memory and takes a long time with large databases, setting the threshold well above zero is suitable for databases that are around than 500 MB or more.

The default is 0, which indicates no `DEFRAG`. Useful values are between 30 to 60.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.defrag_limit`.

SET FILES LOG

set files log statement

```
<set files log statement> ::= SET FILES LOG { TRUE | FALSE }
```

Sets logging of database operations on or off. Turning logging off is for special usage, such as temporary cache usage. The default is TRUE.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.log_data`.

SET FILES LOG SIZE*set files log size statement*

```
<set files log size statement> ::= SET FILES LOG SIZE <unsigned integer literal>
```

Sets the maximum size in MB of the `*.log` file to the specified value. The default maximum size is 50 MB. If the value is zero, no limit is used for the size of the file. When the size of the file reaches this value, a CHECKPOINT is performed and the `*.log` file is cleared to size 0.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.log_size`.

SET FILES NIO*set files nio*

```
<set files nio statement> ::= SET FILES NIO { TRUE | FALSE }
```

Sets the access method of the `.data` file. The default is TRUE and uses the Java nio classes to access the file via memory-mapped buffers.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.nio_data_file`.

SET FILES NIO SIZE*set files nio size*

```
<set files nio size statement> ::= SET FILES NIO SIZE <unsigned integer literal>
```

Sets The maximum size of `.data` file in megabytes that can use the nio access method. When the file gets larger than this limit, non-nio access methods are used. Values 64, 128, 256, 512, 1024 and larger multiples of 512 can be used. The default is 256MB.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.nio_max_size`.

SET FILES WRITE DELAY*set files write delay statement*

```
<set files write delay statement> ::= SET FILES WRITE DELAY {{ TRUE | FALSE }  
| <seconds value> | <milliseconds value> MILLIS}
```

Set the WRITE DELAY property of the database. The WRITE DELAY controls the frequency of file sync for the log file. When WRITE_DELAY is set to FALSE or 0, the sync takes place immediately at each COMMIT. WRITE DELAY TRUE performs the sync once every 0.5 seconds (which is the default). A numeric value can be specified instead.

The purpose of this command is to control the amount of data loss in case of a total system crash. A delay of 1 second means at most the data written to disk during the last second before the crash is lost. All data written prior to this has been synced and should be recoverable.

A write delay of 0 impacts performance in high load situations, as the engine has to wait for the file system to catch up.

To avoid this, you can set write delay down to 10 milliseconds.

Each time the SET FILES WRITE DELAY statement is executed with any value, a sync is immediately performed.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection properties `hsqldb.write_delay` and `hsqldb.write_delay_millis`.

SET FILES SCALE

set files scale

```
<set files scale statement> ::= SET FILES SCALE <scale value>
```

Changes the scale factor for the .data file. The default scale is 32 and allows 64GB of data storage capacity. The scale can be increased in order to increase the maximum data storage capacity. The scale values 8, 16, 32, 64, 128, 256, 512, 1024 are allowed. Scale value 1024 allows a maximum capacity of 2 TB.

This command can be used only when there is no data in CACHED tables. This is equivalent to the connection property `hsqldb.cache_file_scale`.

The scale factor indicates the size of the unit of storage of data in bytes. For example, with a scale factor of 128, a row containing a small amount of data will use 128 bytes. Larger rows may use multiple units of 128 bytes.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.cache_file_scale`.

SET FILES LOB SCALE

set files lob scale

```
<set files lob scale statement> ::= SET FILES LOB SCALE <scale value>
```

Changes the scale factor for the .lobs file. The scale is interpreted in kilobytes. The default scale is 32 and allows 64TB of lob data storage capacity. The scale can be reduced in order to improve storage efficiency. If the lobes are a lot smaller than 32 kilobytes, reducing the scale will reduce wasted space. The scale values 1, 2, 4, 8, 16, 32 are allowed. For example if the average size of lobes is 4 kilobytes, the default scale of 32 will result in 28KB wasted space for each lob. Reducing the lob scale to 2 will result in average 1KB wasted space for each lob.

This command can be used only when there is no lob in the database.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.lob_file_scale`.

SET FILES LOB COMPRESSED

set files lob compressed

```
<set files lob compressed statement> ::= SET FILES LOB COMPRESSED { TRUE | FALSE }
```

By default, lobes are not compressed for storage. When this setting is TRUE, all BLOB and CLOB values stored in the database are compressed. Compression reduces the storage size but increases the access time.

This command can be used only when there is no lob in the database.

Only a user with the DBA role can execute this statement.

This is equivalent to the connection property `hsqldb.lob_compressed`.

SET FILES SCRIPT FORMAT

set files script format

```
<set files script format statement> ::= SET FILES SCRIPT FORMAT { TEXT | COMPRESSED }
```

Changes the compression setting for database scripts. The default is text. Using COMPRESSED results in the storage of the .script file in gzip compressed form. Using this command causes a CHECKPOINT.

Only a user with the DBA role can execute this statement.

SET TABLE TYPE

set table type

```
<set table type statement> ::= SET TABLE <table name> TYPE { MEMORY | CACHED }
```

Changes the storage type of an existing table between CACHED and MEMORY types.

Only a user with the DBA role can execute this statement.

Authentication Settings

Two settings are available for authentication control.

When the default password authentication is used, the passwords can be checked for complexity according to administrative rules

SET DATABASE PASSWORD CHECK FUNCTION

set database password check function

```
<set database password check function statement> ::= SET DATABASE PASSWORD CHECK FUNCTION { <routine body> | NONE }
```

The routine body is the body of a function that has a VARCHAR parameter and returns a BOOLEAN. This function checks the PASSWORD submitted as parameter and returns TRUE if it conforms to complexity checks, or FALSE, if it does not.

The <routine body> can be an SQL block or an external Java function reference. This is covered in the SQL-Invoked Routines chapter

To disable this mechanism, the token NONE can be specified instead of the <routine body>.

Only a user with the DBA role can execute this statement.

In the examples below, an SQL function and a Java function are used.

```

SET DATABASE PASSWORD CHECK FUNCTION
BEGIN ATOMIC
  IF CHAR_LENGTH(PASSWORD) > 6 THEN
    RETURN TRUE;
  ELSE
    RETURN FALSE;
  END IF;
END

SET DATABASE PASSWORD CHECK FUNCTION EXTERNAL NAME
'CLASSPATH:org.anorg.access.AccessClass.accessMethod'

// the Java method is defined like this
public static boolean accessMethod(String param) {
  return param != null && param.length > 6;
}

```

It is possible to replace the default password authentication completely with a function that uses external authentication servers, such as LDAP. This function is called each time a user connects to the database.

SET DATABASE AUTHENTICATION FUNCTION

set database authentication function

```

<set database authentication function statement> ::= SET DATABASE AUTHENTICATION
FUNCTION { <external body reference> | NONE }

```

The routine body is an external Java function reference. This function has three String parameters. The first parameter is the unique name of the database, the second parameter the user name, and the third parameter the password.

External authentication can be used in two different patterns. In the first pattern, user names must be stored in the database. In the second pattern, user names shouldn't be stored in the database and any names that are stored in the database are ignored.

In both patterns, the username and password are checked by the authentication function. If the function throws a runtime exception then authentication fails.

In the first pattern, the function always returns null if authentication is successful.

In the second pattern, the function returns a list of role names that have been granted to the user. These roles must match the ROLE objects that have been defined in the database.

The Java function should return an instance of `org.hsqldb.jdbc.JDBCArrayBasic` constructed with a `String[]` argument that contains the role names.

Only a user with the DBA role can execute this statement.

```

SET DATABASE AUTHENTICATION FUNCTION EXTERNAL NAME
'CLASSPATH:org.anorg.access.AccessClass.accessExternalMethod'

// the Java method is defined like this
public static java.sql.Array accessExternalMethod(String database, String user, String password)
{
  if (externalCheck(database, user, password) {
    return null;
  }
  throw new RuntimeException("failed to authenticate");
}

```

Chapter 12. Compatibility With Other DBMS

Fred Toussi, The HSQL Development Group

\$Revision: 3096 \$

Copyright 2010-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Compatibility Overview

HyperSQL is used more than any other database engine for application testing and development targeted at other databases. Over the years, this usage resulted in developers finding and reporting many obscure bugs and opportunities for enhancements in HyperSQL. The bugs have all been fixed shortly after the report and enhancements were added in later versions.

HyperSQL 2.x has been written to the SQL Standard and avoids the traps caused by superficial imitation of the Standard by some other RDBMS. The SQL Standard has existed since 1989 and has been expanded over the years in several revisions. HyperSQL follows SQL:2011. Also, the X-Open specification has defined a number of SQL functions which are implemented by most RDBMS.

HyperSQL has many property settings that relax conformance to the Standard in order to allow compatibility with other RDBMS, without breaking the core integrity of the database. These properties are modified with `SET DATABASE SQL` statements described in the SQL Conformance Settings section of Management chapter.

HyperSQL is very flexible and provides some other properties which define a preference among various valid choices. For example the ability to set the transaction model of the database, or the ability to define the scale of the data type of the result of integer division or average calculation (`SET DATABASE SQL AVG SCALE`).

Each major RDBMS supports additional functions that are not covered by the standard. Some RDBMS use non-standard syntax for some operations. Fortunately, most popular RDBMS products have introduced better compatibility with the Standard in their recent versions, but there are still some portability issues. HyperSQL overcomes the portability issues using these strategies

- An extensive set of functions cover the SQL Standard, X-Open, and most of the useful functions that other RDBMS support.
- Database properties, which can be specified on the URL or as SQL statements, relax conformance to the Standard in order to allow non-standard comparisons and assignments allowed by other RDBMS.
- Specific SQL syntax compatibility modes allow syntax and type names that are supported by some popular RDBMS.
- User-defined types and functions, including aggregate functions, allow any type or function that is supported by some RDBMS to be defined and used.

Support for compatibility with other RDBMS has been extended with each version of HyperSQL.

PostgreSQL Compatibility

PostgreSQL is fairly compatible with the Standard, but uses some non-standard features.

- Use `SET DATABASE SQL SYNTAX PGS TRUE` or the equivalent URL property `sql.syntax_pgs=true` to enable the PostgreSQL's non-standard features. References to `SERIAL`, `BIGSERIAL`, `TEXT` and `UUID` data types, as well as sequence functions, are translated into HyperSQL equivalents.
- Use `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- PostgreSQL functions are generally supported.
- For identity columns, PostgreSQL uses a non-standard linkage with an external identity sequence. In most cases, this can be converted to `GENERATED BY DEFAULT AS IDENTITY`. In those cases where the identity sequence needs to be shared by multiple tables, you can use a new HyperSQL 2.x feature `GENERATED BY DEFAULT AS SEQUENCE <sequence name>`, which is the equivalent of the PostgreSQL implementation.
- In `CREATE TABLE` statements, the `SERIAL` and `BIGSERIAL` types are translated into `INTEGER` or `BIGINT`, with `GENERATED BY DEFAULT AS IDENTITY`. Usage of `DEFAULT NEXTVAL(<sequence name>)` is supported so long as the `<sequence name>` refers to an existing sequence. This usage is translated into `GENERATED BY DEFAULT AS SEQUENCE <sequence name>`.
- In `SELECT` and other statements, the `NEXTVAL(<sequence name>)` and `LASTVAL()` functions are supported and translated into HyperSQL's `NEXT VALUE FOR <sequence name>` and `IDENTITY()` expressions.
- PostgreSQL uses a non-standard expression, `SELECT 'A Test String'` to return a single row table. The standard form is `VALUES('A Test String')`. In PGS syntax mode, this type of `SELECT` is supported.
- HyperSQL supports SQL Standard `ARRAY` types. PostgreSQL also supports this, but not entirely according to the Standard.
- SQL routines are portable, but some syntax elements are different and require changes.
- You may need to use `SET DATABASE SQL TDC { DELETE | UPDATE } FALSE` statements, as PostgreSQL does not enforce the subtle rules of the Standard for foreign key cascading deletes and updates. PostgreSQL allows cascading operations to update a field value multiple times with different values, the Standard disallows this.

MySQL Compatibility

The latest versions of MySQL have introduced better Standard compatibility but some of these features have to be turned on via properties. You should therefore check the current Standard compatibility settings of your MySQL database and use the available HyperSQL properties to achieve closer results. If you avoid the few anti-Standard features of MySQL, you can port your databases to HyperSQL.

Using HyperSQL during development and testing of MySQL apps helps to avoid data integrity issues that MySQL may ignore.

HyperSQL does not have the following non-standard limitations of MySQL.

- With HyperSQL, an `UPDATE` statement can update `UNIQUE` and `PRIMARY KEY` columns of a table without causing an exception due to temporary violation of constraints. These constraints are checked at the end of execution, therefore there is no need for an `ORDER BY` clause in an `UPDATE` statement.
- MySQL foreign key constraints are not enforced by the default MyISAM engine. Be aware of the possibility of data being rejected by HyperSQL due to these constraints.
- With HyperSQL `INSERT` or `UPDATE` statements either succeed or fail due to constraint violation. MySQL has the non-standard `IGNORE` override to ignore violations and alter the data, which is not accepted by HyperSQL.
- Unlike MySQL, HyperSQL allows you to modify a table with an `INSERT`, `UPDATE` or `DELETE` statement which selects from the same table in a subquery.

Follow the guidelines below for converting MySQL databases and applications.

- Use `SET DATABASE SQL SYNTAX MYS TRUE` or the equivalent URL property `sql.syntax_mys=true` to enable support for `AUTO_INCREMENT` and `TEXT` data types and several other types. These type definitions are translated into HyperSQL equivalents.
- Use MVCC with `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- Avoid storing invalid values, for example invalid dates such as '0000-00-00' or '2001-00-00' which are rejected by HyperSQL.
- Avoid the MySQL feature that trims spaces at the end of `CHAR` values.
- In MySQL, a database is the same as a schema. In HyperSQL several schemas can exist in the same database and accessed transparently. In addition a HyperSQL server supports multiple separate databases.
- In MySQL, older, non-standard, forms of database object name case-sensitivity make is difficult to port applications. Use the latest form which encloses case-sensitive names in double quotes.
- MySQL functions are generally supported, including `GROUP_CONCAT`.
- For fine control over type conversion, check the settings for `SET DATABASE SQL CONVERT TRUNCATE FALSE`
- If you use concatenation of possibly `NULL` values in your select statements, you may need to change the setting with the `SET DATABASE SQL CONCAT NULLS FALSE`
- If your application relies on MySQL behaviour for ordering of nulls in `SELECT` statements with `ORDER BY`, use both `SET DATABASE SQL NULLS FIRST FALSE` and `SET DATABASE SQL NULLS ORDER FALSE` to change the defaults.
- MySQL supports most SQL Standard types (except `INTERVAL` types), as well as non-standard types, which are also supported by HyperSQL. Supported types include `SMALLINT`, `INT`, `BIGINT`, `DOUBLE`, `FLOAT`, `DECIMAL`, `NUMERIC`, `VARCHAR`, `CHAR`, `BINARY`, `VARBINARY`, `BLOB`, `DATE`, `TIMESTAMP` (all Standard SQL) and `TINYINT`, `DATETIME` (non Standard). `UNSIGNED` types are converted to signed.
- MySQL uses a non-standard expression, `SELECT 'A Test String'` to return a single row table. The standard form is `VALUES('A Test String')`. In `MYS` syntax mode, this type of `SELECT` is supported.
- Indexes defined inside `CREATE TABLE` statements are accepted and created. The index names must be unique within the schema.
- HyperSQL supports `ON UPDATE CURRENT_TIMESTAMP` for column definitions.
- HyperSQL translates `INSERT IGNORE`, `REPLACE` and `ON DUPLICATE KEY UPDATE` variations of `INSERT` into predictable and error-free operations.

When `INSERT IGNORE` is used, if any of the inserted rows would violate a `PRIMARY KEY` or `UNIQUE` constraint, that row is not inserted. The rest of the rows are then inserted only if there is no other violation such as long strings or type mismatch, otherwise the appropriate error is returned.

When `REPLACE` or `ON DUPLICATE KEY UPDATE` is used, the rows that need replacing or updating are updated with the given values. This works exactly like an `UPDATE` statement for those rows. Referential constraints and other integrity checks are enforced and update triggers are activated. The row count returned is simply the total number of rows inserted and updated.

- MySQL user-defined function and procedure syntax is very similar to SQL Standard syntax. A few changes may still be required.

Firebird Compatibility

Firebird generally follows the SQL Standard. Applications can be ported to HyperSQL without difficulty.

Apache Derby Compatibility

Apache Derby supports a smaller subset of the SQL Standard compared to HyperSQL. Applications can be ported to HyperSQL without difficulty.

- Use MVCC with `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- HyperSQL supports Java language functions and stored procedures with the standard syntax, which is similar to the way Derby supports these features.

Oracle Compatibility

Recent versions of Oracle support Standard SQL syntax for outer joins and many other operations. In addition, HyperSQL features a setting to support Oracle syntax and semantics for the most widely used non-standard features.

- Use `SET DATABASE SQL SYNTAX ORA TRUE` or the equivalent URL property `sql.syntax_ora=true` to enable support for some non-standard syntax of Oracle.
- Use MVCC with `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- Fine control over MVCC deadlock avoidance is provided by the `SET DATABASE TRANSACTION ROLLBACK ON CONFLICT FALSE` and the corresponding `hsqldb.tx_conflict_rollback` connection property.
- If your application relies on Oracle behaviour for nulls in multi-column UNIQUE constraints, use `SET DATABASE SQL UNIQUE NULLS FALSE` to change the default.
- If your application relies on Oracle behaviour for ordering of nulls in SELECT statements with ORDER BY, but without NULLS FIRST or NULLS LAST, use both `SET DATABASE SQL NULLS FIRST FALSE` and `SET DATABASE SQL NULLS ORDER FALSE` to change the defaults.
- If you use the non-standard concatenation of possibly NULL values in your select statements, you may need to change the setting for `SET DATABASE SQL CONCAT NULLS FALSE`.
- Many Oracle functions are supported, including no-arg functions such as SYSDATE and SYSTIMESTAMP and more complex ones such as TO_DATE and TO_CHAR.
- Non-standard data type definitions such as NUMBER, VARCHAR2, NVARCHAR2, BINARY_DOUBLE, BINARY_FLOAT, LONG, RAW are translated into the closest HyperSQL / SQL Standard equivalent in ORA mode.
- Non-standard DEFAULT definitions for columns, such as the use of DUAL with a SEQUENCE function are supported and translated in ORA syntax mode.
- The DATE type is interpreted as TIMESTAMP(0) in ORA syntax mode.
- The DUAL table and the expressions, ROWNUM, CURRVAL, NEXTVAL are supported in ORA syntax mode.
- HyperSQL natively supports operations involving datetime and interval values. These features are based on the SQL Standard.
- Many subtle automatic type conversions, syntax refinements and other common features are supported.

- SQL routines are generally portable, but some changes are required.

DB2 Compatibility

DB2 is highly compatible with the SQL Standard (except for its lack of support for the INFORMATION_SCHEMA). Applications can be ported to HyperSQL without difficulty.

- Use `SET DATABASE SQL SYNTAX DB2 TRUE` or the equivalent URL property `sql.syntax_db2=true` to enable support for some non-standard syntax of DB2.
- Use MVCC with `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- HyperSQL supports almost the entire syntax of DB2 together with many of the functions. Even local temporary tables using the SESSION pseudo schema are supported.
- The DB2 binary type definition FOR BIT DATA, as well as empty definition of column default values are supported in DB2 syntax mode.
- Many DB2 functions are supported.
- The DUAL table and the expressions, ROWNUM, CURRVAL, NEXTVAL are supported in DB2 syntax mode.
- SQL routines are highly portable with minimal change.

MS SQLServer and Sybase Compatibility

SQLServer has some incompatibilities with the Standard syntax. The most significant is the use of square brackets instead of double quotes for case-sensitive column names.

- Use `SET DATABASE SQL SYNTAX MSS TRUE` or the equivalent URL property `sql.syntax_mss=true` to enable support for the `CONVERT(<type definition>, <expression>)` function with switched order of arguments
- Use MVCC with `SET DATABASE TRANSACTION CONTROL MVCC` if your application is multi-user.
- If you use the non-standard concatenation of possibly NULL values in your select statements, you may need to change the setting for `SET DATABASE SQL CONCAT NULLS FALSE`.
- HyperSQL supports + for string concatenation.
- SQLServer uses a non-standard expression, `SELECT 'A Test String'` to return a single row table. The standard form is `VALUES('A Test String')`. In MSS syntax mode, this type of SELECT is supported.
- SQL routines need quite a lot of changes.

Chapter 13. Properties

Fred Toussi, The HSQL Development Group

\$Revision: 5633 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Connection URL

The normal method of accessing a HyperSQL catalog is via the JDBC Connection interface. An introduction to different methods of providing database services and accessing them can be found in the [SQL Language](#) chapter. Details and examples of how to connect via JDBC are provided in our JavaDoc for `JDBCConnection`.

A uniform method is used to distinguish between different types of connection. The common driver identifier is `jdbc:hsqldb:` followed by a protocol identifier (`mem:` `file:` `res:` `hsql:` `http:` `hsqls:` `https:`) then followed by host and port identifiers in the case of servers, then followed by database identifier. Additional property / value pairs can be appended to the end of the URL, separated with semicolons.

Table 13.1. Memory Database URL

Driver and Protocol	Host and Port Example	Database Example
<code>jdbc:hsqldb:mem:</code>	not available	<code>accounts</code>
Lowercase, single-word identifier creates the in-memory database when the first connection is made. Subsequent use of the same Connection URL connects to the existing DB.		
The old form for the URL, <code>jdbc:hsqldb:.</code> creates or connects to the same database as the new form for the URL, <code>jdbc:hsqldb:mem:.</code>		

Table 13.2. File Database URL

Driver and Protocol	Host and Port Example	Database Example
<code>jdbc:hsqldb:file:</code>	not available	<code>accounts</code> <code>/opt/db/accounts</code> <code>C:/data/mydb</code>
The file path specifies the database files. It should consist of a relative or absolute path to the directory containing the database files, followed by a '/' and the database name. In the above examples the first one refers to a set of <code>mydb.*</code> files in the directory where the <code>javac</code> command for running the application was issued. The second and third examples refer to absolute paths on the host machine: For example, files named <code>accounts.*</code> in the directory <code>/opt/db</code> for the <code>accounts</code> database.		

Table 13.3. Resource Database URL

Driver and Protocol	Host and Port Example	Database Example
<code>jdbc:hsqldb:res:</code>	not available	<code>/adirectory/dbname</code>

Driver and Protocol	Host and Port Example	Database Example
Database files can be loaded from one of the jars specified as part of the Java command the same way as resource files are accessed in Java programs. The /adirectory above stands for a directory in one of the jars.		

Table 13.4. Server Database URL

Driver and Protocol	Host and Port Example	Database Example
jdbc:hsqldb:hsq1:	//localhost	/an_alias
jdbc:hsqldb:hsq1s:	//192.0.0.10:9500	/enrolments
jdbc:hsqldb:http:	//dbserver.somedomain.com	/quickdb
jdbc:hsqldb:https:		
The host and port specify the IP address or host name of the server and an optional port number. The database to connect to is specified by an alias. This alias is a lowercase string defined in the <code>server.properties</code> file to refer to an actual database on the file system of the server or a transient, in-memory database on the server. The following example lines in <code>server.properties</code> or <code>webserver.properties</code> define the database aliases listed above and accessible to clients to refer to different file and in-memory databases.		
The old form for the server URL, e.g., <code>jdbc:hsqldb:hsq1//localhost</code> connects to the same database as the new form for the URL, <code>jdbc:hsqldb:hsq1//localhost/</code> where the alias is a zero length string.		

Variables In Connection URL

Two types of variables are allowed for file: database URLs. These properties have an effect only if used for the first connection to the database (the connection which opens the database). When running a server, these variables have no effect on the connection URL but can be appended to the database path URL in `server.properties` or the server command line.

If the database part of a file: database begins with `~/` or `~\` the tilde character is replaced with the value of the system property "user.home" resulting in the database being created or accessed in this directory, or one of its subdirectories. In the examples below, the database files for `mydb` and `filedb` are located in the user's home directory.

```
jdbc:hsqldb:file:~/mydb
jdbc:hsqldb:file:~/filedb;shutdown=true
```

If the database URL contains a string in the form of `${propname}` then the sequence of characters is replaced with the system property with the given name. For example you can use this in the URL of a database that is used in a web application and define the system property, "propname" in the web application properties. In the example below, the string `${mydbpath}` is replaced with the value of the property, `mydbpath`

```
jdbc:hsqldb:file:${mydbpath}
```

Properties for Individual Connections

Each JDBC Connection to a database can specify connection properties. The properties `user` and `password` are always required. The following optional properties can also be used.

Connection properties are specified either by establishing the connection via the method call below, or the property can be appended to the full Connection URL. The first three of these properties can be used for any connection, including connection to a Server but the other three have an effect only with the first connection to a file: or mem: database, or when appended to the database path URL in `server.properties` or the server command line.

```
DriverManager.getConnection (String url, Properties info);
```

Table 13.5. User and Password

Name	Default	Description
user	SA	user name
Standard property. This property is case sensitive. Example below:		
<code>jdbc:hsqldb:file:enrolments;user=aUserName;ifexists=true</code>		
password	empty string	password for the user
Standard property. This property is case sensitive. Example below:		
<code>jdbc:hsqldb:file:enrolments;user=aUserName;password=3xLVz</code>		
For compatibility with other engines, a non-standard form of specifying user and password is also supported. In this form, user name and password appear at the end of the URL string, prefixed respectively with the question mark and the ampersand:		
<code>jdbc:hsqldb:file:enrolments;create=false?user=aUserName&password=3xLVz</code>		

Table 13.6. Closing old ResultSet when Statement is reused

Name	Default	Description
close_result	false	closing the old result set when a new ResultSet is created by a Statement
This property is used for compatibility with the JDBC specification. When true (the JDBC specification), a ResultSet that was previously returned by executing a Statement or PreparedStatement is closed as soon as the Statement is executed again.		
The default is false as previous versions of HSQLDB did not close old result set. The user application should close old result sets when they are no longer needed and should not rely on auto-closing side effect of executing the Statement.		
The default is false. When the property is true, the old ResultSet is closed when a Statement is re-executed. Example below:		
<code>jdbc:hsqldb:hsq://localhost/enrolments;close_result=true</code>		
When a ResultSet is used inside a user-defined stored procedure, the default, false, is always used for this property.		

Table 13.7. Column Names in JDBC ResultSet

Name	Default	Description
get_column_name	true	column name in ResultSet
This property is used for compatibility with other JDBC driver implementations. When true (the default), <code>ResultSet.getColumnName(int c)</code> returns the underlying column name. This property can be specified differently for different connections to the same database.		
The default is true. When the property is false, the above method returns the same value as <code>ResultSet.getColumnLabel(int column)</code> Example below:		

Name	Default	Description
<code>jdbc:hsqldb:hsq://localhost/enrolments;get_column_name=false</code>		
When a <code>ResultSet</code> is used inside a user-defined stored procedure, the default, <code>true</code> , is always used for this property.		

Table 13.8. Empty batch in JDBC PreparedStatement

Name	Default	Description
<code>allow_empty_batch</code>	<code>false</code>	<code>executeBatch</code> with empty batch
This property is used for compatibility with other JDBC driver implementations such as the PostgreSQL driver. By default <code>PreparedStatement.executeBatch()</code> throws an exception if <code>addBatch()</code> has not been called at all. Setting this property to <code>true</code> ignores the empty batch and returns an empty <code>int[]</code> . This property can be specified differently for different connections to the same database.		
The default is <code>false</code> . Example below:		
<code>jdbc:hsqldb:hsq://localhost/enrolments;allow_empty_batch=true</code>		
When a <code>PreparedStatement</code> is used inside a user-defined stored procedure, the default, <code>false</code> , is always used for this property.		

Table 13.9. Creating New Database

Name	Default	Description
<code>ifexists</code>	<code>false</code>	connect only if database already exists
Has an effect only with <code>mem:</code> and <code>file:</code> database. When <code>true</code> , will not create a new database if one does not already exist for the URL.		
When the property is <code>false</code> (the default), a new <code>mem:</code> or <code>file:</code> database will be created if it does not exist.		
Setting the property to <code>true</code> is useful when troubleshooting as no database is created if the URL is malformed. Example below:		
<code>jdbc:hsqldb:file:enrolments;ifexists=true</code>		
<code>create</code>	<code>true</code>	create the database if it does not exist
Similar to the <code>ifexists</code> property, but with opposite meaning.		
Has an effect only with <code>mem:</code> and <code>file:</code> database. When <code>false</code> , will not create a new database if one does not already exist for the URL.		
When the property is <code>true</code> (the default), a new <code>mem:</code> or <code>file:</code> database will be created if it does not exist.		
Setting the property to <code>true</code> is useful when troubleshooting as no database is created if the URL is malformed. Example below:		
<code>jdbc:hsqldb:file:enrolments;create=false</code>		

Table 13.10. Automatic Shutdown

Name	Default	Description
<code>shutdown</code>	<code>false</code>	shut down the database when the last connection is closed

Name	Default	Description
		<p>If this property is <code>true</code>, when the last connection to a database is closed, the database is automatically shut down. The property takes effect only when the first connection is made to the database. This means the connection that opens the database. It has no effect if used with subsequent connections.</p> <p>This command has two uses. One is for test suites, where connections to the database are made from one JVM context, immediately followed by another context. The other use is for applications where it is not easy to configure the environment to shutdown the database. Examples reported by users include web application servers, where the closing of the last connection coincides with the web app being shut down.</p>
<pre>jdbc:hsqldb:file:enrolments;shutdown=true</pre>		

In addition, when the first connection to an *in-process* `file:` or `mem:` database creates a new database all the user-defined database properties can be specified as URL properties. See the next section for details.

Properties for the Database

Each database has several default settings (properties) that are listed in the [System Management](#) chapter. These properties can be changed via SQL commands after a connection is made to the database. It is possible to specify most of these properties in the connection properties or as part of the URL string when the first connection is made to a new `file:` or `mem:` database. This allows the properties to be set without using any SQL commands. The corresponding SQL command is given for each property. For a server, these properties can be appended to the database path URL in `server.properties` or the server command line.

Note the preferred method of setting database properties is by using a set of SQL statements. These statements can be used both for a new database or an existing database, unlike URL properties that are generally effective for new databases only.

If the properties are used for connection to an existing database, they are ignored.

The exceptions are the following property settings that are allowed for the first connection to an existing database (the connection which reopens the database): `readonly=true`, `files_readonly=true`, `hsqldb.lock_file=false`, `hsqldb.sqllog=1-3`, `hsqldb.applog=1-3`. These specific property / value pairs override the existing database properties. For example a normal database is opened as `readonly`, or the lock file is not created, or the sql log level is set to a value between 1 and 3.

Management of properties has changed since version 1.8. The old `SET PROPERTY` statement does not change a property and is ignored. The statement is retained to simplify application upgrades.

In the example URL below, two properties are set for the first connection to a new database.

```
jdbc:hsqldb:file:enrolments;hsqldb.cache_rows=10000;hsqldb.nio_data_file=false
```

In the table below, database properties that can be used as part of the URL or in connection properties are listed. For each property that can also be set with an SQL statement, the statement is also given. These statements are described more extensively in the [System Management](#) chapter.

Table 13.11. Validity Check Property

Name	Default	Description
<code>check_props</code>	<code>false</code>	checks the validity of the database properties
<p>If the property is <code>true</code>, every database property that is specified on the URL or in connection properties is checked and if it is not used correctly, an error is returned.</p>		
<pre>this property cannot be set with an SQL statement</pre>		

SQL Conformance Properties

Table 13.12. SQL Keyword Use as Identifier

Name	Default	Description
sql.enforce_names	false	enforcing SQL keywords
This property, when set true, prevents SQL keywords being used for database object names such as columns and tables.		
SET DATABASE SQL NAMES { TRUE FALSE }		

Table 13.13. SQL Keyword Starting with the Underscore or Containing Dollar Characters

Name	Default	Description
sql.regular_names	true	enforcing SQL keywords
This property, when set true, prevents database object names such as columns and tables beginning with the underscore or containing the dollar character.		
SET DATABASE SQL REGULAR NAMES { TRUE FALSE }		

Table 13.14. Reference to Columns Names

Name	Default	Description
sql.enforce_refs	false	enforcing column reference disambiguation
This property, when set true, causes an error when an SQL statement (usually a select statement) contains column references that can be resolved by more than one table name or alias. In effect forces such column references to have a table name or table alias qualifier.		
SET DATABASE SQL REFERENCES { TRUE FALSE }		

Table 13.15. String Size Declaration

Name	Default	Description
sql.enforce_size	true	size enforcement of string columns
Conforms to SQL standards for size and precision of data types. When true, all VARCHAR column type declarations require a size. When the property is false and there is no size in the declaration, a default size is used. Note that all other types accept a declaration without a size, which is interpreted as a default size.		
SET DATABASE SQL SIZE { TRUE FALSE }		

Table 13.16. Type Enforcement in Comparison and Assignment

Name	Default	Description
sql.enforce_types	false	enforcing type compatibility
This property, when set true, causes an error when an SQL statements contains comparisons or assignments that are non-standard due to type mismatch. Most illegal comparisons and assignments will cause an exception regardless of this setting. This setting applies to a small number of comparisons and assignments that are possible, but not standard conformant, and were allowed in previous versions of HSQLDB.		

Name	Default	Description
SET DATABASE SQL TYPES { TRUE FALSE }		

Table 13.17. Foreign Key Triggered Data Change

Name	Default	Description
sql.enforce_tdc_delete	true	enforcing triggered data change violation for deletes
<p>The ON DELETE and ON UPDATE clauses of constraints cause data changes in rows in different tables or the same table. When there are multiple constraints, a row may be updated by one constraint and deleted by another constraint in the same operation. This is not allowed by default. Changing this property to false allows such violations of the Standard to pass without an exception. Used for porting from database engines that do not enforce the constraints.</p>		
SET DATABASE SQL TDC DELETE { TRUE FALSE }		
sql.enforce_tdc_update	true	enforcing triggered data change violation for updates
<p>The ON DELETE and ON UPDATE clauses of foreign key constraints cause data changes in rows in different tables or the same table. With multiple constraint, a field may be updated by two constraints and set to different values. This is not allowed by default. Changing this property to false allows such violations of the Standard to pass without an exception. Used for porting from database engines that do not enforce the constraints properly.</p>		
SET DATABASE SQL TDC UPDATE { TRUE FALSE }		

Table 13.18. Use of LOB for LONGVAR Types

Name	Default	Description
sql.longvar_is_lob	false	translating longvarchar and longvarbinary to lob
<p>This property, when set true, causes type declarations using LONGVARCHAR and LONGVARBINARY to be translated to CLOB and BLOB respectively. By default, they are translated to VARCHAR and VARBINARY.</p>		
SET DATABASE SQL LONGVAR IS LOB { TRUE FALSE }		

Table 13.19. Type of string literals in CASE WHEN

Name	Default	Description
sql.char_literal	true	result of CASE WHEN with strings of different lengths
<p>This property, when set false, sets the type of all string literal to VARCHAR, as opposed to CHARACTER. This results in strings not being padded with spaces by CASE WHEN expressions.</p>		
SET DATABASE SQL CHARACTER LITERAL { TRUE FALSE }		

Table 13.20. Concatenation with NULL

Name	Default	Description
sql.concat_nulls	true	behaviour of concatenation involving one null
<p>This property, when set false, causes the concatenation of a null and a not null value to return the not null value. By default, it returns null.</p>		
SET DATABASE SQL CONCAT NULLS { TRUE FALSE }		

Table 13.21. NULL in Multi-Column UNIQUE Constraints

Name	Default	Description
sql.unique_nulls	true	behaviour of multi-column UNIQUE constraints with null values
This property, when set false, causes multi-column unique constraints to be more restrictive for value sets that contain a mix of null and not null values.		
<code>SET DATABASE SQL UNIQUE NULLS { TRUE FALSE }</code>		

Table 13.22. Truncation or Rounding in Type Conversion

Name	Default	Description
sql.convert_trunc	true	behaviour of type conversion from DOUBLE to integral types
This property, when set false, causes type conversions from DOUBLE to any integral type to use rounding. By default truncation is used.		
<code>SET DATABASE SQL CONVERT TRUNCATE { TRUE FALSE }</code>		

Table 13.23. Decimal Scale of Division and AVG Values

Name	Default	Description
sql.avg_scale	0	decimal scale of values returned by division and the AVG and MEDIAN aggregate functions
By default, the result of a division or an AVG or MEDIAN aggregate has the same type and scale as the aggregated value. For INTEGER types, the scale is 0. When this property is set to a value other than the default 0, then the scale is used if it is greater than the scale of the divisor or aggregated value. This property does not affect DOUBLE values. Values between 0 - 10 can be used for this property.		
<code>SET DATABASE SQL AVG SCALE <numeric value></code>		

Table 13.24. Support for NaN values

Name	Default	Description
sql.double_nan	true	behaviour of expressions returning DOUBLE NaN
This property, when set false, causes division of DOUBLE values by Zero to return a Double.NaN value. By default an exception is thrown.		
<code>SET DATABASE SQL DOUBLE NAN { TRUE FALSE }</code>		

Table 13.25. Sort order of NULL values

Name	Default	Description
sql.nulls_first	true	ordering of NULL values
By default, nulls appear before not-null values when a result set is ordered without specifying NULLS FIRST or NULLS LAST. This property, when set false, causes nulls to appear by default after not-null values in result sets with ORDER BY		
<code>SET DATABASE SQL NULLS FIRST { TRUE FALSE }</code>		

Table 13.26. Sort order of NULL values with DESC

Name	Default	Description
sql.nulls_order	true	ordering of NULL values when DESC is used
<p>By default, when an ORDER BY clause that does not specify NULLS FIRST or NULLS LAST is used, nulls are ordered according to the <code>sql.nulls_first</code> setting even when DESC is used after ORDER BY. This property, when set false, causes nulls to appear in the opposite position when DESC is used.</p>		
<pre>SET DATABASE SQL NULLS ORDER { TRUE FALSE }</pre>		

Table 13.27. String comparison with padding

Name	Default	Description
sql.pad_space	true	ordering of strings with trailing spaces
<p>By default, when two strings are compared, the shorter string is padded with spaces before comparison. When this property is set false, no padding takes place before comparison. Without padding, the shorter string is never equal to the longer one.</p> <p>Before version 2.0, HSQLDB used NO PAD comparison. If you need the old behaviour, use this property when opening an older database.</p>		
<pre>SET DEFAULT COLLATION <collation name> [NO PAD PAD SPACE]</pre>		

Table 13.28. Case Insensitive Varchar columns

Name	Default	Description
sql.ignore_case	false	case-insensitive VARCHAR
<p>When this property is set true, all VARCHAR declarations in CREATE TABLE and other statements are assigned an Upper Case Comparison collation, SQL_TEXT_UCC. This is designed for compatibility with some databases that use case-insensitive comparison. It is better to specify the collation selectively for specific columns that require it.</p>		
<pre>SET DATABASE COLLATION SQL_TEXT_UCC</pre>		

Table 13.29. Storage of Live Java Objects

Name	Default	Description
sql.live_object	false	storage of Java Objects in OTHER columns with or without serialization
<p>By default when Java Objects are stored in a column of type OTHER, the objects are serialized. Setting this property to true results in the Object to be stored without serialization. This option is available in mem: database only.</p>		
<pre>SET DATABASE LIVE OBJECT</pre>		

Table 13.30. DB2 Style Syntax

Name	Default	Description
sql.syntax_db2	false	support for DB2 style syntax
<p>This property, when set true, allows compatibility with some aspects of this dialect.</p>		

Name	Default	Description
SET DATABASE SQL SYNTAX DB2 { TRUE FALSE }		

Table 13.31. MSSQL Style Syntax

Name	Default	Description
sql.syntax_mss	false	support for MS SQL Server style syntax
This property, when set true, switches the arguments of the CONVERT function and also allow compatibility with some other aspects of this dialect.		
SET DATABASE SQL SYNTAX MSS { TRUE FALSE }		

Table 13.32. MySQL Style Syntax

Name	Default	Description
sql.syntax_mys	false	support for MySQL style syntax
This property, when set true, enables support for TEXT and AUTO_INCREMENT types and also allow compatibility with some other aspects of this dialect.		
SET DATABASE SQL SYNTAX MYS { TRUE FALSE }		

Table 13.33. Oracle Style Syntax

Name	Default	Description
sql.syntax_ora	false	support for Oracle style syntax
This property, when set true, enables support for non-standard types. It also enables DUAL, ROWNUM, NEXTVAL and CURRVAL syntax and and also allow compatibility with some other aspects of this dialect.		
SET DATABASE SQL SYNTAX ORA { TRUE FALSE }		

Table 13.34. PostgreSQL Style Syntax

Name	Default	Description
sql.syntax_pgs	false	support for PostgreSQL style syntax
This property, when set true, enables support for TEXT and SERIAL types. It also enables NEXTVAL, CURRVAL and LASTVAL syntax and also allow compatibility with some other aspects of this dialect.		
SET DATABASE SQL SYNTAX PGS { TRUE FALSE }		

Database Operations Properties

Table 13.35. Default Table Type

Name	Default	Description
hsqldb.default_table_type	memory	type of table created with unqualified CREATE TABLE
The CREATE TABLE command results in a MEMORY table by default. Setting the value <i>cached</i> for this property will result in a cached table by default. The qualified forms such as CREATE MEMORY TABLE or CREATE CACHED TABLE are not affected at all by this property.		

Name	Default	Description
SET DATABASE DEFAULT TABLE TYPE { CACHED MEMORY }		

Table 13.36. Transaction Control Mode

Name	Default	Description
hsqldb.tx	locks	database transaction control mode
Indicates the transaction control mode for the database. The values, locks, mvlocks and mvcc are allowed.		
SET DATABASE TRANSACTION CONTROL { LOCKS MVLOCKS MVCC }		

Table 13.37. Default Isolation Level for Sessions

Name	Default	Description
hsqldb.tx_level	read_committed	database default transaction isolation level
Indicates the default transaction isolation level for each new session. The values, read_committed and serializable are allowed. Individual sessions can change their isolation level.		
SET DATABASE DEFAULT ISOLATION LEVEL { READ COMMITTED SERIALIZABLE }		

Table 13.38. Transaction Rollback in Deadlock

Name	Default	Description
hsqldb.tx_conflict_rollback	true	effect of deadlock or other conflicts on transaction
When a transaction deadlock or other unresolvable conflict is about to happen, the current transaction is rolled back and an exception is raised. When this property is set false, the transaction is not rolled back. Only the latest action that would cause the conflict is undone and an error is returned. The property should not be changed unless the application can quickly perform an alternative statement and complete the transaction. It is provided for compatibility with other database engines which do not roll back the transaction upon deadlock.		
SET DATABASE TRANSACTION ROLLBACK ON CONFLICT { TRUE FALSE }		

Table 13.39. Time Zone and Interval Types

Name	Default	Description
hsqldb.translate_tti_types	true	usage of type codes for advanced datetime and interval types
If the property is true, the TIME / TIMESTAMP WITH TIME ZONE types and INTERVAL types are represented in JDBC methods of ResultSetMetaData and DatabaseMetaData as JDBC datetime types without time zone and the VARCHAR type respectively. The original type names are preserved.		
SET DATABASE SQL TRANSLATE TTI TYPES { TRUE FALSE }		

Database File and Memory Properties

Table 13.40. Opening Database as Read Only

Name	Default	Description
readonly	false	readonly database - is used to open an existing file: database

Name	Default	Description
		This property is a special property that can be added manually to the .properties file, or included in the URL or connection properties. When this property is true, the database becomes readonly. This can be used with an existing database to open it for readonly operation.
this property cannot be set with an SQL statement - it can be used in the .properties file		

Table 13.41. Opening Database Without Modifying the Files

Name	Default	Description
files_readonly	false	readonly files database - is used to open an existing file: database
This property is used similarly to the hsqldb.readonly property. When this property is true, CACHED and TEXT tables are readonly but memory tables are not. Any change to the data is not persisted to database files.		
this property cannot be set with an SQL statement - it can be used in the .properties file		

Table 13.42. Huge database files and tables

Name	Default	Description
hsqldb.large_data	false	enable huge database files - can also be used to open an existing file: database
By default, up to 2 billion rows can be stored in disk-based CACHED tables. Setting this property to true increases the limit to 256 billion rows. This property is used as a connection property.		
this property cannot be set with an SQL statement - it can be used as a connection property for the connection that opens the database		

Table 13.43. Event Logging

Name	Default	Description
hsqldb.applog	0	application logging level - can also be used when opening an existing file: database
The default level 0 indicates no logging. Level 1 results in minimal logging, including any failures. Level 2 indicates all events, including ordinary events. LEVEL 3 adds details of some of the normal operations. The events are logged in a file ending with ".app.log".		
SET DATABASE EVENT LOG LEVEL { 0 1 2 3 }		

Table 13.44. SQL Logging

Name	Default	Description
hsqldb.sqllog	0	sql logging level - can also be used when opening an existing file: database
The default level 0 indicates no logging. Level 1 logs only commits and rollbacks. Level 2 logs all the SQL statements executed, together with their parameter values. Long statements and parameter values are truncated. Level 3 is similar to Level 2 but does not truncate long statements and values. The events are logged in a file ending with ".sql.log". This property applies to existing file: databases as well as new databases.		
SET DATABASE EVENT LOG SQL LEVEL { 0 1 2 3 }		

Table 13.45. Temporary Result Rows in Memory

Name	Default	Description
hsqldb.result_max_memory_rows	0	storage of temporary results and tables in memory or on disk
<p>This property can be set to specify how many rows of each results or temporary table are stored in memory before the table is written to disk. The default is zero and means data is always stored in memory. If this setting is used, it should be set above 1000.</p>		
<pre>SET DATABASE DEFAULT RESULT MEMORY ROWS <numeric value></pre>		

Table 13.46. Rows Cached In Memory

Name	Default	Description
hsqldb.cache_free_count	512	maximum number of unused space recovery - can also be used when opening an existing file: database
<p>The default indicates 512 unused spaces are kept for later use. The value can range between 0 - 8096.</p> <p>When rows are deleted, the space is recovered and kept for reuse for new rows. If too many rows are deleted, the smaller recovered spaces are lost and the largest ones are retained for later use. Normally there is no need to set this property.</p>		
<pre>this property cannot be set with an SQL statement</pre>		

Table 13.47. Rows Cached In Memory

Name	Default	Description
hsqldb.cache_rows	50000	maximum number of rows in memory cache
<p>Indicates the maximum number of rows of cached tables that are held in memory.</p> <p>The value can range between 100- 4 billion. If the value is set via SET FILES CACHE ROWS then it becomes effective after the next database SHUTDOWN.</p>		
<pre>SET FILES CACHE ROWS <numeric value></pre>		

Table 13.48. Size of Rows Cached in Memory

Name	Default	Description
hsqldb.cache_size	10000	memory cache size
<p>Indicates the total size (in kilobytes) of rows in the memory cache used with cached tables. This size is calculated as the binary size of the rows, for example an INTEGER is 4 bytes. The actual memory size used by the objects is 2 to 4 times this value. This depends on the types of objects in database rows, for example with binary objects the factor is less than 2, with character strings, the factor is just over 2 and with date and timestamp objects the factor is over 3.</p> <p>The value can range between 100 KB - 4 GB. The default is 10,000, representing 10,000 kilobytes. If the value is set via SET FILES then it becomes effective after the next database SHUTDOWN or CHECKPOINT.</p>		
<pre>SET FILES CACHE SIZE <numeric value></pre>		

Table 13.49. Size Scale of Disk Table Storage

Name	Default	Description
hsqldb.cache_file_scale	32	unit used for storage of rows in the .data file
<p>The default value corresponds to a maximum size of 64 GB for the .data file. This can be increased to 64, 128, 256, 512, or 1024 resulting in up to 2 TB GB storage. Settings below 32 in older databases are preserved until a SHUTDOWN COMPACT.</p>		
<pre>SET FILES SCALE <numeric value></pre>		

Table 13.50. Size Scale of LOB Storage

Name	Default	Description
hsqldb.lob_file_scale	32	unit used for storage of lobes in the .lobs file
<p>The default value represents units of 32KB. When the average size of individual lobes in the database is smaller, a smaller unit can be used to reduce the overall size of the .lobs file. Values 1, 2, 4, 8, 16, 32 can be used.</p>		
<pre>SET FILES LOB SCALE <numeric value></pre>		

Table 13.51. Compression of BLOB and CLOB data

Name	Default	Description
hsqldb.lob_compressed	false	use of compression for storage of blobs and clobs
<p>The default value is false, indicating no compression. When the value is true at the time of creation of a new database, blobs and clobs are stored as compressed parts.</p>		
<pre>SET FILES LOB COMPRESSED { TRUE FALSE }</pre>		

Table 13.52. Internal Backup of Database Files

Name	Default	Description
hsqldb.inc_backup	true	incremental backup of data file
<p>During updates, the contents of the .data file are modified. When this property is true, the modified contents are backed up gradually. This causes a marginal slowdown in operations, but allows fast checkpoint and shutdown.</p> <p>When the property is false, the .data file is backed up entirely at the time of checkpoint and shutdown. Up to version 1.8, HSQLDB supported only full backup.</p>		
<pre>SET FILES BACKUP INCREMENT { TRUE FALSE }</pre>		

Table 13.53. Use of Lock File

Name	Default	Description
hsqldb.lock_file	true	use of lock file - can also be used with an existing file: database
<p>By default, a lock file is created for each file database that is opened for read and write. This property can be specified with the value false to prevent the lock file from being created. This usage is not recommended but may be desirable when flash type storage is used. This property applies to existing file: databases as well as new databases.</p>		
<pre>this property cannot be set with an SQL statement</pre>		

Table 13.54. Logging Data Change Statements

Name	Default	Description
hsqldb.log_data	true	logging data change
<p>This property can be set to <code>false</code> when database recovery in the event of an unexpected crash is not necessary. A database that is used as a temporary cache is an example. Regardless of the value of this property, if there is a proper shutdown of the database, all the changed data is stored. A checkpoint or shutdown still rewrites the <code>.script</code> file and saves the <code>.backup</code> file according to the other settings.</p>		
<pre>SET FILES LOG { TRUE FALSE }</pre>		

Table 13.55. Automatic Checkpoint Frequency

Name	Default	Description
hsqldb.log_size	50	size of log when checkpoint is performed
<p>The value is the size (in megabytes) that the <code>.log</code> file can reach before an automatic checkpoint occurs. A checkpoint rewrites the <code>.script</code> file and clears the <code>.log</code> file.</p>		
<pre>SET FILES LOG SIZE <numeric value></pre>		

Table 13.56. Automatic Defrag at Checkpoint

Name	Default	Description
hsqldb.defrag_limit	0	percentage of unused space causing a defrag at checkpoint
<p>When a checkpoint is performed, the percentage of wasted space in the <code>.data</code> file is calculated. If the wasted space is above the specified limit, a defrag operation is performed. The default is 0, which means no automatic checkpoint. The numeric value must be between 0 and 100 and is interpreted as a percentage of the current size of the <code>.data</code> file.</p>		
<pre>SET FILES DEFRAG <numeric value></pre>		

Table 13.57. Compression of the .script file

Name	Default	Description
hsqldb.script_format	0	compressed .script file
<p>If the property is set with the value 3, the <code>.script</code> file is stored in compressed format. This is useful for large script files. The <code>.script</code> is no longer readable when the <code>hsqldb.script_format=3</code> has been used.</p>		
<p>This property cannot be set with an SQL statement</p>		

Table 13.58. Logging Data Change Statements Frequency

Name	Default	Description
hsqldb.write_delay	true	write delay performing fsync of log file entries
<p>If the property is true, the default <code>WRITE DELAY</code> property of the database is used, which is 500 milliseconds. If the property is false, the <code>WRITE DELAY</code> is set to 0 seconds. The log is written to file regardless of this property. The property controls the <code>fsync</code> that forces the written log to be persisted to disk. The SQL command for this property allows more precise control over the property.</p>		
<pre>SET FILES WRITE DELAY {{ TRUE FALSE } <seconds value> <milliseconds value> MILLIS</pre>		

Table 13.59. Logging Data Change Statements Frequency

Name	Default	Description
hsqldb.write_delay_millis	500	write delay for performing fsync of log file entries
<p>If the property is used, the WRITE DELAY property of the database is set the given value in milliseconds. The property controls the fsync that forces the written log to be persisted to disk. The SQL command for this property allows the same level of control over the property.</p>		
<pre>SET FILES WRITE DELAY { { TRUE FALSE } <seconds value> <milliseconds value> MILLIS</pre>		

Table 13.60. Use of NIO for Disk Table Storage

Name	Default	Description
hsqldb.nio_data_file	true	use of nio access methods for the .data file
<p>Setting this property to <code>false</code> will avoid the use of nio access methods, resulting in somewhat reduced speed. If the data file is larger than <code>hsqldb.nio_max_size</code> (default 256MB) when it is first opened (or when its size is increased), nio access methods are not used. Also, if the file gets larger than the amount of available computer memory that needs to be allocated for nio access, non-nio access methods are used.</p>		
<pre>SET FILES NIO { TRUE FALSE }</pre>		

Table 13.61. Use of NIO for Disk Table Storage

Name	Default	Description
hsqldb.nio_max_size	256	nio buffer size limit
<p>The maximum size of .data file in mega bytes that can use the nio access method. When the file gets larger than this limit, non-nio access methods are used. Values 64, 128, 256, 512, 1024, and larger multiples of 512 can be used. The default is 256MB.</p>		
<pre>SET FILES NIO SIZE <numeric value></pre>		

Table 13.62. Recovery Log Processing

Name	Default	Description
hsqldb.full_log_replay	false	recovery log processing
<p>The .log file is processed during recovery after a forced shutdown. Out of memory conditions always abort the startup. Any other exception stops the processing of the .log file and by default, continues the startup process. If this property is true, the startup process is stopped if any exception occurs. Exceptions are usually caused by incomplete lines of SQL statements near the end of the .log file, which were not fully synced to disk when an abnormal shutdown occurred.</p>		
<p>This property cannot be set with an SQL statement</p>		

Table 13.63. Default Properties for TEXT Tables

Name	Default	Description
textdb.*	0	default properties for new text tables
<p>Properties that override the database engine defaults for newly created text tables. Settings in the text table <code>SET <tablename> SOURCE <source string></code> command override both the engine defaults and the database properties defaults. Individual <code>textdb.*</code> properties are listed in the <code>Text Tables</code> chapter.</p>		

Table 13.64. Forcing Garbage Collection

Name	Default	Description
runtime.gc_interval	0	forced garbage collection
This setting forces garbage collection each time a set number of result set row or cache row objects are created. The default, "0" means no garbage collection is forced by the program.		
<code>SET DATABASE GC <numeric value></code>		

Crypt Properties

Table 13.65. Crypt Property For LOBs

Name	Default	Description
crypt_lob	false	encryption of lob
If the property is true, the contents of the .lob file is encrypted as well.		
this property cannot be set with an SQL statement		

Table 13.66. Cipher Key for Encrypted Database

Name	Default	Description
crypt_key	none	encryption
The cipher key for an encrypted database.		
this property cannot be set with an SQL statement		

Table 13.67. Crypt Provider Encrypted Database

Name	Default	Description
crypt_provider	none	encryption
The fully-qualified class name of the cryptography provider. This property is not used for the default security provider.		
this property cannot be set with an SQL statement		

Table 13.68. Cipher Specification for Encrypted Database

Name	Default	Description
crypt_type	none	encryption
The cipher specification.		
this property cannot be set with an SQL statement		

When connecting to an *in-process* database creates a new database, or opens an existing database (i.e. it is the first connection made to the database by the application), all the user-defined database properties listed in this section can be specified as URL properties.

When HSQLDB is used with OpenOffice.org as an external database, the property "default_schema=true" must be set on the URL, otherwise the program will not operate correctly as it does with its built-in hsqldb instance.

System Properties

A few system properties are used by HyperSQL. These are set on the Java command line or by calling `System.setProperty()` from the user's program. They are not valid as URL or connection properties.

Table 13.69. Logging Framework

Name	Default	Description
hsqldb.reconfig_logging	true	configuring the framework logging
Setting this system property false avoids reconfiguring the framework logging system such as Log4J or java.util.Logging. If the property does not exist or is true, reconfiguration takes place.		

Table 13.70. Text Tables

Name	Default	Description
textdb.allow_full_path	false	text table file locations
Setting this system property true allows text table sources and files to be opened on all available paths. It also allows pure mem: databases to open such files. By default, only the database directory and its subdirectories are allowed. See the Text Tables chapter.		

Table 13.71. Java Functions

Name	Default	Description
hsqldb.method_class_names	none	allowed Java classes
This property needs to be set with the names (including wildcards) of Java classes that can be used for routines based on Java static methods. See the SQL Invoked Routines chapter.		

Chapter 14. HyperSQL Network Listeners (Servers)

Server, WebServer, and Servlet

Fred Toussi, The HSQL Development Group

\$Revision: 5639 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.
2016-05-15 15:57:21-0400

Listeners

As described in the [Running and Using HyperSQL](#) chapter, network listeners (servers) provide connectivity to catalogs from different JVM processes. The HyperSQL listeners support both ipv4 and ipv6 network addressing.

HyperSQL Server

This is the preferred way of running a database server and the fastest one. This mode uses the proprietary *hsql:* communications protocol. The following example of the command for starting the server starts the server with one (default) database with files named "mydb.*" and the public name (alias) of "xdb". Note the database property to set the transaction mode to MVCC is appended to the database file path.

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.Server --database.0 file:mydb;hsqldb.tx=mvcc --dbname.0 xdb
```

Alternatively, a `server.properties` file can be used for passing the arguments to the server. This file must be located in the directory where the command is issued.

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.Server
```

Alternatively, you can specify the path of the `server.properties` file on the command line. In this case, the properties file can have any name or extension, but it should be a valid properties file.

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.Server --props myserver.props
```

Use the `--help` argument to see the list of available arguments.

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.Server --help
```

The contents of the `server.properties` file is described in the next section.

HyperSQL HTTP Server

This method of access is used when the computer hosting the database server is restricted to the HTTP protocol. The only reason for using this method of access is restrictions imposed by firewalls on the client or server machines and it should not be used where there are no such restrictions. The HyperSQL HTTP Server is a special web server that allows JDBC clients to connect via HTTP. The server can also act as a small general-purpose web server for static pages.

To run an HTTP server, replace the main class for the server in the example command line above with the following:

```
java -cp ../lib/hsqldb.jar org.hsqldb.server.WebServer
```

The contents of the `server.properties` file is described in the next section.

HyperSQL HTTP Servlet

This method of access also uses the HTTP protocol. It is used when a separate servlet engine (or application server) such as Tomcat or Resin provides access to the database. The Servlet Mode cannot be started independently from the servlet engine. The `Servlet` class, in the HSQLDB jar, should be installed on the application server to provide the connection. The database is specified using an application server property. Refer to the source file `src/org/hsqldb/server/Servlet.java` to see the details.

Both HTTP Server and Servlet modes can only be accessed using the JDBC driver at the client end. They do not provide a web front end to the database. The Servlet mode can serve only a single database.

Please note that you do not normally use this mode if you are using the database engine in an application server. In this situation, connections to a catalog are usually made *in-process*, or using an external HSQL Server instance.

Server and Web Server Properties

Properties files for running the servers are not created automatically. You should create your own files that contain `server.property=value` pairs for each property. The `server.properties` or `webserver.properties` files must be located in the directory where the command to run the `org.hsqldb.server.Server` class is issued.

In all properties files, values are case-sensitive. All values apart from names of files or pages are required in lowercase (e.g. `server.silent=FALSE` will have no effect, but `server.silent=false` will work). Supported properties and their default values (if any) are as follows:

Table 14.1. common server and webserver properties

Value	Default	Description
<code>server.database.0</code>	<code>file:test</code>	the catalog type, path and file name of the first database file to use
<code>server.dbname.0</code>	<code>" "</code>	lowercase server alias for the first database file
<code>server.database.n</code>	<code>NO DEFAULT</code>	the catalog type, path and file name of the n'th database file in use
<code>server.dbname.n</code>	<code>NO DEFAULT</code>	lowercase server alias for the n'th database file
<code>server.silent</code>	<code>true</code>	no extensive messages displayed on console
<code>server.trace</code>	<code>false</code>	JDBC trace messages displayed on console
<code>server.address</code>	<code>NO DEFAULT</code>	IP address of server
<code>server.tls</code>	<code>false</code>	Whether to encrypt network stream. If this is set to <code>true</code> , then in normal situations you will also need to set properties <code>system.java.net.ssl.keyStore</code> and <code>system.java.net.ssl.keyStorePassword</code> , as documented elsewhere. The value of <code>server.tls</code> impacts the default value of <code>server.port</code> .
<code>server.daemon</code>	<code>false</code>	Whether the server is run as a daemon

Value	Default	Description
server.remote_open	false	Allows opening a database path remotely when the first connection is made

In HyperSQL version 2.0, each server can serve an unlimited number of databases simultaneously. The `server.database.0` property defines the filename / path whereas the `server.dbname.0` defines the lowercase alias used by clients to connect to that database. The digit 0 is incremented for the second database and so on. Values for the `server.database.n` property can use the *mem:*, *file:* or *res:* prefixes and connection properties as discussed under CONNECTIONS. For example,

```
database.0=mem:temp;sql.enforce_strict_size=true;
```

Properties or default values specific to `server.properties` are:

Table 14.2. server properties

Value	Default	Description
server.port	9001 (normal) or 554 (if TLS encrypted)	TCP/IP port used for talking to clients. All databases are served on the same port.
server.no_system_exit	true	no <code>System.exit()</code> call when the database is closed

Properties or default values specific to `webserver.properties` are:

Table 14.3. webserver properties

Value	Default	Description
server.port	80 (normal) or 443 (if TLS encrypted)	TCP/IP port used for talking to clients
server.default_page	index.html	the default web page for server
server.root	./	the location of served pages
.<extension>	NO DEFAULT	multiple entries such as <code>.html=text/html</code> define the mime types of the static files served by the web server. See the source for <code>src/org/hsqldb/server/WebServer.java</code> for a list.

An example of the contents of a `server.properties` file is given below:

```
server.database.0=file:/opt/db/accounts
server.dbname.0=accounts

server.database.1=file:/opt/db/mydb
server.dbname.1=enrolments

server.database.2=mem:adatabase
server.dbname.2=quickdb
```

In the above example, the `server.properties` file indicates that the server provides access to 3 different databases. Two of the databases are file-based, while the third is all-in-memory. The aliases for the databases that the users connect to are `accounts`, `enrolments` and `quickdb`.

All the above properties and their values can be specified on the command line to start the server by omitting the `server.` prefix. If a property/value pair is specified on the command line, it overrides the property value specified in the `server.properties` or `webserver.properties` file.



Note

Upgrading: If you have existing custom properties files, change the values to the new naming convention. Note the use of digits at the end of `server.database.n` and `server.dbname.n` properties.

Starting a Server from your Application

If you want to start the server from within your application, as opposed to the command line or batch files, you should create an instance of `Server` or `Web Server`, then assign the properties and start the `Server`. An working example of this can be found in the `org.hsqldb.test.TestBase` source. The example below sets the same properties as in the `server.properties` file example.

```
HsqlProperties p = new HsqlProperties();
p.setProperty("server.database.0", "file:/opt/db/accounts");
p.setProperty("server.dbname.0", "an_alias");
// set up the rest of properties

// alternative to the above is
Server server = new Server();
server.setProperties(p);
server.setLogWriter(null); // can use custom writer
server.setErrWriter(null); // can use custom writer
server.start();
```

Shutting down a Server from your Application

To shut down the server, you can execute the SQL "SHUTDOWN" statement on the server databases. When you start the server from your application and keep a reference to the java `Server` object, you can also shut it down programatically. Calling the `shutdownCatalogs(int shutdownMode)` method of `org.hsqldb.server.Server` closes all the open databases, which results in server shutdown. The parameter value is normally 1, which indicates normal shutdown. Other modes of shutdown, such as SHUTDOWN IMMEDIATELY are also supported. See the javadoc for `org.hsqldb.server.Server`. See the example below:

```
server.shutdownCatalogs(1);
```

The `Server` object has several alternative methods for setting databases and their public names. The server should be shutdown using the `shutdown()` method.

Allowing a Connection to Open or Create a Database

If the `server.remote_open` property is true, the `Server` works differently from the normal mode. In this mode, it is not necessary to have any databases listed as `server.database.0` etc. in the `Server` startup properties. If there are databases listed, they are opened as normal. The server does not shutdown when the last database is closed.

In this mode, a connection can be established to a database that is not open or does not exist. The server will open the database or create it, then return a connection to the database.

The connection URL must include the path to the database, separated with a semicolon from the alias. In the example below, the database path specified as `file:C:/files/mydatabase` is opened and the database alias `xdb` is assigned to the database. After this, the next connection to the specified alias will connect to the same database. Any database path on the URL is ignored if the alias is serving a database.

The database path can point to a `file:` or `mem:` database.

If you use database properties on the URL, these properties are used when the new database is created. If no database properties are used on the URL, you can also specify the path with `filepath=<path>`. Examples below:

```
Connection c = DriverManager.getConnection("jdbc:hsqldb:hsq://localhost/xd;file:C:/files/mydatabase", "SA", "");
Connection c = DriverManager.getConnection("jdbc:hsqldb:hsq://localhost/xd;mem:test;sql.enforce_types=true", "SA", "");
Connection c = DriverManager.getConnection("jdbc:hsqldb:hsq://localhost/xd;filepath=file:C:/files/mydatabase", "SA", "");
```

Specifying Database Properties at Server Start

Each database started by a Server has its own URL. When new databases are created by the server, the database properties for each of the new database can be appended to the database URL. Examples below:

```
// example in server.properties file
server.database.0=file:/opt/db/accounts;hsqldb.default_table_type=cached;sql.enforce_names=true
server.dbname.0=accounts

// example for setting the property programatically
HsqlProperties p = new HsqlProperties();
p.setProperty("server.database.0", "file:/opt/db/accounts;hsqldb.default_table_type=cached;sql.enforce_names=true");
```

The specified properties apply only to a new database. They have no effect on an existing database apart from a few properties such as `readonly` listed in the `Properties` chapter.

TLS Encryption

Listener TLS Support (a. k. a. SSL)

Blaine Simpson, The HSQL Development Group
\$Revision: 5639 \$
2016-05-15 15:57:21-0400

This section explains how to encrypt the stream between JDBC network clients and HyperSQL Listeners. If you are running an *in-process* (non-Listener) setup, this chapter does not apply to you.

Requirements

Hsqldb TLS Support Requirements

- Java 4 and greater versions support JSSE.
- A JKS keystore containing a private key, in order to run a Listener.
- If you are running the listener side, then you'll need to run a HSQLDB Server or WebServer Listener instance. It doesn't matter if the underlying database catalogs are new, and it doesn't matter if you are making a new Listener configuration or encrypting an existing Listener configuration. (You can turn encryption on and off at will).
- You need a HSQLDB jar file that was built with JSSE present. If you obtained your HSQLDB distribution from us, you are all set, because we build with Java 1.4 or later (which contains JSSE).

Encrypting your JDBC connection

At this time, only 1-way, server-cert encryption is tested.

Client-Side

Just use one of the following protocol prefixes.

Hsqldb TLS URL Prefixes

- `jdbc:hsqldb:hsqldb://`
- `jdbc:hsqldb:https://`

The latter will only work for clients running with Java 1.4 or later.

If the listener you wish to connect to is using a certificate approved by your default trust keystore, then there is nothing else to do. If not, then you need to tell Java to "trust" the server cert. (It's a slight over-simplification to say that if the server certificate was purchased, then you are all set; if somebody "signed their own" certificate by self-signing or using a private ca certificate, then you need to set up trust).

First, you need to obtain the cert (only the "public" part of it). Since this cert is passed to all clients, you could obtain it by writing a Java client that dumps it to file, or perhaps by using *openssl s_client*. Since in most cases, if you want to trust a non-commercial cert, you probably have access to the server keystore, I'll show an example of how to get what you need from the server-side JKS keystore.

You may already have an X509 cert for your server. If you have a server keystore, then you can generate a X509 cert like this.

Example 14.1. Exporting certificate from the server's keystore

```
keytool -export -keystore server.store -alias existing_alias -file server.cer
```

In this example, `server.cer` is the X509 certificate that you need for the next step.

Now, you need to add this cert to one of the system trust keystores or to a keystore of your own. See the Customizing Stores section in [JSSERefGuide.html](http://java.sun.com/javase/6/docs/technotes/guides/security/jsse/JSSERefGuide.html#CustomizingStores) [http://java.sun.com/javase/6/docs/technotes/guides/security/jsse/JSSERefGuide.html#CustomizingStores] to see where your system trust keystores are. You can put private keystores anywhere you want to. The following command will add the cert to an existing keystore, or create a new keystore if `client.store` doesn't exist.

Example 14.2. Adding a certificate to the client keystore

```
keytool -import -trustcacerts -keystore trust.store -alias new_alias -file server.cer
```

If you are making a new keystore, you probably want to start with a copy of your system default keystore which you can find somewhere under your `JAVA_HOME` directory (typically `jre/lib/security/cacerts` for a JDK, but I forget exactly where it is for a JRE).

Unless your OS can't stop other people from writing to your files, you probably do not want to set a password on the trust keystore.

If you added the cert to a system trust store, then you are finished. Otherwise you will need to specify your custom trust keystore to your client program. The generic way to set the trust keystore is to set the system property `javax.net.ssl.trustStore` every time that you run your client program. For example

Example 14.3. Specifying your own trust store to a JDBC client

```
java -Djavax.net.ssl.trustStore=/home/blaine/trust.store -jar /path/to/hsqldb.jar dest-urlid
```

This example runs the program `SqlTool`. `SqlTool` has built-in TLS support however, so, for `SqlTool` you can set `truststore` on a per-urlid basis in the `SqlTool` configuration file.

Note: The hostname in your database URL must match the *Common Name* of the server's certificate exactly. That means that if a site certificate is `admc.com`, you can not use `jdbc:hsqldb:hsqsls://localhost` or `jdbc:hsqldb:hsqsls://www.admc.com:1100` to connect to it.

If you want more details on anything, see `JSSERefGuide.html` on Sun's site [<http://java.sun.com/javase/6/docs/technotes/guides/security/jsse/JSSERefGuide.html>], or in the subdirectory `docs/guide/security/jsse` of your Java SE docs.

Server-Side (Listener-Side)

Get yourself a JKS keystore containing a private key. Then set properties `server.tls`, `system.javax.net.ssl.keyStore` and `system.javax.net.ssl.keyStorePassword` in your `server.properties` or `webserver.properties` file. Set `server.tls` to `true`, `system.javax.net.ssl.keyStore` to the path of the private key JKS keystore, and `system.javax.net.ssl.keyStorePassword` to the password (of both the keystore and the private key record-- they must be the same). If you specify relative file path values, they will be resolved relative to the `user.dir` when the JRE is started.



Caution

If you set any password in a `.properties` (or any other) file, you need to restrict access to the file. On a good operating system, you can do this like so:

```
chmod 600 path/to/server.properties
```

The values and behavior of the `system.*` settings above match the usage documented for `javax.net.ssl.keyStorePassword` and `javax.net.ssl.keyStore` in the JSSE docs.



Note

Before version 2.0, HyperSQL depended on directly setting the corresponding JSSE properties. The new idiom is more secure and easier to manage. If you have an old password in a UNIX init script config file, you should remove it.

Making a Private-key Keystore

There are two main ways to do this. Either you can use a certificate signed by a certificate authority, or you can make your own. One thing that you need to know in both cases is, the *Common Name* of the cert has to be the exact hostname that JDBC clients will use in their database URL.

CA-Signed Cert

I'm not going to tell you how to get a CA-signed SSL certificate. That is well documented at many other places.

Assuming that you have a standard pem-style private key certificate, here's how you can use `openssl` [<http://www.openssl.org>] and the program `DERImport` to get it into a JKS keystore.

Because I have spent a lot of time on this document already, I am just giving you an example.

Example 14.4. Getting a pem-style private key into a JKS keystore

```
openssl pkcs8 -topk8 -outform DER -in Xpvk.pem -inform PEM -out Xpvk.pk8 -nocrypt
```

```
openssl x509 -in Xcert.pem -out Xcert.der -outform DER
java DERImport new.keystore NEWALIAS Xpvk.pk8 Xcert.der
```



Important

Make sure to set the password of the key exactly the same as the password for the keystore!

You need the program `DERImport.class` of course. Do some internet searches to find `DERImport.java` or `DERImport.class` and download it.

If `DERImport` has become difficult to obtain, I can write a program to do the same thing-- just let me know.

Non-CA-Signed Cert

Run `man keytool` or see the `Creating a Keystore` section of `JSSERefGuide.html` [<http://java.sun.com/javase/6/docs/technotes/guides/security/jsse/JSSERefGuide.html#CreateKeystore>].

Automatic Server or WebServer startup on UNIX

If you are on UNIX and want to automatically start and stop a Server or WebServer running with encryption, set the `system.javax.net.ssl.keyStore` and `system.javax.net.ssl.keyStorePassword` properties as instructed above, and follow the instructions in the `HyperSQL on UNIX` chapter, paying close attention to the TLS-related comments in the template config file.

If you are using a private server certificate, make sure to also set the trust store filepath for relevant urlids in your RC file, as explained in the sample config file .

Network Access Control

(Server ACLs)

JDBC connections will always be denied if the supplied user and password are not found in the target catalog. But an HyperSQL listener can also restrict access at the listener level, even protecting private catalogs which have insecure (or default) passwords. If you have an *in-process* setup, this section of the Guide doesn't apply to you.

Many (in fact, most) distributed database applications don't have application clients connect directly to the database, but instead encapsulate access in a controlling process. For example, a web app will usually access the data source on behalf of users, with end-user web browsers never accessing the database directly. In these cases and others, the security benefits of restricting listener access to specific source addresses is well worth the effort. ACLs work by restricting access according to the source address of the incoming connection request. This is efficient because the database engine never even gets the request until it is approved by the ACL filter code.

The sample file `sample/acl.txt` in your HyperSQL distribution explains how to write an ACL file.

```
# $Id: acl.txt 826 2009-01-17 05:04:52Z unsaved $

# Sample HyperSQL Network Listener ACL file.
# Specify "allow" and "deny" rules
# For address specifications, individual addresses, host names, and
# network addresses with /bit suffix are allowed, but read the caveat about
# host names below, under the sample "localhost" rule.

# Blank lines ignored.
# Lines with # as the first non-whitespace character are ignored.

allow 2001:db8::/32
```

```
# Allow this 32-bit ipv4 subnet

allow localhost
# You should use numerical addresses in ACL files, unless you are certain that
# the name will always be known to your network address resolution system
# (assume that you will lose Internet connectivity at some time).
# With a default name resolution setup on UNIX, you are safe to use names
# defined in your /etc/hosts file.

deny 192.168.101.253
# Deny a single IP address.
# In our example, 192.168.101.0/24 is our local, organizational network.
# 192.168.101.253 is the IP address of our Intern's PC.
# The Intern does not have permission to access our databases directly.

allow 192.168.101.0/24

# Any ipv4 or ipv6 candidate address not matched above will be denied
```

You put your file wherever it is convenient for you, and specify that path with the property `server.acl` or `webserver.acl` in your `server.properties` or `webserver.properties` file (depending on whether your listener instance is a `Server` or `WebServer`). You can specify the ACL file path with an absolute or relative path. If you use a relative path, it must be relative to the `.properties` file. It's often convenient to name the ACL file `acl.txt`, in the same directory as your `.properties` file and specify the property value as just `acl.txt`. This file name is intuitive, and things will continue to work as expected if you move or copy the entire directory.



Warning

If your `Server` or `WebServer` was started with a `*.acl` property, changes afterwards to the ACL file will be picked up immediately by your listener instance. You are advised to use the procedure below to prevent partial edits or mistakes from crippling your running server.

When you edit your ACL file, it is both more convenient and more secure to test it as explained here before activating it. You could, of course, test an ACL file by editing it in-place, then trying to connect to your listener with JDBC clients from various source addresses. Besides being mightily laborious and boring, with this method it is very easy to accidentally open access to all source addresses or to deny access to all users until you fix incorrect ACL entries.

The suggested method of creating or changing ACLs is to work with an inactive file (for new ACL files, just don't enable the `*.acl` property yet; for changing an existing file, just copy it to a temporary file and edit the temporary file). Then use the `ServerAcl` class to test it.

Example 14.5. Validating and Testing an ACL file

```
java -cp path/to/hsqldb.jar org.hsqldb.server.ServerAcl path/to/acl.txt
```

If the specified ACL file fails validation, you will be given details about the problem. Otherwise, the validated rules will be displayed (including the implicit, default deny rules). You then type in host names and addresses, one-per-line. Each name or address is tested as if it were a HyperSQL network client address, using the same exact method that the HyperSQL listener will use. (HyperSQL listeners use this same `ServerAcl` class to test incoming source addresses). `ServerAcl` will report the rule which matches and whether access is denied or allowed to that address.

If you have edited a copy of an existing ACL file (as suggested above), then overwrite your live ACL file with your new, validated ACL file. I.e., copy your temp file over top of your live ACL file.

`ServerAcl` can be run in the same exact way described above, to troubleshoot runtime access issues. If you use an ACL file and a user or application can't get a connection to the database, you can run `ServerAcl` to quickly and definitively find if the client is being prohibited by an ACL rule.

Chapter 15. HyperSQL on UNIX

How to quickly get a HyperSQL Listener up and running on UNIX, including Mac OS X

Blaine Simpson, The HSQL Development Group

\$Revision: 5582 \$
2016-05-15 15:57:21-0400

Purpose

This chapter explains how to quickly install, run, and use a HyperSQL Listener (aka Server) on UNIX.

Note that, unlike a traditional database server, there are many use cases where it makes sense to run HyperSQL without any listener. This type of setup is called *in-process*, and is not covered here, since there is no UNIX-specific setup in that case.

I intend to cover what I think is the most common UNIX setup: To run a multi-user, externally-accessible catalog with permanent data persistence. (By the latter I mean that data is stored to disk so that the catalog data will persist across process shutdowns and startups). I also cover how to run the Listener as a system daemon.

When I give sample shell commands below, I use commands which will work in Bourne-compatible shells, including Bash and Korn. Users who insist on using the inferior C-shells will need to convert.

Installation

Go to <http://sourceforge.net/projects/hsqldb> and click on the "files" link. You want the current version. I can't be more specific because SourceForge/Geeknet are likely to continue changing their interface. See if there's a distribution for the current HSQLDB version in the format that you want.

If you want a binary package and we either don't provide it, or you prefer somebody else's build, you should still find out the current version of HyperSQL available at SourceForge. It's very likely that you can find a binary package for your UNIX variant with your OS distributor, <http://www.jpackage.org/>, <http://sunfreeware.com/>, etc. Nowadays, most UNIXes have software package management systems which check Internet repositories. Just search the repositories for "hsqldb" and "hypersql". The challenge is to find an *up-to-date* package. You will get better features and support if you work with the current stable release of HyperSQL. (In particular, HyperSQL version 2.0.0 added tons of new features). Pay attention to what JVM versions your binary package supports. Our builds (version 2.0 and later) document the Java version it was built with in the file `doc/index.html`, but you can't depend on this if somebody else assembled your distribution. Java jar files are generally compatible with the same or greater major versions. For example, if your `hsqldb.jar` was built with Java 1.3.6-11, then it is compatible with Java versions 1.3.* and greater.



Note

It could very well happen that some of the file formats which I discuss below are not in fact offered. If so, then we have not gotten around to building them.

Binary installation depends on the package format that you downloaded.

Installing from a .pkg.Z file

This package is only for use by a Solaris super-user. It's a System V package. Download then uncompress the package with `uncompress` or `gunzip`

```
uncompress filename.pkg.Z
```

You can read about the package by running

```
pkginfo -l -d filename.pkg
```

Run `pkgadd` as root to install.

```
pkgadd -d filename.pkg
```

Installing from a BSD Port or Package

You're on your own. I find everything much easier when I install software to BSD without their package management systems.

Installing from a `.rpm` file

Just skip this section if you know how to install an RPM. If you found the RPM using a software management system, then just have it install it. The remainder of item explains a generic command-line method which should work with any Linux variant. After you download the rpm, you can read about it by running

```
rpm -qip /path/to/file.rpm
```

Rpms can be installed or upgraded by running

```
rpm -Uvh /path/to/file.rpm
```

as root. Suse users may want to keep Yast aware of installed packages by running rpm through Yast: `yast2 -i /path/to/file.rpm`.

Installing from a `.zip` file

Extract the zip file in an ancestor directory of the new HSQLDB home. You don't need to create the HSQLDB_HOME directory because the extraction will create a version-labelled directory, and the subdirectory "hsqldb". This "hsqldb" directory is your HSQLDB_HOME, and you can move it to wherever you wish. If you will be upgrading or maintaining multiple versions of HyperSQL, you will want to retain the version number in the directory tree somehow.

```
cd ancestor/of/new/hsqldb/home
unzip /path/to/file.zip
```

All the files in the zip archive will be extracted to underneath a new subdirectory named like `hsqldb-2.0.2a/hsqldb`.

Take a look at the files you installed. (Under `hsqldb` for zip file installations. Otherwise, use the utilities for your packaging system). The most important file of the HyperSQL system is `hsqldb.jar`, which resides in the subdirectory `lib`. Depending on who built your distribution, your file name may have a version label in it, like `hsqldb-1.2.3.4.jar`.



Important

For the purposes of this chapter, I define HSQLDB_HOME to be the parent directory of the lib directory that contains `hsqldb.jar`. E.g., if your path to `hsqldb.jar` is `/a/b/hsqldb/lib/hsqldb.jar`, then your HSQLDB_HOME is `/a/b/hsqldb`.

Furthermore, unless I state otherwise, all local file paths that I give are relative to the HSQLDB_HOME.

If the description of your distribution says that the `hsqldb.jar` file will work for your Java version, then you are finished with installation. Otherwise you need to build a new `hsqldb.jar` file.

If you followed the instructions above and you still don't know what Java version your `hsqldb.jar` supports, then try reading documentation files like `readme.txt`, `README.TXT`, `INSTALL.txt` etc. (As I said above, our newer

distributions always document the Java version for the build, in the file `doc/index.html`). If that still doesn't help, then you can just try your `hsqldb.jar` and see if it works, or build your own.

To use the supplied `hsqldb.jar`, just skip to the next section of this document. Otherwise build a new `hsqldb.jar`.

Procedure 15.1. Building `hsqldb.jar`

1. If you don't already have Ant, download the latest stable binary version from <http://ant.apache.org>. `cd` to where you want Ant to live, and extract from the archive with

```
unzip /path/to/file.zip
```

or

```
tar -xzf /path/to/file.tar.gz
```

or

```
bunzip2 -c /path/to/file.tar.bz2 | tar -xzf -
```

Everything will be installed into a new subdirectory named `apache-ant- + version`. You can rename the directory after the extraction if you wish.

2. Set the environmental variable `JAVA_HOME` to the base directory of your Java JRE or SDK, like

```
export JAVA_HOME; JAVA_HOME=/usr/java/j2sdk1.4.0
```

The location is entirely dependent upon your variety of UNIX. Sun's rpm distributions of Java normally install to `/usr/java/something`. Sun's System V package distributions of Java (including those that come with Solaris) normally install to `/usr/something`, with a sym-link from `/usr/java` to the default version (so for Solaris you will usually set `JAVA_HOME` to `/usr/java`).

3. Remove the existing file `HSQLDB_HOME/lib/hsqldb.jar`.
4. `cd` to `HSQLDB_HOME/build`. Make sure that the `bin` directory under your Ant home is in your search path. Run the following command.

```
ant hsqldb
```

This will build a new `HSQLDB_HOME/lib/hsqldb.jar`.

See the [Building HyperSQL Jars](#) appendix if you want to build anything other than `hsqldb.jar` with all default settings.

Setting up a HyperSQL Persistent Database Catalog and a HyperSQL Network Listener

If you installed from an OS-specific package, you may already have a catalog and listener pre-configured. See if your package includes a file named `server.properties` (make use of your packaging utilities). If you do, then I suggest that you still read this section while you poke around, in order to understand your setup.

1. Select a UNIX user to run the database process (JVM) as. If this database is for the use of multiple users, or is a production system (or to emulate a production system), you should dedicate a UNIX user for this purpose. In my examples, I use the user name `hsqldb`. In this chapter, I refer to this user as the `HSQLDB_OWNER`, since that user will own the database catalog files and the JVM processes.

If the account doesn't exist, then create it. On all system-5 UNIXes and most hybrids (including Linux), you can run (as root) something like

```
useradd -c 'HSQLDB Database Owner' -s /bin/bash -m hsqldb
```

(BSD-variant users can use a similar `pw useradd hsqldb...` command).

2. Become the `HSQLDB_OWNER`. Copy the sample file `sample/server.properties` to the `HSQLDB_OWNER`'s home directory and rename it to `server.properties`. (As a final reminder, "sampleserver.properties" is a relative path, so it is understood to be relative to your `HSQLDB_HOME`).

```
# Hsqldb Server cfg file.
# See the HyperSQL Network Listeners chapter of the HyperSQL User Guide.

# Each server.database.X setting defines a database "catalog".
# I.e., an independent set of data.
# Each server.database.X setting corresponds exactly to the jdbc:hsqldb:*
# JDBC URL you would use if you wanted to get a direct (In-Process)
# Connection to the catalog instead of "serving" it.

server.database.0=file:db0/db0
# I suggest that, for every file: catalog you define, you add the
# connection property "ifexists=true" after the database instance
# is created (which happens simply by starting the Server one time).
# Just append ";ifexists=true" to the file: URL, like so:
# server.database.0=file:db0/db0;ifexists=true

# server.dbname.0 defaults to "" (i.e. server.dbname.n for n=0), but
# the catalog definition n will be entirely ignored for n > 0 if you do not
# set server.dbname.n. I.e. dbname setting is required for n > 0, though it
# may be set to blank (e.g. "server.dbname.3=")
```

Since the value of the first database (`server.database.0`) begins with *file:*, the catalog will be persisted to a set of files in the specified directory with names beginning with the specified name. Set the path to whatever you want (relative paths will be relative to the directory containing the properties file). You can read about how to specify other catalogs of various types, and how to make settings for the listen port and many other things in other chapters of this guide.

3. Set and export the environmental variable `CLASSPATH` to the value of `HSQLDB_HOME` (as described above) plus `"/lib/hsqldb.jar"`, like

```
export CLASSPATH; CLASSPATH=/path/to/hsqldb/lib/hsqldb.jar
```

In `HSQLDB_OWNER`'s home directory, run

```
nohup java org.hsqldb.server.Server &
```

This will start the Listener process in the background, and will create your new database catalog "db0". Continue on when you see the message containing `HSQLDB server... is online`. `nohup` just makes sure that the command will not quit when you exit the current shell (omit it if that's what you want to do).

Accessing your Database

We're going to use `SqlTool` to access the database, so you will need the file `sqltool.jar` in addition to `hsqldb.jar`. If `sqltool.jar` isn't already sitting there beside `hsqldb.jar` (they both come pre-built), build it exactly as you would build `hsqldb.jar`, except use `ant target sqltool`. If your distribution came with a `sqltool.jar` file with a version label, like `sqltool-1.2.3.4.jar`, that's fine-- use that file whenever I say `sqltool.jar` below.

Copy the file `sample/sqltool.rc` to the `HSQldb_OWNER`'s home directory. Use `chmod` to make the file readable and writable only to `HSQldb_OWNER`.

```
# $Id: sqltool.rc 5288 2013-09-29 18:35:42Z unsaved $

# This is a sample RC configuration file used by SqlTool, DatabaseManager,
# and any other program that uses the org.hsqldb.lib.RCData class.
# See the documentation for SqlTool for various ways to use this file.

# If you have the least concerns about security, then secure access to
# your RC file.

# You can run SqlTool right now by copying this file to your home directory
# and running
#   java -jar /path/to/sqltool.jar mem
# This will access the first urlid definition below in order to use a
# personal Memory-Only database.
# "url" values may, of course, contain JDBC connection properties, delimited
# with semicolons.
# As of revision 3347 of SqlFile, you can also connect to datasources defined
# here from within an SqlTool session/file with the command "\j urlid".

# You can use Java system property values in this file like this: ${user.home}

# The only feature added recently is the optional "transiso" setting,
# which may be set to an all-caps transaction isolation level as listed
# in the Java API Spec for java.sql.Connection.
# Windows users are advised to use forward slashes instead of reverse slashes,
# and to avoid paths containing spaces or other funny characters. (This
# recommendation applies to any Java app, not just SqlTool).

# A personal Memory-Only (non-persistent) database.
urlid mem
url jdbc:hsqldb:mem:memdbid
username SA
password

# A personal, local, persistent database.
urlid personal
url jdbc:hsqldb:file:${user.home}/db/personal;shutdown=true
username SA
password
transiso TRANSACTION_READ_COMMITTED
# When connecting directly to a file database like this, you should
# use the shutdown connection property like this to shut down the DB
# properly when you exit the JVM.

# This is for a hsqldb Server running with default settings on your local
# computer (and for which you have not changed the password for "SA").
urlid localhost-sa
url jdbc:hsqldb:hsqldb://localhost
username SA
password

# Template for a urlid for an Oracle database.
# You will need to put the oracle.jdbc.OracleDriver class into your
# classpath.
# In the great majority of cases, you want to use the desired version of a
# file odbc*.jar (previously JDBC distributed as classes12.zip),
# which you can get from the directory $ORACLE_HOME/jdbc/lib of any
# Oracle installation compatible with your server.
# Since you need to add to the classpath, you can't invoke SqlTool with
# the jar switch, like "java -jar ../sqltool.jar...".
# Put both the SqlTool jar and odbc*.jar in your classpath (and export!)
# and run something like "java org.hsqldb.util.SqlTool...".
```

```
# You could use the thick driver instead of the thin, but I know of no reason
# why any Java app should.

#urlid cardiff2
#url jdbc:oracle:thin:@aegir.admc.com:1521:TRAFFIC_SID
# Thin SID URLs must specify both port and SID, there are no defaults.
# Oracle listens to 1521 by default, so that's what you will usually specify.
# But can alternatively use global service name (not tnsnames.ora service
# alias, in which case the port does default to 1521):
#url jdbc:oracle:thin:@centos.admc.com/tstsid.admc
#username blaine
#password secretpassword
#driver oracle.jdbc.OracleDriver

# Template for a TLS-encrypted HSQLDB Server.
# Remember that the hostname in hsqldb (and https) JDBC URLs must match the
# CN of the server certificate (the port and instance alias that follows
# are not part of the certificate at all).
# You only need to set "truststore" if the server cert is not approved by
# your system default truststore (which a commercial certificate probably
# would be).

#urlid tls
#url jdbc:hsqldb:hsqldb://db.admc.com:9001/lm2
#username BLAINE
#password asecre
#truststore ${user.home}/ca/db/db-trust.store

# Template for a Postgresql database
#urlid blainedb
#url jdbc:postgresql://idun.africawork.org/blainedb
#username blaine
#password losung1
#driver org.postgresql.Driver

# Template for a MySQL database.  MySQL has poor JDBC support.
#urlid mysql-testdb
#url jdbc:mysql://hostname:3306/dbname
#username root
#password hiddenpwd
#driver com.mysql.jdbc.Driver

# Note that "databases" in SQL Server and Sybase are traditionally used for
# the same purpose as "schemas" with more SQL-compliant databases.

# Template for a Microsoft SQL Server database using Microsoft's Driver
# (I find that the JTDS driver is much more responsive than Microsoft's).
# Port defaults to 1433.
# MSDN implies instances are port-specific, so can specify port or instname.
#urlid msprojsvr
# url/driver for Current 2011 JDBC Driver for Microsoft SQL Server:
# Requires just the new sqljdbc4.jar.  (Microsoft just loves back-slashes)
#url jdbc:sqlserver://hostname\instname;databaseName=dbname
# OR
#url jdbc:sqlserver://hostname;instanceName=instname;databaseName=dbname
#driver com.microsoft.jdbc.sqlserver.SQLServerDriver
# url/deriver for OLDER JDBC Driver:
#url jdbc:microsoft:sqlserver://hostname;DatabaseName=DbName;SelectMethod=Cursor
# The SelectMethod setting is required to do more than one thing on a JDBC
# session (I guess Microsoft thought nobody would really use Java for
# anything other than a "hello world" program).
# This is for Microsoft's SQL Server 2000 driver (requires mssqlserver.jar
# and msutil.jar).
#driver com.microsoft.jdbc.sqlserver.SQLServerDriver
```

```
#username myuser
#password hiddenpwd

# Template for Microsoft SQL Server database using the JTDS Driver
# http://jtds.sourceforge.net Jar file has name like "jtds-1.2.5.jar".
# Port defaults to 1433.
# MSDN implies instances are port-specific, so can specify port or instname.
#urlid nlyte
#username myuser
#password hiddenpwd
#url jdbc:jtds:sqlserver://myhost/nlyte;instance=MSSQLSERVER
# Where database is 'nlyte' and instance is 'MSSQLSERVER'.
# N.b. this is diff. from MS tools and JDBC driver where (depending on which
# document you read), instance or database X are specified like HOSTNAME\X.
#driver net.sourceforge.jtds.jdbc.Driver

# Template for a Sybase database
#urlid sybase
#url jdbc:sybase:Tds:hostname:4100/dbname
#username blaine
#password hiddenpwd
# This is for the jConnect driver (requires jconn3.jar).
#driver com.sybase.jdbc3.jdbc.SybDriver

# Template for Embedded Derby / Java DB.
#urlid derby1
#url jdbc:derby:path/to/derby/directory;create=true
#username ${user.name}
#password any_noauthbydefault
#driver org.apache.derby.jdbc.EmbeddedDriver
# The embedded Derby driver requires derby.jar.
# There's also the org.apache.derby.jdbc.ClientDriver driver with URL
# like jdbc:derby://<server>[:<port>]/databaseName, which requires
# derbyclient.jar.
# You can use \= to commit, since the Derby team decided (why???)
# not to implement the SQL standard statement "commit"!!
# Note that SqlTool can not shut down an embedded Derby database properly,
# since that requires an additional SQL connection just for that purpose.
# However, I've never lost data by not shutting it down properly.
# Other than not supporting this quirk of Derby, SqlTool is miles ahead of ij.
```

We will be using the "localhost-sa" sample urlid definition from the config file. The JDBC URL for this urlid is `jdbc:hsqldb:hsqldb://localhost`. That is the URL for the default catalog of a HyperSQL Listener running on the default port of the local host. You can read about URLs to connect to other catalogs with and without listeners in other chapters of this guide.

Run SqlTool.

```
java -jar path/to/sqltool.jar localhost-sa
```

If you get a prompt, then all is well. If security is of any concern to you at all, then you should change the privileged password in the database. Use the command `SET PASSWORD` command to change SA's password.

```
SET PASSWORD 'newpassword';
```

Set a *strong* password!



Note

If, like most UNIX System Administrators, you often need to make up strong passwords, I highly suggest the great little program `pwgen` [<https://sourceforge.net/projects/pwgen/>]. You can probably get it where you get your other OS packages. The command `pwgen -1` is usually all you need.

Note that with SQL-conformant databases like HyperSQL 2.0, user names and passwords are case sensitive. If you don't quote the name, it will be interpreted as upper-case, like any named SQL object. (Only for backwards compatibility, we do make an exception for the special user name SA, but you should always use upper-case "SA" nevertheless).

When you're finished playing, exit with the command `\q`.

If you changed the SA password, then you need to update the password in the `sqltool.rc` file accordingly.

You can, of course, also access the database with any JDBC client program. You will need to modify your classpath to include `hsqldb.jar` as well as your client class(es). You can also use the other HSQLDB client programs, such as `org.hsqldb.util.DatabasesManagerSwing`, a graphical client with a similar purpose to `SqlTool`.

You can use any normal UNIX account to run the JDBC clients, including `SqlTool`, as long as the account has read access to the `sqltool.jar` file and to an `sqltool.rc` file. See the Utilities Guide about where to put `sqltool.rc`, how to execute sql files, and other `SqlTool` features.

Create additional Accounts

Connect to the database as SA (or any other Administrative user) and run `CREATE USER` to create new accounts for your catalog. HSQLDB accounts are database-catalog-specific, not `Listener`-specific.

In SQL-compliant databases, all database objects are created in a *schema*. If you don't specify a schema, then the new object will be created in the default schema. To create a database object, your account (the account that you connected with) must have the role DBA, or your account must have authorization for the target schema (see the `CREATE SCHEMA` command about this last). When you first create a HyperSQL catalog, it has only one database user-- SA, a DBA account, with an empty string password. You should set a password (as described above). You can create as many additional users as you wish. To make a user a DBA, you can use the "ADMIN" option to the `CREATE USER` command, command, or `GRANT` the DBA Role to the account after creating it.

Once an object is created, the object creator and users with the DBA role will have all privileges to work with that object. Other users will have only the rights which the pseudo-user PUBLIC has. To give specific users more permissions, even rights to read objects, you can `GRANT` permissions for specific objects, grant Roles (which encompass a set of permissions), or grant the DBA Role itself.

Since only people with a database account may do anything at all with the database, it is often useful to permit other database users to view the data in your tables. To optimize performance, reduce contention, and minimize administration, it is often best to grant `SELECT` to PUBLIC on table-like objects that need to be accessed by multiple database users, with the significant exception of any data which you want to keep secret. (Similarly with `EXECUTE` priv for routines and `USAGE` priv for other object types). Note that this is not at all equivalent to giving the world or the Internet read access to your tables-- you are giving read access to people that have been given accounts for the target database catalog.

Shutdown

Do a clean database shutdown when you are finished with the database catalog. You need to connect up as SA or some other Admin user, of course. With `SqlTool`, you can run

```
java -jar path/to/sqltool.jar --sql 'shutdown;' localhost-sa
```

You don't have to worry about stopping the `Listener` because it shuts down automatically when all served database catalogs are shut down.

Running Hsqldb as a System Daemon

You can, of course, run HSQLDB through `inittab` on System V UNIXes, but usually an init script is more convenient and manageable. This section explains how to set up and use our UNIX init script. Our init script is only for use by root. (That is not to say that the *Listener* will run as root-- it usually should not).

The main purpose of the init script is to start up a Listener for the database catalogs specified in your `server.properties` file; and to gracefully shut down these same catalogs. For each catalog defined by a `server.database.X` setting in your `.properties` file, you must define an administrative "urlid" in your `sqltool.rc` (these are used to access the catalogs for validation and shutdown purposes). Finally, you list the urlid names in your init script config file. If, due to firewall issues, you want to run a WebServer instead of a Server, then make sure you have a healthy WebServer with a `webserver.properties` set up, adjust your URLs in `sqltool.rc`, and set `TARGET_CLASS` in the config file.

By following the commented examples in the config file, you can start up any number of Server and/or WebServer listener instances with or without TLS encryption, and each listener instance can serve any number of HyperSQL catalogs (independent data sets), all with optimal efficiency from a single JVM process. There are instructions in the init script itself about how to run multiple, independently-configured JVM processes. Most UNIX installations, however, will run a single JVM with a single Listener instance which serves multiple catalogs, for easier management and more efficient resource usage.

After you have the init script set up, root can use it anytime to start or stop HSQLDB. (I.e., not just at system bootup or shutdown).

Portability of hsqldb init script

The primary design criterion of the init script is portability. It does not print pretty color startup/shutdown messages as is common in late-model Linuxes and HPUX; and it does not keep subsystem state files or use the startup/shutdown functions supplied by many UNIXes, because these features are all non-portable.

Offsetting these limitations, this one script does its intended job great on the UNIX varieties I have tested, and can easily be modified to accommodate other UNIXes. While you don't have tight integration with OS-specific daemon administration guis, etc., you do have a well tested and well behaved script that gives good, utilitarian feedback.

Init script Setup Procedure

The strategy taken here is to get the init script to run your single Server or WebServer first (as specified by `TARGET_CLASS`). After that's working, you can customize the JVM that is run by running additional Listener instances in it, running your own application in it (embedding), or even overriding HSQLDB behavior with your own overriding classes.

1. Copy the init script `sample/hsqldb.init` to `hsqldb` in the directory where init scripts live on your variety of UNIX. The most common locations are `/etc/init.d` or `/etc/rc.d/init.d` on System V style UNIXes, `/usr/local/etc/rc.d` on BSD style UNIXes, and `/Library/StartupItems/hsqldb` on OS X (you'll need to create the directory for the last).
2. View your `server.properties` file. Make a note of every catalog define by a `server.database.X` setting. A couple steps down, you will need to set up administrative access for each of these catalogs. If you are using our sample `server.properties` file, you will just need to set up access for the catalog specified with `file:db0/dbo`.



Note

Pre-2.0 versions of the `hsqldb` init script required use of `.properties` settings of the form `server.urlid.X`. These settings are obsolete and should be removed.

3. Either copy `HSQLDB_OWNER`'s `sqltool.rc` file into root's home directory, or set the value of `AUTH_FILE` to the absolute path of `HSQLDB_OWNER`'s `sqltool.rc` file. This file is read directly by root, even if you run `hsqldb` as non-root (by setting `HSQLDB_OWNER` in the config file). If you copy the file, make sure to use `chmod`

to restrict permissions on the new copy. The init script will abort with an appropriate exhortation if you have the permissions set incorrectly.

You need to set up a urlid stanza in your `sqltool.rc` file for network access (i.e. JDBC URL with `hsqldb`, `hsqldb`, `http`, or `https`;) for each catalog in your `server.properties` file. For our example, you need to define a stanza for the `file:db0/db0` catalog. You must supply for this catalog, a `hsqldb` JDBC URL, an administrative user name, and the password.

Example 15.1. example `sqltool.rc` stanza

```
urlid localhostdb1
url jdbc:hsqldb:hsqldb://localhost
username SA
password secret
```

4. Look at the comment towards the top of the init script which lists recommended locations for the configuration file for various UNIX platforms. Copy the sample config file `sample/hsqldb.cfg` to one of the listed locations (your choice). Edit the config file according to the instructions in it. For our example, you will set the value of `URLIDS` to `localhostdb1`, since that is the urlid name that we used in the `sqltool.rc` file.

```
# $Id: hsqldb.cfg 3583 2010-05-16 01:49:52Z unsaved $

# Sample configuration file for HyperSQL Server Listener.
# See the "HyperSQL on UNIX" chapter of the HyperSQL User Guide.

# N.b.!!!! You must place this in the right location for your type of UNIX.
# See the init script "hsqldb" to see where this must be placed and
# what it should be renamed to.

# This file is "sourced" by a Bourne shell, so use Bourne shell syntax.

# This file WILL NOT WORK until you set (at least) the non-commented
# variables to the appropriate values for your system.
# Life will be easier if you avoid all filepaths with spaces or any other
# funny characters. Don't ask for support if you ignore this advice.

# The URLIDS setting below is new and REQUIRED. This setting replaces the
# server.urlid.X settings which used to be needed in your Server's
# properties file.

# -- Blaine (blaine dot simpson at admc dot com)

JAVA_EXECUTABLE=/usr/bin/java

# Unless you copied the jar files from another system, this typically
# resides at $HSQLDB_HOME/lib/sqltool.jar, where $HSQLDB_HOME is your HSQLDB
# software base directory.
# The file name may actually have a version label in it, like
# sqltool-1.2.3.jar (in which case, you must specify the full name here).
# A 'hsqldb.jar' file (with or without version label) must reside in the same
# directory as the specified sqltool.jar file.
SQLTOOL_JAR_PATH=/opt/hsqldb-2.0.0/hsqldb/lib/sqltool.jar
# For the sample value above, there must also exist a file
# /opt/hsqldb-2.0.0/hsqldb/lib/hsqldb*.jar.

# Where the file "server.properties" or "webserver.properties" resides.
SERVER_HOME=/opt/hsqldb-2.0.0/hsqldb/data

# What UNIX user the server will run as.
# (The shutdown client is always run as root or the invoker of the init script).
# Runs as root by default, but you should take the time to set database file
# ownerships to another user and set that user name here.
HSQLDB_OWNER=hsqldb
```

```
# The HSQLDB jar file specified in HSQLDB_JAR_PATH above will automatically
# be in the class path. This arg specifies additional classpath elements.
# To embed your own application, add your jar file(s) or class base
# directories here, and add your main class to the INVOC_ADDL_ARGS setting
# below. Another common use-case for adding to your class path is to make
# classes available to the DB engines for SQL/JRT functions and procedures.
#SERVER_ADDL_CLASSPATH=/usr/local/dist/currencybank.jar

# For startup or shutdown failures, you can save a lot of debugging time by
# temporarily adjusting down MAX_START_SECS and MAX_TERMINATE_SECS to a
# little over what it should take for successful startup and shutdown on
# your system.

# We require all Server/WebServer instances to be accessible within
# $MAX_START_SECS from when the Server/WebServer is started.
# Defaults to 60.
# Raise this is you are running lots of DB instances or have a slow server.
#MAX_START_SECS=200

# Max time to allow for JVM to die after all HSQLDB instances stopped.
# Defaults to 60. Set high because the script will always continue as soon as
# the process has stopped. The importance of this setting is, how long until
# a non-stopping-JVM-problem will be detected.
#MAX_TERMINATE_SECS=0

# NEW AND IMPORTANT!!!
# As noted at the top of this file, this setting replaces the old property
# settings server.urlid.X.
# Simply list the URLIDS for all DB instances which your *Server starts.
# Usually, these will exactly mirror the server.database.X settings in your
# server.properties or webserver.properties file.
# Each urlid listed here must be defined to a NETWORK url with Admin privileges
# in the AUTH_FILE specified below. (Network type because we use this for
# inter-process communication)
# Separate multiple values with white space. NO OTHER SPECIAL CHARACTERS!
# Make sure to quote the entire value if it contains white space separator(s).
URLIDS='localhostdb1'

# These are urlids # ** IN ADDITION TO URLIDS **, for instances which the init
# script should stop but not start.
# Most users will not need this setting. If you need it, you'll know it.
# Defaults to none (i.e., only URLIDS will be stopped).
#SHUTDOWN_URLIDS='ondemand'

# SqlTool authentication file used only for shutdown.
# The default value will be sqltool.rc in root's home directory, since it is
# root who runs the init script.
# (See the SqlTool chapter of the HyperSQL Utilities Guide if you don't
# understand this).
#AUTH_FILE=/home/blaine/sqltool.rc

# Typical users will leave this unset and it will default to
# org.hsqldb.server.Server. If you need to run the HSQLDB WebServer class
# instead, due to a firewall or routing impediment, set this to
# org.hsqldb.server.WebServer, see the docs about running WebServr, and
# set up a "webserver.properties" file instead of a "server.properties".
# The JVM that is started can invoke many classes (see the following item
# about that), but this is the server that is used (1) to check status,
# (2) to shut down the JVM.
#TARGET_CLASS=org.hsqldb.server.WebServer

# This is where you may specify both command-line parameters to TARGET_CLASS,
# plus any number of additional programs to run (along with their command-line
# parameters). The MainInvoker program is used to embed these multiple
# static main invocations into a single JVM, so see the API spec for
# org.hsqldb.util.MainInvoker if you want to learn more.
# N.b. You should only use this setting to set HSQLDB Server or WebServer
```

```

# parameters if you run multiple instances of this class, since you can use the
# server/webserver.properties file for a single instance.
# Every additional class (in addition to the TARGET_CLASS)
# must be preceded with an empty string, so that MainInvoker will know
# you are giving a class name. MainInvoker will invoke the normal
# static main(String[]) method of each such class.
# By default, MainInvoker will just run TARGET_CLASS with no args.
# Example that runs just the TARGET_CLASS with the specified arguments:
#INVOC_ADDL_ARGS='-silent false' #but use server.properties property instead!
# Example that runs the TARGET_CLASS plus a WebServer:
#INVOC_ADDL_ARGS='"" org.hsqldb.server.WebServer'
# Note the empty string preceding the class name.
# Example that starts TARGET_CLASS with an argument + a WebServer +
# your own application with its args (i.e., the HSQLDB Servers are
# "embedded" in your application). (Set SERVER_ADDL_CLASSPATH too).:
#INVOC_ADDL_ARGS='-silent false "" org.hsqldb.server.WebServer "" com.acme.Stone --env prod
localhost'
# but use server.properties for -silent option instead!
# Example to run a non-TLS server in same JVM with a TLS server. In this
# case, TARGET_CLASS is Server which will run both in TLS mode by virtue of
# setting the tls, keyStore, and keyStorePassword settings in
# server*.properties, as described below; plus an "additional" Server with
# overridden 'tls' and 'port' settings:
#INVOC_ADDL_ARGS=''' org.hsqldb.server.Server --port 9002 --tls false"
# This is an important use case. If you run more than one Server instance,
# you can specify different parameters for each here, even though only one
# server.properties file is supported.
# Note that you use nested quotes to group arguments and to specify the
# empty-string delimiter.

# The TLS_* settings have been obsoleted.
# To get your server running with TLS, set
# system.javax.net.ssl.keyStore=/path/to/your/private.keystore
# system.javax.net.ssl.keyStorePassword=secretPassword
# server.ssl=true
# IN server.properties or webserver.properties, and
# MAKE THE FILE OWNER-READ-ONLY!
# See the TLS Encryption section of the HyperSQL User Guide, paying attention
# to the security warning(s).
# If you are running with a private server cert, then you will also need to
# set "truststore" in the your SqlTool config file (location is set by the
# AUTH_FILE variable in this file, or it must be at the default location for
# HSQLDB_OWNER).

# Any JVM args for the invocation of the JDBC client used to verify DB
# instances and to shut them down (SqlToolSprayer).
# Server-side System Properties should normally be set with system.*
# settings in the server/webserver.properties file.
# This example specifies the location of a private trust store for TLS
# encryption.
# For multiple args, put quotes around entire value.
# If you are starting just a TLS_encrypted Listener, you need to uncomment
# this so the init scripts uses TLS to connect.
# If using a private keystore, you also need to set "truststore" settings in
# the sqltool.rc file.
#CLIENT_JVMARGS=-Djavax.net.debug=ssl
# This sample value displays useful debugging information about TLS/SSL.

# Any JVM args for the server.
# For multiple args, put quotes around entire value.
#SERVER_JVMARGS=-Xmx512m
# You can set the "javax.net.debug" property on the server side here, in the
# same exact way as shown for the client side above.

```

Verify that the init script works.

Just run

```
/path/to/hsqldb
```

as root to see the arguments you may use. Notice that you can run

```
/path/to/hsqldb status
```

at any time to see whether your HSQLDB Listener is running.

Re-run the script with each of the possible arguments to really test it good. If anything doesn't work right, then see the [Troubleshooting the Init Script](#) section.

5. Tell your OS to run the init script upon system startup and shutdown. If you are using a UNIX variant that has `/etc/rc.conf` or `/etc/rc.conf.local` (like BSD variants and Gentoo), you must set "hsqldb_enable" to "YES" in either of those files. (Just run `cd /etc; ls rc.conf rc.conf.local` to see if you have one of these files). For good UNIXes that use System V style init, you must set up hard links or soft links either manually or with management tools (such as `chkconfig` or `insserv`) or Gui's (like run level editors).

This paragraph is for Mac OS X users only. If you followed the instructions above, your init script should reside at `/Library/StartupItems/hsqldb/hsqldb`. Now copy the file `StartupParameters.plist` from the directory `src/org.hsqldb/sample` of your HSQLDB distribution to the same directory as the init script. As long as these two files reside in `/Library/StartupItems/hsqldb`, your init script is active (for portability reasons, it doesn't check for a setting in `/etc/hostconfig`). You can run it as a *Startup Item* by running

```
SystemStarter {start|stop|restart} Hsqldb
```

Hsqldb is the service name. See the man page for `SystemStarter`. To disable the init script, wipe out the `/Library/StartupItems/hsqldb` directory. Hard to believe, but the Mac people tell me that during system shutdown the Startup Items don't run at all. Therefore, if you don't want your data corrupted, make sure to run "SystemStarter stop Hsqldb" before shutting down your Mac.

Follow the examples in the config file to add additional classes to the server JVM's classpath and to execute additional classes in your JVM. (See the `SERVER_ADDL_CLASSPATH` and `INVOC_ADDL_ARGS` items).

Troubleshooting the Init Script

Definitely look at the init script log file, which is at an OS-sepended location, but is usually at `/var/log/hsqldb.log`.

Do a `ps` to look for processes containing the string `hsqldb`, and try to connect to the database from any client. If the init script starts up your database successfully, but incorrectly reports that it has not, then your problem is with specification of `urlid(s)` or `SqlTool` setup. If your database really did not start, then skip to the next paragraph. Verify that your config file assigns a `urlid` for each catalog defined in `server.properties` or `webserver.properties`, then verify that you can run `SqlTool` as root to connect to the catalogs with these `urlids`. (For the latter test, use the `--rcfile` switch if you are setting `AUTH_FILE` in the init script config file).

If your database really is not starting, then verify that you can `su` to the database owner account and start the database. The command `su USERNAME -c ...` won't work on most UNIXes unless the target user has a real login shell. Therefore, if you try to tighten up security by disabling this user's login shell, you will break the init script. If these possibilities don't pan out, then debug the init script or seek help, as described below.

To debug the init script, run it in verbose mode to see exactly what is happening (and perhaps manually run the steps that are suspect). To run an init script (in fact, any sh shell script) in verbose mode, use `sh` with the `-x` or `-v` switch, like

```
sh -x path/to/hsqldb start
```

See the man page for `sh` if you don't know the difference between `-v` and `-x`.

If you want troubleshooting help, use the HSQLDB lists/forums. Make sure to include the revision number from your `hsqldb` init script (it's towards the top in the line that starts like `"# $Id:"`), and the output of a run of

```
sh -x path/to/hsqldb start > /tmp/hstart.log 2>&1
```

Upgrading

This section is for users who are using our UNIX init script, and who are upgrading their HyperSQL installation.

Most users will not have customized the init script itself, and your customizations will all be encapsulated in the init script configuration file. These users should just overwrite their init script with a new one from the HyperSQL installation, and manually merge config file settings. First, just copy the file `/sample/hsqldb.init` over top of your init script (wherever it runs from). Then update your old config file according to the instructions in the new config file template at `sample/hsqldb.cfg`. You will have to change very few settings. If you are upgrading from a pre-2.0 installation to a post-2.0 installation, you will need to (1) add the setting `URLIDS`, as described above and in the inline comments, and (2) replace variable `HSQLDB_JAR_PATH` with `SQLTOOL_JAR_PATH` which (if you haven't guessed) should be set to the path to your `sqltool.jar` file.

Users who customized their init script will need to merge their customizations into the new init script.

Chapter 16. Deployment Guide

Fred Toussi, The HSQL Development Group

\$Revision: 5581 \$

Copyright 2002-2016 Fred Toussi. Permission is granted to distribute this document without any alteration under the terms of the HSQLDB license. Additional permission is granted to the HSQL Development Group to distribute this document with or without alterations under the terms of the HSQLDB license.

2016-05-15 15:57:21-0400

Memory and Disk Use

Memory used by the program can be thought of as two distinct pools: memory used for table data which is not released unless the data is deleted and memory that can be released or is released automatically, including memory used for caching, building result sets and other internal operations such as storing the information needed for a rollback a transaction.

Most JVM implementations allocate up to a maximum amount of memory (usually 64 MB by default). This amount is generally not adequate when large memory tables are used, or when the average size of rows in cached tables is larger than a few hundred bytes. The maximum amount of allocated memory can be set on the Java command line that is used for running HyperSQL. For example, with Sun JVM, parameter `-Xmx256m` increases the amount to 256 MB.

Table Memory Allocation

The memory used for a MEMORY table is the sum of memory used by each row. Each MEMORY table row is a Java object that has 2 int or reference variables. It contains an array of objects for the fields in the row. Each field is an object such as `Integer`, `Long`, `String`, etc. In addition each index on the table adds a node object to the row. Each node object has 6 int or reference variables. As a result, a table with just one column of type `INTEGER` will have four objects per row, with a total of 10 variables of 4 bytes each - currently taking up 80 bytes per row. Beyond this, each extra column in the table adds at least a few bytes to the size of each row.

Result Set Memory Allocation

By default, all the rows in the result set are built in memory, so very large result sets may not be possible to build. A server mode database releases the result set from the server memory once the database server has returned the result set. An *in-process* database releases the memory when the application program closes the `java.sql.ResultSet` object. A server mode database requires additional memory for returning result sets, as it converts the full result set into an array of bytes which is then transmitted to the client.

HyperSQL 2.0 supports disk-based result sets. The commands, `SET SESSION RESULT MEMORY ROWS <integer>` and `SET DATABASE DEFAULT RESULT MEMORY ROWS <integer>` specify a threshold for the number of rows. Results with row counts above the threshold are stored on disk. These settings also apply to temporary tables, views and subquery tables.

Disk-based result sets slow down the database operations and should be used only when absolutely necessary, perhaps with result sets that are larger than tens of thousands of rows.

In a server mode database, when the `setFetchSize()` method of the `Statement` interface is used to limit the number rows fetched, the whole result is held by the engine and is returned to the `JDBC ResultSet` in blocks of rows of the specified fetch size.

Temporary Memory Use During Operations

When UPDATE and DELETE queries are performed on CACHED tables, the full set of rows that are affected, including those affected due to ON UPDATE actions, is held in memory for the duration of the operation. This means it may not be possible to perform deletes or updates involving very large numbers of rows of CACHED tables. Such operations should be performed in smaller sets. This memory is released as soon as the DELETE or UPDATE is performed.

When transactions support is enabled with SET AUTOCOMMIT FALSE, lists of all insert, delete or update operations are stored in memory so that they can be undone when ROLLBACK is issued. For CACHED tables, only the transaction information is held in memory, not the actual rows that have changed. Transactions that span thousands of modification to data will take up a lot of memory until the next COMMIT or ROLLBACK clears the list. Each row modification uses less than 100 bytes until COMMIT.

When subqueries or views are used in SELECT and other statements, transient tables are created and populated by the engine. If the SET SESSION RESULT MEMORY ROWS <integer> statement has been used, these transient tables are stored on disk when they are larger than the threshold.

Data Cache Memory Allocation

With CACHED tables, the data is stored on disk and only up to a maximum number of rows are held in memory at any time. The default is up to 50,000 rows. The SET FILES CACHE ROWS command or the hsqldb.cache_rows connection property can be set to alter this amount. As any random subset of the rows in any of the CACHED tables can be held in the cache, the amount of memory needed by cached rows can reach the sum of the rows containing the largest field data. For example if a table with 100,000 rows contains 40,000 rows with 1,000 bytes of data in each row and 60,000 rows with 100 bytes in each, the cache can grow to contain 50,000 of the smaller rows, but as explained further, only 10,000 of the large rows.

An additional property, hsqldb.cache_size is used in conjunction with the hsqldb.cache_rows property. This puts a limit in bytes on the total size of rows that are cached. The default value is 10,000KB. (This is the size of binary images of the rows and indexes. It translates to more actual memory, typically 2-4 times, used for the cache because the data is represented by Java objects.)

If memory is limited, the hsqldb.cache_rows or hsqldb.cache_size database properties can be reduced. In the example above, if the hsqldb.cache_size is reduced from 10,000 to 5,000, it will allow the number of cached rows to reach 50,000 small rows, but only 5,000 of the larger rows.

Data for CLOB and BLOB columns is not cached and does not affect the CACHED table memory cache.

The use of Java NIO file access method also increases memory usage. Access with NIO improves database update speed and is used by default for data files up to 256 MB. For minimal memory use, nio access should be disabled.

The operating system usually allocates a large amount of buffer memory for speed up file read operations. Therefore when a lot of memory is available to the operating system, all database operations perform faster.

Object Pool Memory Allocation

HyperSQL uses a set of fast pools for immutable objects such as Integer, Long and short String objects that are stored in the database. In most circumstances, this reduces the memory footprint still further as fewer copies of the most frequently-used objects are kept in memory. The object pools are shared among all databases in the JVM. The size of each pool can be modified only by altering and recompiling the org.hsqldb.store.ValuePool class.

Lob Memory Usage

Access to lobes is always performed in chunks, so it is perfectly possible to store and access a CLOB or BLOB that is larger than the JVM memory allocation. The actual total size of lobes is almost unlimited. We have tested with over 100 GB of lobes without any loss of performance.

By default, HyperSQL 2 uses memory-based tables for the lob schema (not the actual lob data). Therefore it is practical to store about 100,000 individual lobes in the database with the default JVM memory allocation. More lobes can be stored with larger JVM memory allocations. In order to store more than a few hundreds of thousands of lobes, you can change the lob schema storage to CACHED tables with the following statements:

Example 16.1. Using CACHED tables for the LOB schema

```
SET TABLE SYSTEM_LOBS.BLOCKS TYPE CACHED
SET TABLE SYSTEM_LOBS.LOBS TYPE CACHED
SET TABLE SYSTEM_LOBS.LOB_IDS TYPE CACHED
```

Disk Space

With file: database, the engine uses the disk for storage of data and any change. For safety, the engine backs up the data internally during operation. Spare space, at least equal to the size of the .data and .script file is needed. The .lobs file is not backed up during operation as it is not necessary for safety.

Managing Database Connections

In all running modes (server or *in-process*) multiple connections to the database engine are supported. *in-process* (standalone) mode supports connections from the client in the same Java Virtual Machine, while server modes support connections over the network from several different clients.

Connection pooling software can be used to connect to the database but it is not generally necessary. Connection pools may be used for the following reasons.

- To allow new queries to be performed while a time-consuming query is being performed in the background. In HyperSQL, blocking depends on the transaction control model, the isolation level, and the current activity by other sessions.
- To limit the maximum number of simultaneous connections to the database for performance reasons. With HSQLDB this can be useful if your application is designed in a way that opens and closes connections for each small task. Also, the overall performance may be higher when fewer simultaneous connections are used. If you want to reduce the number of simultaneous sessions, you can use a connection pool with fewer pooled connections.

An application that is not both multi-threaded and transactional, such as an application for recording user login and logout actions, does not need more than one connection. The connection can stay open indefinitely and reopened only when it is dropped due to network problems.

When using an *in-process* database, when the last connection to the database is closed, the database still remains open, waiting for the next connection to be made. From version 2.2.9, each time the last connection is closed all the data changes are logged and synched to disk.

An explicit SHUTDOWN command, with or without an argument, is required to close the database. A connection property, shutdown=true, can be used on the connection URL or in a properties object to shutdown the database when the last connection is closed.

When using a server database (and to some extent, an *in-process* database), care must be taken to avoid creating and dropping JDBC Connections too frequently. Failure to observe this will result in poor performance when the application is under heavy load.

A common error made by users in load-test simulations is to use a single client machine to open and close thousands of connections to a HyperSQL server instance. The connection attempts will fail after a few thousand because of OS restrictions on opening sockets and the delay that is built into the OS in closing them.

Application Development and Testing

First thing to be aware of is the SQL conformance settings of HyperSQL. By default version 2 applies stricter conformance rules than version 1.8 and catches long strings or decimal values that do not fit within the specified length or precision settings. However, there are several conformance settings that are turned off by default. This is to enable easier migration from earlier versions, and also greater compatibility with databases such as MySQL that are sometimes very liberal with type conversions. The conformance settings are listed in the System Management chapter and their connection property equivalents are listed in the Database Properties chapter. Ideally, all the settings that are not for syntax compatibility with other databases should have a true value for best error checking. You can turn on the settings for syntax compatibility with another database if you are porting or testing applications targeted at the other database.

For application unit testing you can use an all-in-memory, in-process database.

If the tests are all run in one process, then the contents of a *mem:* database survives between tests. To release the contents you can use the SHUTDOWN command (an SQL command). You can even use multiple *mem:* databases in your tests and SHUTDOWN each one separately.

If the tests are in different processes and you want to keep the data between the tests, the best solution is to use a Server instance that has a *mem:* database. After the tests are done, you can SHUTDOWN this database, which will shutdown the server.

The Server has an option that allows databases to be created as needed by making a connection (see the Listeners Chapter). This option is useful for testing, as your server is never shut down when a database is shutdown. Each time you connect to the *mem:* database that is served by the Server, the database is created if it does not exist (i.e. has been previously shut down).

If you do not want to run a Server instance, and you need persistence between tests in different processes, then you should use a *file:* database. From version 2.2.9 when the last existing connection to the database is closed, the latest changes to the database are persisted fully with fsync. The database is still in an open state until it is shut down. You can use the `shutdown=true` connection property to close the database automatically after the connections are closed. The automatic sync and shutdown are mainly for test environment. In production environments you should execute the SHUTDOWN statement before your application is closed. This ensures a quick start next time you connect to the database.

An alternative option is to use `hsqldb.write_delay=false` connection property, but this is slightly slower than the other option and should be used in situations where the test application does not close the connections. This option uses fsync after each commit. Even if the test process is aborted without shutting down the connections, all committed data is saved. It has been reported that some data access frameworks do not close all their connection to the database after the tests. In such situations, you need to use this option if you want the data to persist at the end of the tests

You may actually want to use a *file:* database, or a server instance that serves a *file:* database in preference to a *mem:* database. As HyperSQL logs the DDL and DML statements in the .log file, this file can be used to check what is being sent to the database. Note that UPDATE statements are represented by a DELETE followed by an INSERT statement. Statements are written out when the connection commits. The write delay also has an effect on how soon the statements are written out. By default, the write delay is 0.5 second.

The new SQL logging feature in version 2.2.x and later records all executed statements and can be used for debugging your application.

Some types of tests start with a database that already contains the tables and data, and perform various operations on it during the tests. You can create and populate the initial database then set the property "files_readonly=true" in

the `.properties` file of the database. The tests can then modify the database, but these modifications are not persisted after the tests have completed.

Databases with `"files_readonly=true"` can be placed within the classpath and in a jar file. In this case, the connection URL must use the `res:` protocol, which treats the database as a resource.

Tweaking the Mode of Operation

Different modes of operation and settings are used for different purposes. Some scenarios are discussed below:

Embedded Databases in Desktop Applications

In this usage, the amount of data change is often limited and there is often a requirement to persist the data immediately. The default write delay of 0.5 second is fine for many applications. You can also use the property `hsqldb.write_delay_millis=100` to reduce it to 0.1 second, or the property `hsqldb.write_delay=false` to force a disk fsync after each commit. Before the application is closed, you should perform the SHUTDOWN command to ensure the database is opened instantly when it is next opened. Note you don't need to use SHUTDOWN COMPACT as routine.

Embedded Databases in Server Applications

This usage involves a server application, such as a web application, connecting to an embedded HyperSQL instance. In this usage, the database is often accessed heavily, therefore performance and latency is a consideration. If the database is updated heavily, the default value of the WRITE DELAY property (0.5 sec) is often enough, as it is assumed the server or the application does not go down frequently. If it is necessary, you can reduce the WRITE DELAY to a small value (20 ms) without impacting the update speed. If you reduce WRITE DELAY to zero, performance drops to the speed of disk file sync operation.

Alternatively, a server application can use an all-in-mem database instance for fast access, while sending the data changes to a persistent, disk based instance either periodically or in real time.

Mixed Mode : Embedding a HyperSQL Server (Listener)

Since you won't be able to access *in-process* database instances from other processes, you will often want to run a Listener in your applications that use embedded databases. You can do this by starting up a Server or WebServer instance programmatically, but you could also use the class `org.hsqldb.util.MainInvoker` to start up your application and a HyperSQL Server or WebServer without any programming. `MainInvoker` is a general-purpose utility class to invoke the main methods of multiple classes. Each main class is followed by its arguments (if any), then an empty string to separate it from the next main class.

Example 16.2. MainInvoker Example

```
java -cp path/to/your/app.jar:path/to/hsqldb.jar org.hsqldb.util.MainInvoker com.your.main.App  
" " org.hsqldb.server.Server
```

(Use `;` instead of `:` to delimit classpath elements on Windows). The empty string separates your `com.your.main.App` invocation from the `org.hsqldb.server`.

Specify the same *in-process* JDBC URL to your app and in the `server.properties` file. You can then connect to the database from outside using a JDBC URL like `jdbc:hsqldb:hsq://hostname`, while connecting from inside the application using something like `jdbc:hsqldb:file:<filepath of database>`.

This tactic can be used to run off-the-shelf server applications with an embedded HyperSQL Server, without doing any coding.

`MainInvoker` can be used to run any number of Java class main method invocations in a single JVM. See the API spec for `MainInvoker` for details on its usage.

Using HyperSQL Without Logging Data Change

All file database that are not readonly, write changes to the `.log` file. There are scenarios where writing to the `.log` file can be turned off to improve performance, especially with larger databases. For these applications you can set the property `hsqldb.log_data=false` to disable the recovery log and speed up data change performance. The equivalent SQL command is `SET FILES LOG FALSE`.

With this setting, no data is logged, but all the changes to cached tables are written to the `.data` file. To persist all the data changes up to date, you can use the `CHECKPOINT` command. If you perform `SHUTDOWN`, the data is also persisted correctly. If you do not use `CHECKPOINT` or `SHUTDOWN` when you terminate the application, all the changes are lost and the database reverts to its original state when it is opened without losing any of the original data.

Your server applications can use a database as a temporary disk data cache which is not persisted past the lifetime of the application. For this usage, delete the database files when the application ends.

On some platforms, such as embedded devices which have a reliable storage device, this is also a useful option. Your application issues `CHECKPOINT` to save the changes made so far. This method of use reduces write operations on SSD devices. For this usage, the lock file should also be disabled with the connection property `hsqldb.lock_file=false`.

Bulk Inserts, Updates and Deletes

Bulk inserts, deletes and updates are performed with the best performance with the following method. The database remains safe and consistent using this method. In the event of a machine crash during the operation, the database can be recovered to the point just before the bulk operation.

1. Before the operation, execute the `SET FILES LOG FALSE` statement.
2. Execute the `CHECKPOINT` statement.
3. Perform all the bulk operations, using batched prepared statements. A batch size of 1000 to 10000 is adequate. Perform commit after each batch.
4. After all the bulk operations are complete, execute the `SET FILES LOG TRUE` statement.
5. Finally execute the `CHECKPOINT` statement.
6. If you have performed many thousands of updates or deletes (not just inserts), it is a good idea to execute `CHECKPOINT DEFrag`, instead of `CHECKPOINT` at the end.
7. If things go wrong during the bulk operation, for example when a unique constraint violation aborts the operation, and you want to redo the whole operation, just use `SHUTDOWN IMMEDIATELY` instead of `CHECKPOINT`. When you restart the database it will revert to the state at the first `CHECKPOINT` and the bulk operation can be redone.

Using NIO File Access

This method of file access uses the operating system's memory-mapped file buffer for the `.data` file. For larger databases with `CACHED` tables, use of `nio` improves database access speed significantly. Performance improvements can be tenfold or even higher. By default, `NIO` is used for `.data` files from 16 MB up to 256 MB. You can increase the limit with the `SET FILES NIO SIZE <value>` statement. There should be enough RAM available to accommodate the memory mapped buffers. For vary large `nio` usage, a 64 bit JVM must be used. The memory is not

taken from the JVM memory allocation, therefore there is no need to increase the `-Xmx` parameter of the JVM. If not enough memory is available for the specified value, `nio` is not used.

Server Databases

Running databases in a HyperSQL server is the best overall method of access. As the JVM process is separate from the application, this method is the most reliable as well as the most accessible method of running databases.

Upgrading Databases

Any database that is not produced with the release version of HyperSQL 2.0 must be upgraded to this version.

Procedure 16.1. Upgrading Databases Created with Version 1.8.x

1. Open the database with the jar that created it and perform the `SHUTDOWN` statement as an SQL statement.
2. Open the database with the HyperSQL 2.0 jar.
3. Perform the `SHUTDOWN COMPACT` statement..

The first step is to guarantee there is no `.log` file for the database. When upgrading an application that has been deployed on a large scale, it is sometimes not practical to perform the first step of this procedure (with the old jar). You can ignore the first step but you may lose part of the database statements that are stored in the `.log` file. Therefore you need to test with databases created with your application to make sure typical statements that are logged in the `.log` file are compatible with the new version. Examples of known incompatible statements are some DDL statements used for changing the data type or default values of column.

A note about `SHUTDOWN` modes. `SHUTDOWN COMPACT` is equivalent to `SHUTDOWN SCRIPT` plus opening the database and then performing a simple `SHUTDOWN`.

After upgrading a database, you may want to change some of its settings. For example, the new `SET FILES BACKUP INCREMENT TRUE` statement can improve the shutdown and checkpoint times of larger databases.

Once a database is upgraded to 2.0, it can no longer be used with previous versions of HyperSQL.

Upgrading From Older Versions

To upgrade from version 1.8.x with the default `TEXT` format script files, follow the instructions above. If the 1.8.x files have database script format set to `BINARY` or `COMPRESSED (ZIPPED)` you must issue the `SET SCRIPTFORMAT TEXT` and `SHUTDOWN SCRIPT` commands with the old version, then open with the new version of the engine. In most cases the upgrade is successful and complete.

It is strongly recommended to execute `SHUTDOWN COMPACT` after an automatic upgrade from previous versions.

If your database has been created with version 1.7.2 or 1.7.3, first upgrade to version 1.8.1 and perform a `SHUTDOWN SCRIPT` with this version. You can then upgrade the database to version 2.0.

To upgrade from older version database files (1.7.1 and older) that contain `CACHED` tables, use the `SCRIPT` procedure below. In all versions of HyperSQL, the `SCRIPT 'filename'` command (used as an SQL statement) allows you to save a full record of your database, including database object definitions and data, to a file of your choice. You can export a script file using the old version of the database engine and open the script as a database with 2.0.

Procedure 16.2. Upgrade Using the SCRIPT Procedure for Very Old Versions

1. Open the original database in the old version of DatabaseManager

2. Issue the `SCRIPT` command, for example `SCRIPT 'newversion.script'` to create a script file containing a copy of the database.
3. `SHUTDOWN` this database.
4. Copy the original `*.properties` file into `newversion.properties` in the same directory as `newversion.script`
5. Try to open the new database `newversion` using DatabaseManager of version 1.8.1.
6. If there is any inconsistency in the data, the script line number is reported on the console and the opening process is aborted. Edit and correct any problems in the `newversion.script` before attempting to open again. Use the guidelines in the next section (Manual Changes to the `.script` File). Use a programming editor that is capable of handling very large files and does not wrap long lines of text.

Manual Changes to the *.script File

In HyperSQL 2.0 the full range of `ALTER TABLE` commands is available to change the data structures and their names. However, if an old database cannot be opened due to data inconsistencies, or it uses index or column names that are not compatible with 2.0, manual editing of the `*.script` file can be performed and can be faster.

- Version 2.0 does not accept duplicate names for indexes that were allowed before 1.7.2.
- Version 2.0 does not accept some table or column names that are SQL reserved keywords without double quoting.
- Version 2.0 does not accept unquoted table or column names which begin with an underscore, unless the connection `sql.regular_names` is set false.
- Version 2.0 is more strict with check conditions and default values.

Other manual changes are also possible. Note that the `*.script` file must be the result of a `SHUTDOWN SCRIPT` and must contain the full data for the database. The following changes can be applied so long as they do not affect the integrity of existing data.

- Names

Names of tables, columns and indexes can be changed. These changes must be consistent regarding foreign key constraint references.

- CHECK

A check constraint can always be removed.

- NOT NULL

A not-null constraint can always be removed.

- PRIMARY KEY

A primary key constraint can be removed. It cannot be removed if there is a foreign key referencing the column(s).

- UNIQUE

A UNIQUE constraint can be removed if there is no foreign key referencing the column(s).

- FOREIGN KEY

A FOREIGN KEY constraint can always be removed.

- COLUMN TYPES

Some changes to column types are possible. For example an INTEGER column can be changed to BIGINT.

After completing the changes and saving the modified .script file, you can open the database as normal.

Backward Compatibility Issues

HyperSQL 2 conforms to the SQL Standard better than previous versions and has many more features. For these reasons, there may be some compatibility issues when converting old database, or using applications that were written for version 1.8.x or earlier. Some of the potential issues (and enhancements) are listed here. See the full list of connection properties for alternatives.

- By default, when comparison strings, the shorter string is padded with spaces. This has an effect on comparing 'test' and 'test ' which are now considered equal, despite the length difference. This behaviour is controlled by the default PAD SPACE property of collations, which can be changed to NO PAD. See the statement SET DATABASE COLLATION <name> [PAD SPACE | NO PAD].
- User names and passwords are case-sensitive. Check the .script file of a database for the correct case of user name and password and use this form in the connection properties or on connection URL.
- It is now possible to specify the admin username and password for a new database (instead of SA and the empty password).
- HyperSQL 2.0 has several settings that relax its conformance to the SQL Standard in the areas of type conversion and object names. These settings can be turned on for maximum conformance.
- Check constraints must conform to the SQL Standard. A check constraint is rejected if it is not deterministic or retrospectively deterministic. When opening an old database, HyperSQL silently drops check constraints that no longer compile. See under check constraints for more detail about what is not allowed.
- Type declarations in column definition and in cast expressions must have the necessary size parameters.
- In connection with the above, an old database that did not have the enforce_strict_size property, is now converted to version 2.0 with the engine supplying the missing size parameters. For example, a VARCHAR column declaration that has no size, is given a 32K size, a LONGVARCHAR column is given a 16MB size. Check these sizes are adequate for your use, and change the column definition as necessary.
- Column names in a GROUP BY clause were previously resolved to the column label. They are now resolved to column name first, and if the name does not match, to the column label.
- If two or more tables in a join contain columns with the same name, the columns cannot be referenced in join and where conditions. Use table names before column names to qualify the references to such columns. The SET DATABASE SQL REFERENCES { TRUE | FALSE } statement enables or disables this check.
- If the unqualified wild card is used, as in the statement SELECT * FROM ... no additional column references are allowed. A table-qualified wild card allows additional column references in the SELECT list
- Table definitions containing GENERATED BY DEFAULT AS IDENTITY but with no PRIMARY KEY do not automatically create a primary key. Database .script files made with 1.8 are fine, as the PRIMARY KEY clause is always included. But the CREATE TABLE statements in your application program may assume an automatic primary key is created. The old shortcut, IDENTITY, is retained with the same meaning. So CREATE TABLE T (ID IDENTITY, DAT VARCHAR(20)) is translated into CREATE TABLE T(ID INTEGER GENERATED

BY DEFAULT AS IDENTITY PRIMARY KEY, DAT VARCHAR(20)). This last form is the correct way of defining both autoincrement and primary key in versions 1.8 and 2.0.

- CREATE ALIAS is now obsolete. Use the new function definition syntax. The `org.hsqldb.Library` class no longer exists. You should use the SQL form of the old library functions. For example, use `LOG(x)` rather than the direct form, `"org.hsqldb.Library.log"(x)`.
- The names of some commands for changing database and session properties have changed. See the list of statements in this chapter.
- Computed columns in SELECT statements which did not have an alias: These columns had no `ResultMetaData` label in version 1.8, but in version 2.0, the engine generates labels such as C1, C2.
- The issue with the JDBC `ResultSetMetaData` methods, `getColumnName(int column)` and `getColumnLabel(int column)` has been clarified by the JDBC 4 specification. `getColumnName()` returns the underlying column name, while `getColumnLabel()` returns any specified or generated alias. HyperSQL 1.8 and 2.0 have a connection property, `get_column_name`, which defaults to true in version 2.0, but defaulted to false in some releases of version 1.8.x. You have to explicitly specify this property as false if you want (non-standard behaviour) `getColumnName()` to return the same value as `getColumnLabel()`.

HyperSQL Dependency Settings for Applications

Dependency settings using Gradle, Ivy, Maven, Groovy

This section is about building applications that have build-time dependencies upon HyperSQL, and for executions that use a dependency library system. Examples of the second type are unit test runs, job runs triggered by a build system, or systems like Grape that pull libraries from the network at end-user run time.

What version to Pull

The best option for most developers is to use our *snapshot repository*, or at least to depend upon the latest public version of HyperSQL with a range pattern like `[2 ,)`. Here are exceptional cases where you should depend on a static version.

- Your application has code dependencies upon version-specific details of the HyperSQL distribution. In this case, the specific dependency specification should be checked in to your source code control system alongside the code that manifests the version-dependency. If your code is enhanced to use a newer version of HyperSQL, you should update the version specification so that whenever code + configs are checked out, the dependency will always match the code.
- Your organization only allows the use of vetted libraries. In this case, you vigorously maintain your configurations, updating your dependencies and regression testing as soon as new versions of HyperSQL are vetted. To get the best performance and reliability from HyperSQL, you should urge the appropriate parties to vet new versions as soon as they are publicly released.
- You need precisely reproducible builds.

If none of these situations apply to you, then follow the suggestions in the appropriate sections below. If you need to specify a specific version, follow the instructions in the range-versioning section but change the version range specifications to literal versions like `2.2.9`.

Using the HyperSQL Snapshot Repository

Use the Latest & Greatest with Snapshots

For application testing, you may want to use the latest HSQLDB snapshot jar instead of the latest release jar. Snapshot jars contain fixes for reported bugs and the new features as they are being tested for the next release version. You

can use the snapshot jars where you would normally include a dependency to a release jar as a Maven artifact. The HyperSQL Snapshot repository resides at <http://hsqldb.org/repos/>



Limitation of Classifiers

Classifiers are incompatible with real repository *snapshots*. Builders can only publish one jar variant per product, and at this time our snapshot jars are always built debug-enabled with Java 6.

Where you insert the `<repository>` element depends on whether you want the definition to be personal, shared, or project-specific, so see the Maven documentation about that. But you can paste this element verbatim:

Example 16.3. HyperSQL Snapshot Repository Definition

```
<repository>
  <releases>
    <enabled>false</enabled>
  </releases>
  <snapshots>
    <enabled>true</enabled>
    <updatePolicy>always</updatePolicy>
    <checksumPolicy>fail</checksumPolicy>
  </snapshots>
  <id>hsqldb_snapshots</id>
  <name>HyperSQL Snapshots</name>
  <url>http://hsqldb.org/repos</url>
  <layout>default</layout>
</repository>
```

Snapshot Dependency Specification Examples

Example 16.4. Sample Snapshot Ivy Dependency

```
<dependency org="org.hsqldb" name="hsqldb" rev="SNAPSHOT" conf="buildOnly"/>
```

Example 16.5. Sample Snapshot Maven Dependency

```
<dependency>
  <groupId>org.hsqldb</groupId>
  <artifactId>hsqldb</artifactId>
  <version>SNAPSHOT</version>
  <!-- Scope defaults to "compile":
  <scope>test</scope>
  -->
</dependency>
```

Example 16.6. Sample Snapshot Gradle Dependency

```
dependencies.compile (group: 'org.hsqldb', name: 'hsqldb', version: 'SNAPSHOT')
dependencies {
    runtime 'org.hsqldb:hsqldb:SNAPSHOT',
           'org.hsqldb:sqltool:SNAPSHOT'
}
```

If you want to use an `ivy.xml` file with a Gradle build, you will need use the `Ivyxml Gradle Plugin` [<https://github.com/unsaved/gradle-ivyxml-plugin>]. It just takes a few lines of code in your `build.gradle` file to hook in `ivy.xml`. See the `Ivyxml` documentation [<https://github.com/unsaved/gradle-ivyxml-plugin/raw/master/README.txt>] to see exactly how.

Example 16.7. Sample Snapshot ivy.xml loaded by Ivyxml plugin

```
<ivy-module version="2.0">
  ...
  <dependency org="org.hsquidb" name="hsquidb" rev="SNAPSHOT"/>
```

Example 16.8. Sample Snapshot Groovy Dependency, using Grape

```
@Grab(group='org.hsquidb', module='hsquidb', version='SNAPSHOT')
```

Range Versioning

Keeping up-to-date with Range Dependencies



Limitation of Maven Version Range Specifiers

Note that Ivy (and the many systems that use Ivy underneath, like Grape and Gradle) supports the opening exclusive] in addition to [, whereas Maven supports only the opening inclusive [specifier. See the relevant Ivy [http://ant.apache.org/ivy/history/latest-milestone/ivyfile/dependency.html] or Maven [http://docs.codehaus.org/display/MAVEN/Dependency+Mediation+and+Conflict+Resolution#DependencyMediationandConflictResolution-DependencyVersionRanges] documentation for details. There are special cases where you should depend on a specific version instead.

Range Dependency Specification Examples



Important

For all examples below, when a range pattern is given, it means the latest version equal or greater than version 2. If a classifier is shown, it is optional and you can skip it to get the default (no-classifier) jar.

Example 16.9. Sample Range Ivy Dependency

```
<dependency org="org.hsquidb" name="hsquidb" rev="[2,)" conf="j6->default"/>
```

I give no example here of specifying a *classifier* in *ivy.xml* because I have so far failed to get that to succeed. Classifiers in *ivy.xml* are supported if using Gradle, as covered below.

Example 16.10. Sample Range Maven Dependency

See note above about Maven range specifications.

```
<dependency>
  <groupId>org.hsquidb</groupId>
  <artifactId>hsquidb</artifactId>
  <version>[2,)</version>
  <!-- Scope defaults to "compile":
  <scope>test</scope>
  Use a classifier to pull one of our alternative jars:
  <classifier>jdk5</classifier>
  -->
</dependency>
```

Example 16.11. Sample Range Gradle Dependency

```
dependencies.compile (group: 'org.hsqldb', name: 'hsqldb', version:'[2,)', classifier: 'jdk5')
dependencies {
    runtime 'org.hsqldb:hsqldb:[2,):jdk6debug@jar',
           'org.hsqldb:sqltool:[2,):jdk6debug@jar'
}
```

If you want to use an `ivy.xml` file with a Gradle build, you will need use the `Ivyxml Gradle Plugin` [<https://github.com/unsaved/gradle-ivyxml-plugin>]. It just takes a few lines of code in your `build.gradle` file to hook in `ivy.xml`. See the `Ivyxml` documentation [<https://github.com/unsaved/gradle-ivyxml-plugin/raw/master/README.txt>] to see exactly how.

Example 16.12. Sample Range `ivy.xml` loaded by `Ivyxml` plugin

```
<ivy-module version="2.0" xmlns:m="http://ant.apache.org/ivy/maven">
...
<dependency org="org.hsqldb" name="hsqldb" rev="[2,)" m:classifier="jdk5"/>
```

Example 16.13. Sample Range Groovy Dependency, using `Grape`

```
@Grab(group='org.hsqldb', module='hsqldb', version='[2,)', classifier='jdk6debug')
```

Appendix A. Lists of Keywords

List of SQL Keywords

Fred Toussi, The HSQL Development Group

\$Revision: 847 \$

2016-05-15 15:57:21-0400

List of SQL Standard Keywords

According to the SQL Standard, the SQL Language keywords cannot be used as identifiers (names of database objects such as columns and tables) without quoting.

HyperSQL has two modes of operation, which are selected with the `SET DATABASE SQL NAMES { TRUE | FALSE }` to allow or disallow the keywords as identifiers. The default mode is `FALSE` and allows the use of most keywords as identifiers. Even in this mode, keywords cannot be used as `USER` or `ROLE` identifiers. When the mode is `TRUE`, none of the keywords listed below can be used as identifiers.

All keywords can be used with double quotes as identifiers. For example

```
CREATE TABLE "ALL" ("AND" INT, "WHEN" INT)
SELECT "AND" FROM "ALL" WHERE "WHEN" = 2020
```

ABS • ALL • ALLOCATE • ALTER • AND • ANY • ARE • ARRAY • AS • ASENSITIVE • ASYMMETRIC • AT
• ATOMIC • AUTHORIZATION • AVG

BEGIN • BETWEEN • BIGINT • BINARY • BLOB • BOOLEAN • BOTH • BY

CALL • CALLED • CARDINALITY • CASCADED • CASE • CAST • CEIL • CEILING • CHAR • CHAR_LENGTH
• CHARACTER • CHARACTER_LENGTH • CHECK • CLOB • CLOSE • COALESCE • COLLATE • COLLECT
• COLUMN • COMMIT • COMPARABLE • CONDITION • CONNECT • CONSTRAINT • CONVERT • CORR
• CORRESPONDING • COUNT • COVAR_POP • COVAR_SAMP • CREATE • CROSS • CUBE • CUME_DIST
• CURRENT • CURRENT_CATALOG • CURRENT_DATE • CURRENT_DEFAULT_TRANSFORM_GROUP •
CURRENT_PATH • CURRENT_ROLE • CURRENT_SCHEMA • CURRENT_TIME • CURRENT_TIMESTAMP
• CURRENT_TRANSFORM_GROUP_FOR_TYPE • CURRENT_USER • CURSOR • CYCLE

DATE • DAY • DEALLOCATE • DEC • DECIMAL • DECLARE • DEFAULT • DELETE • DENSE_RANK •
DEREF • DESCRIBE • DETERMINISTIC • DISCONNECT • DISTINCT • DO • DOUBLE • DROP • DYNAMIC

EACH • ELEMENT • ELSE • ELSEIF • END • END_EXEC • ESCAPE • EVERY • EXCEPT • EXEC • EXECUTE
• EXISTS • EXIT • EXP • EXTERNAL • EXTRACT

FALSE • FETCH • FILTER • FIRST_VALUE • FLOAT • FLOOR • FOR • FOREIGN • FREE • FROM • FULL •
FUNCTION • FUSION

GET • GLOBAL • GRANT • GROUP • GROUPING

HANDLER • HAVING • HOLD • HOUR

IDENTITY • IN • INDICATOR • INNER • INOUT • INSENSITIVE • INSERT • INT • INTEGER • INTERSECT •
INTERSECTION • INTERVAL • INTO • IS • ITERATE

JOIN

LAG

LANGUAGE • LARGE • LAST_VALUE • LATERAL • LEAD • LEADING • LEAVE • LEFT • LIKE •
LIKE_REGEX • LN • LOCAL • LOCALTIME • LOCALTIMESTAMP • LOOP • LOWER

MATCH • MAX • MAX_CARDINALITY • MEMBER • MERGE • METHOD • MIN • MINUTE • MOD • MODIFIES • MODULE • MONTH • MULTISSET

NATIONAL • NATURAL • NCHAR • NCLOB • NEW • NO • NONE • NORMALIZE • NOT • NTH_VALUE • NTILE • NULL • NULLIF • NUMERIC

OCCURRENCES_REGEX • OCTET_LENGTH • OF • OFFSET • OLD • ON • ONLY • OPEN • OR • ORDER • OUT • OUTER • OVER • OVERLAPS • OVERLAY

PARAMETER • PARTITION • PERCENT_RANK • PERCENTILE_CONT • PERCENTILE_DISC • POSITION • POSITION_REGEX • POWER • PRECISION • PREPARE • PRIMARY • PROCEDURE

RANGE • RANK • READS • REAL • RECURSIVE • REF • REFERENCES • REFERENCING • REGR_AVGX • REGR_AVGY • REGR_COUNT • REGR_INTERCEPT • REGR_R2 • REGR_SLOPE • REGR_SXX • REGR_SXY • REGR_SYY • RELEASE • REPEAT • RESIGNAL • RESULT • RETURN • RETURNS • REVOKE • RIGHT • ROLLBACK • ROLLUP • ROW • ROW_NUMBER • ROWS

SAVEPOINT • SCOPE • SCROLL • SEARCH • SECOND • SELECT • SENSITIVE • SESSION_USER • SET • SIGNAL • SIMILAR • SMALLINT • SOME • SPECIFIC • SPECIFICTYPE • SQL • SQLEXCEPTION • SQLSTATE • SQLWARNING • SQRT • STACKED • START • STATIC • STDDEV_POP • STDDEV_SAMP • SUBMULTISSET • SUBSTRING • SUBSTRING_REGEX • SUM • SYMMETRIC • SYSTEM • SYSTEM_USER

TABLE • TABLESAMPLE • THEN • TIME • TIMESTAMP • TIMEZONE_HOUR • TIMEZONE_MINUTE • TO • TRAILING • TRANSLATE • TRANSLATE_REGEX • TRANSLATION • TREAT • TRIGGER • TRIM • TRIM_ARRAY • TRUE • TRUNCATE

UESCAPE • UNDO • UNION • UNIQUE • UNKNOWN • UNNEST • UNTIL • UPDATE • UPPER • USER • USING

VALUE • VALUES • VAR_POP • VAR_SAMP • VARBINARY • VARCHAR • VARYING

WHEN • WHENEVER • WHERE • WIDTH_BUCKET • WINDOW • WITH • WITHIN • WITHOUT • WHILE

YEAR

List of SQL Keywords Disallowed as HyperSQL Identifiers

When the default `SET DATABASE SQL NAMES FALSE` mode is used, only a subset of SQL Standard keywords cannot be used as HyperSQL identifiers. The keywords are as follows:

ALL • AND • ANY • AS • AT • AVG

BETWEEN • BOTH • BY

CALL • CASE • CAST • COALESCE • CORRESPONDING • CONVERT • COUNT • CREATE • CROSS

DEFAULT • DISTINCT • DROP

ELSE • EVERY • EXISTS • EXCEPT

FOR • FROM • FULL

GRANT • GROUP

HAVING

IN • INNER • INTERSECT • INTO • IS

JOIN

LEFT • LEADING • LIKE

MAX • MIN

NATURAL • NOT • NULLIF

ON • ORDER • OR • OUTER

PRIMARY

REFERENCES • RIGHT

SELECT • SET • SOME • STDDEV_POP • STDDEV_SAMP • SUM

TABLE • THEN • TO • TRAILING • TRIGGER

UNION • UNIQUE • USING

VALUES • VAR_POP • VAR_SAMP

WHEN • WHERE • WITH

Special Function Keywords

HyperSQL supports SQL Standard functions that are called without parentheses. These functions include `CURRENT_DATE`, `LOCALTIMESTAMP`, `TIMEZONE_HOUR`, `USER`, etc. When the default `SET DATABASE SQL NAMES FALSE` mode is used, keywords that are names of SQL functions can be used as column names without double quotes in `CREATE TABLE` statements. But when the identifier is a column name and is referenced in `SELECT` or other statements, the keywords must be double quoted. Otherwise the result of the SQL function is returned instead of the column value.

HyperSQL also supports non-standard functions `SYSTIMESTAMP`, `CURDATE`, `CURTIME`, `TODAY`, `SYSDATE` and `NOW` which can be called with or without parentheses (e.g. `NOW()` or `NOW`). These names can be used as column names, but the names must be double quoted in `SELECT` and other statements.

Appendix B. Building HyperSQL Jars

How to build customized or specialized jar files

Fred Toussi, The HSQL Development Group

\$Revision: 5581 \$

2016-05-15 15:57:21-0400

Purpose

From version 2.0, the supplied `hsqldb.jar` file is built with Java 1.6. If you want to run with a 1.5 JVM, or if you want to use an alternative jar (`hsqldb-min.jar`, etc.) you must build the desired jar with a Java SDK.

The Gradle task / Ant target `explainjars` reports the versions of Java and Ant actually used.

Building with Gradle

As noted above, Java SDK 5 or later is required.

Unlike most software build systems, you do not need to have the Gradle system installed on your computer to use it. You don't need to understand the details to use it, but this is the purpose of the `gradlew wrapper` scripts that you can see in HyperSQL's `build` directory. If you want or need to learn more about Gradle, you can start on the Gradle Documentation page [<http://gradle.org/documentation>] on the Gradle web site [<http://gradle.org>].



Gradle honors JAVA_HOME

Gradle can find the Java to use by finding out where `java` is available from, but if environmental variable `JAVA_HOME` is set, that will override. Therefore, if you have multiple JREs or JDKs installed, or don't know if multiple are installed, you should set environmental variable `JAVA_HOME` to definitively eliminate all ambiguity.



Rare Gotcha

Depending on your operating system, version, and how you installed your JDK, Gradle may not be able to find the JDK. Gradle will inform you if this happens. The easiest way to fix this problem is to set environmental variable `JAVA_HOME` to the root directory where your Java SDK is installed. (See previous *note* for justification). So as not to get bogged down in the details here, if you don't know how to set an environmental variable, I ask you to utilize a search engine.

Invoking a Gradle Build Graphically

Whether from an IDE, a shortcut or launch icon, to run a Gradle graphical build you just need to execute either the file `gradle-gui.cmd` (on Windows) or `gradle-gui` (all other platforms), both of which reside in the `build` directory of your HyperSQL distribution.

I will explain how to invoke a graphical Gradle build from Windows Explorer and from Eclipse IDE. Users of other operating systems should be able to infer how to use their own file manager in the same way as shown for Internet Explorer. Users who want a desktop shortcut, quick-launch icon should first get Gradle working from a file manager (like Windows Explorer), then seek out instructions for making shortcuts, etc. for your operating system or desktop manager. (Try a web search).

Some IDEs, like IntelliJ have direct support for Gradle. The Spring Framework team is working on a sophisticated plugin for using Gradle with their IDE. But I'm going to document a very basic setup done with Eclipse because it's serviceable and a very similar procedure is likely to work with all other IDEs.


If you do use and enjoy Gradle, then I urge you to make the product better by registering a free account for yourself at the Gradle Jira site [<http://issues.gradle.org/>] and vote for critical usability issues like GRADLE-427 [<http://issues.gradle.org/browse/GRADLE-427>], GRADLE-1855 [<http://issues.gradle.org/browse/GRADLE-1855>], GRADLE-1870 [<http://issues.gradle.org/browse/GRADLE-1870>], GRADLE-1871 [<http://issues.gradle.org/browse/GRADLE-1871>], to help to improve the product.

Procedure B.1. Invoking Gradle GUI from Windows Explorer

1. Start up Windows explorer. Depending on your Windows version, it will be in the Start Menu, or in the menu you get when you right-click Start.
2. Navigate Windows Explorer to the `build` directory within your HyperSQL installation.
3. Find an icon or line (depending on your Windows Explorer view) for the file `gradle-gui.cmd`. If there is no listing for `gradle-gui.cmd`, but two listings for `gradle-gui`, then you want the one signified by text, icon, or mouse-over tooltip, as a *batch or CMD file*. Double-click this item.

Procedure B.2. Setting up Gradle Graphical Builds from Eclipse IDE

1. From Eclipse, use pulldown menu Run / External Tools / External Tools Configurations....
2. Right-click on Program in the left navigator Right-click Project in the left navigator panel and select New. (Depending on the state of your workspace, instead of New in the context-sensitive menu, there may be a `New_configuration` or similar item nested under Program, in which case you should select that).
3. To the right, change the value in the Name: field to `HSQLDB Gradle` (or whatever name you want for this launcher config (this Gradle launcher is only for your HSQLDB project)).
4. Make sure that the Main tab is selected.
5. For the Location: field, use the Browse Workspace... button to navigate to and select the `gradle-gui.cmd` (Windows) or `gradle-gui` (other) file in the `build` directory of your HyperSQL project.

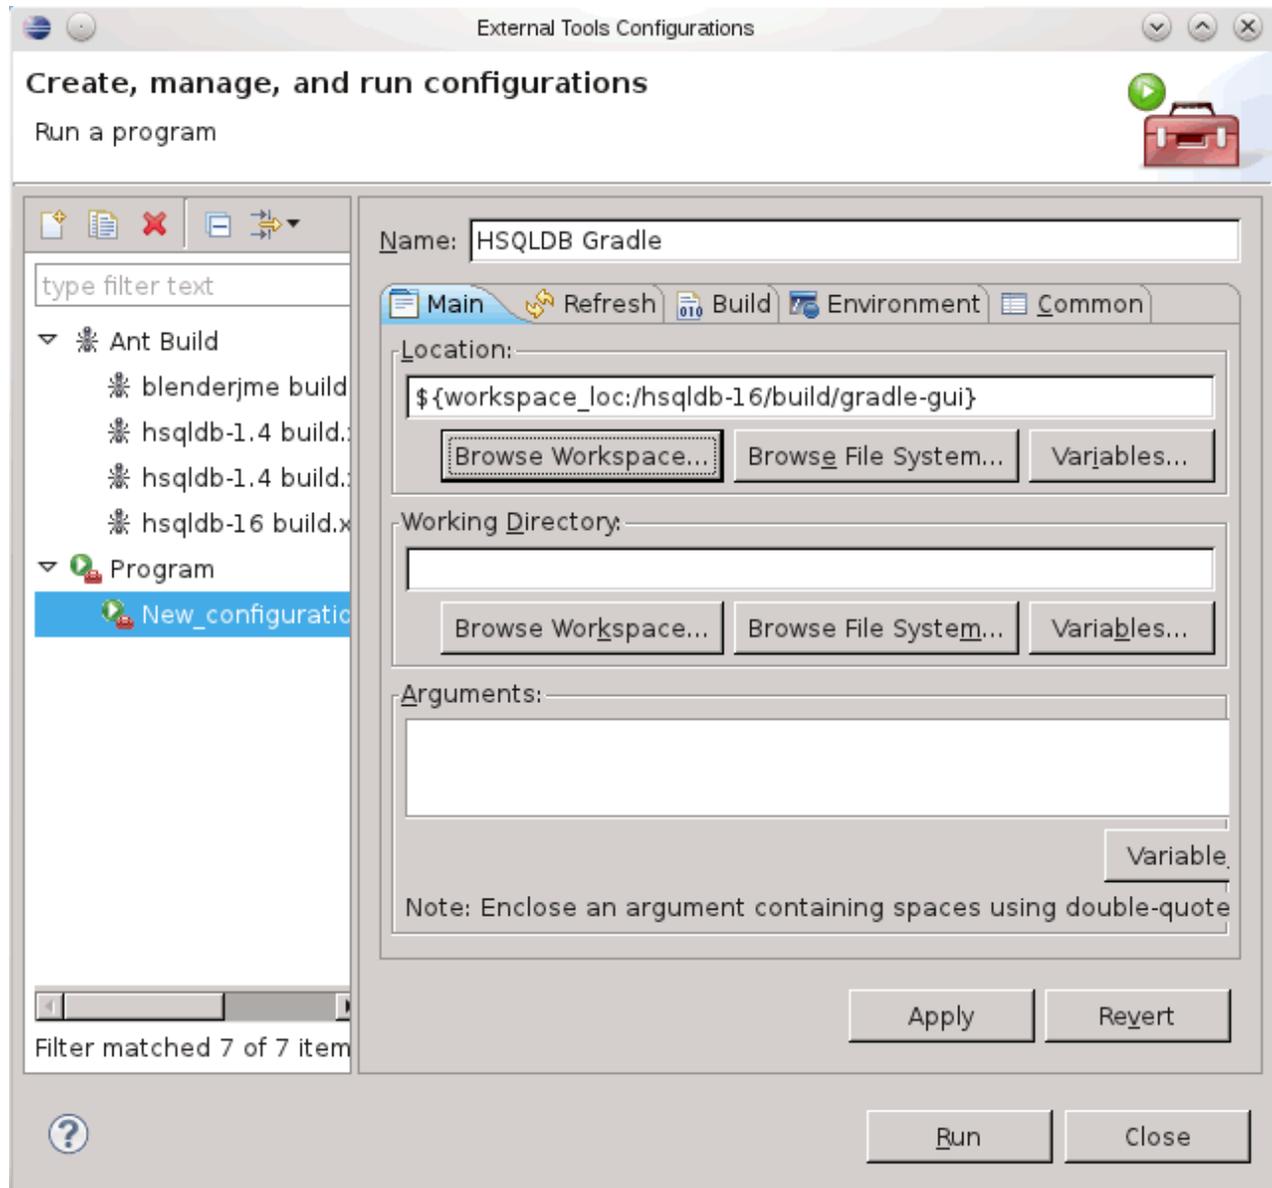


Configuring Gradle GUI Launcher in Eclipse

Depending on your Eclipse version and workspace setup, the value populated into the Location: field after you select the program may appear very differently than in this screen shot.

- Click the Run button. The Gradle Gui should run. (If you just Apply and Close here instead of Run, the new Gradle launch item will not be added to the pulldown and toolbar menus).

After doing the Eclipse setup, you can use pulldown menu Run / External Tools or the equivalent tool bar button to launch the Gradle Gui.

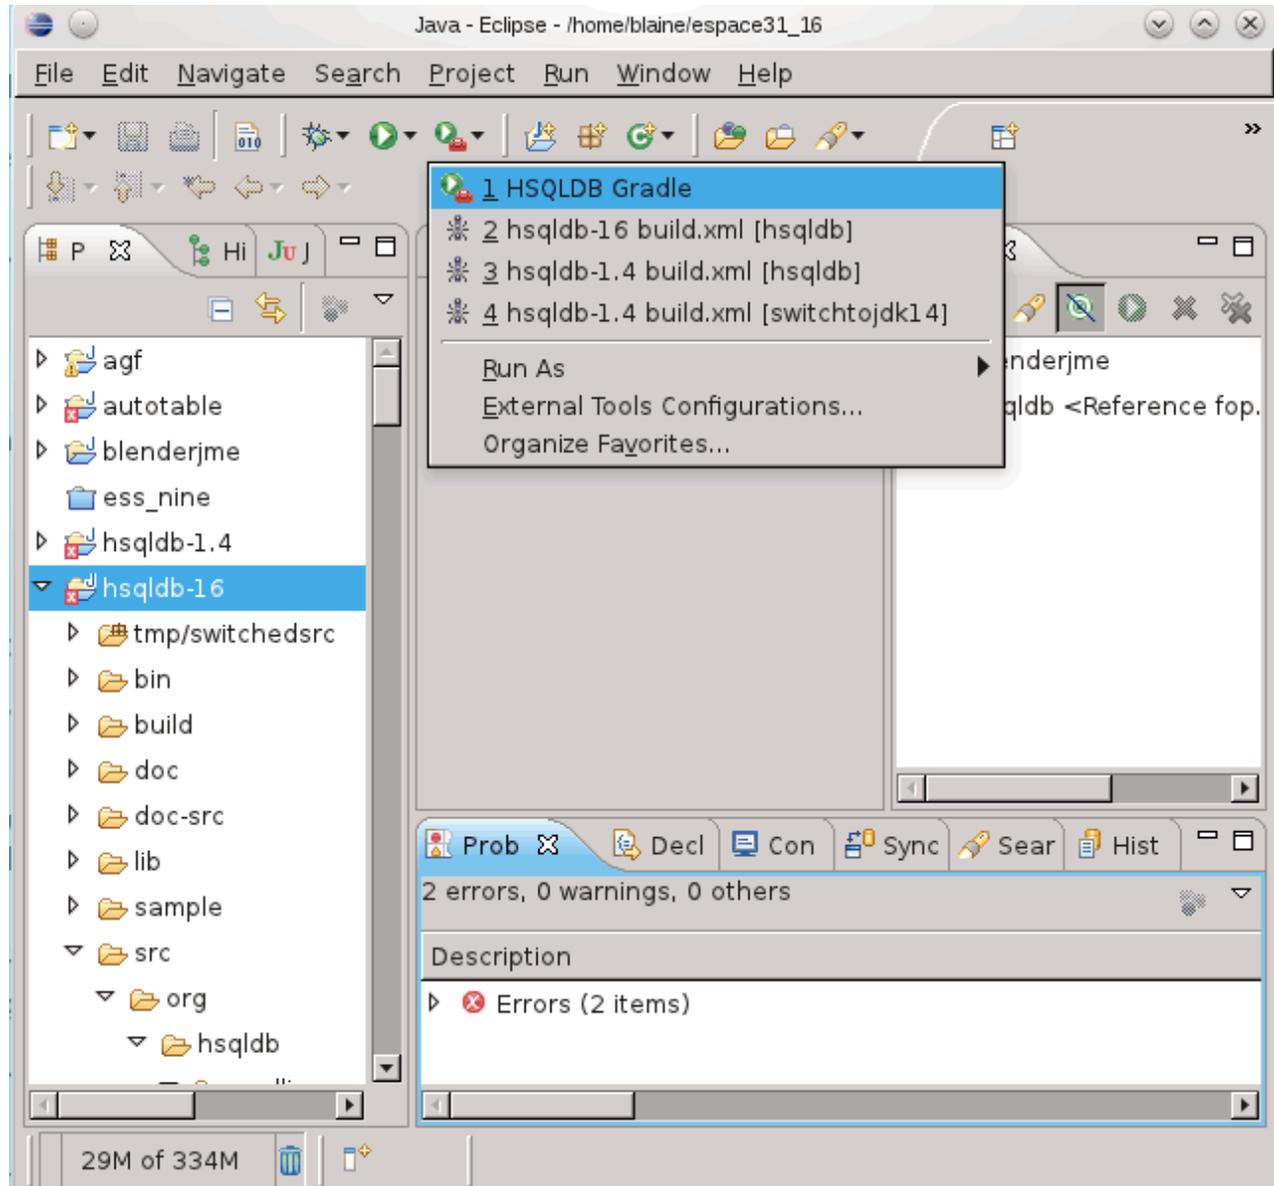

Invoking Gradle GUI from Eclipse

You can do this and close it after each use, or, to avoid startup lag, minimize it when it's not in use.

Invoking a Gradle Build from the Command Line

You can invoke graphical and non-graphical Gradle builds from the command-line.

1. Get a command-line shell. Windows users can use either Start/Run... or Start/Start Search, and enter "cmd". Non-windows users will know how to get a shell.
2. In the shell, cd to the `build` directory under the root directory where you extracted or installed HyperSQL to. (Operating system search or find functions can be used if you can't find it quickly by poking around on the command line or with Windows Explorer, etc.).
3. Windows users can ignore this step. UNIX shell users should ensure that the current directory (`.`) is in their search path, or prefix their `gradlew` or `gradlew -gui` command in the next step with `./` (e.g., like `./gradlew`).

4. In the shell, run either `gradle-gui` for a graphical build; or `gradlew` for a text-based build.

The `gradle-gui` file is our own wrapper script for `gradlew --gui`. Be aware that both `gradle-gui` and `gradlew --gui` suffer from the limitation that the `--gui` switch is mutually exclusive with most or all other arguments (including tasks). I have registered GRADLE bugs 1861 and 1863 about this.

Using Gradle

Using Text-based Gradle

If you ran just `gradlew` or `gradlew.bat`, then you will be presented with simple instructions for how to do everything that you want to do. Basically, you will run the same `gradlew` or `gradlew.bat` command repeatedly, with different switches and arguments.



Note

Gradle's `-v` switch reports version details more directly than the `explainjars` task does, from the operating system version to the Groovy version (the language interpreter used for Gradle instructions).

3. Scroll to the `help` task and click it once to select it, then click the green Execute toolbar button above. (You could also have double-clicked the item, but you can use the selection procedure to pick multiple tasks with Control or Shift keys to execute multiple tasks in a single run-- and the tasks will execute in the same order that you had selected them).
4. Scroll through and read the output of the `help` task in the bottom panel. Where this help screen speaks about verbosity switches, you can accomplish the same thing by using the Setup tab. Whenever Gradle output (in the bottom panel) talks about running `gradlew <someTask> . . .`, you can execute the specified task(s) by selecting and executing them like we just did.



Gradle GUI Limitations

The Gradle GUI is fairly new and lacks some of the power available to text-based users. Most significantly, in my opinion, is the following item for which I have opened Gradle *issues* 1855. There is no convenient way to set build properties. If you want to change Ant or Gradle build settings, edit the text file `build.properties` in the HyperSQL build directory (creating it if it doesn't exist yet), and enter your properties using Java properties file syntax. (You can also use `local-docbook.properties` in the same way for DocBook-specific properties).

Building with Apache Ant

You should use version 1.7.x of Ant (Another Neat Tool) to do Ant builds with HyperSQL.

Obtaining Ant

Ant is a part of the Jakarta/Apache Project.

- Home of the Apache Ant project [<http://ant.apache.org>]
- The Installing Ant [<http://ant.apache.org/manual/install.html#installing>] page of the Ant Manual [<http://ant.apache.org/manual>]. Follow the directions for your platform.

Building Hsqldb with Ant

Once you have unpacked the zip package for hsqldb, under the `/hsqldb` folder, in `/build` there is a `build.xml` file that builds the `hsqldb.jar` with Ant (Ant must be already installed). To use it, change to `/build` then type:

```
ant -projecthelp
```

This displays the available ant targets, which you can supply as command line arguments to ant. These include

<code>hsqldb</code>	to build the <code>hsqldb.jar</code> file
<code>explainjars</code>	Lists all targets which build jar files, with an explanation of the purposes of the different jars.
<code>clean</code>	to clean up the <code>/classes</code> directory that is created
<code>clean-all</code>	to remove the old jar and doc files as well
<code>javadoc</code>	to build javadoc
<code>hsqldbmain</code>	to build a smaller jar for HSQLDB that does not contain utilities
<code>hsqldbclient</code>	to build an extremely small jar containing only the client-side JDBC driver (can connect only to a HyperSQL Server).

`hsqldbmin` to build a small jar that supports *in-process* catalogs, but neither running nor connecting to HyperSQL Servers.

`sqltool` to build `sqltool.jar`, which contains only the `SqlTool` classes.

... Many more targets are available. Run `ant -p` and `ant explainjars`.

HSQldb can be built in any combination of two JRE (Java Runtime Environment) versions and many jar file sizes.

A jar built with an older JRE is compatible for use with a newer JRE (you can compile with Java 1.5 and run with 1.6). But the newer JDBC capabilities of the JRE will be not be available.

The client jar (`hsqldbjdbc.jar`) contains only the HSQldb JDBC Driver client. The smallest engine jar (`hsqldbmin.jar`) contains the engine and the HSQldb JDBC Driver client. The default size (`hsqldb.jar`) also contains server mode support and the utilities. The largest size (`hsqldbtest.jar`) includes some test classes as well. Before building the `hsqldbtest.jar` package, you should download the junit jar from <http://www.junit.org> and put it in the `/lib` directory, alongside `servlet.jar`, which is included in the `.zip` package.

If you want your code built for high performance, as opposed to debugging (in the same way that we make our production distributions), make a file named `build.properties` in your build directory with the contents

```
build.debug: false
```

The resulting Java binaries will be faster and smaller, at the cost of exception stack traces not identifying source code locations (which can be extremely useful for debugging).

After installing Ant on your system use the following command from the `/build` directory. Just run `ant explainjars` for a concise list of all available jar files.

```
ant explainjars
```

The command displays a list of different options for building different sizes of the HSQldb Jar. The default is built using:

Example B.1. Building the standard Hsqldb jar file with Ant

```
ant hsqldb
```

The Ant method always builds a jar with the JDK that is used by Ant and specified in its `JAVA_HOME` environment variable.

Building for Older JDKs

HyperSQL version 2.0 cannot be directly compiled or used with JDK 1.4. It may be possible to use the RetroTranslator tool to achieve this. The suggested procedure is as follows: First use Gradle or Ant with JDK 1.5 and build the jar. Then translate the jar using RetroTranslator with `backport` (which bundles replacement classes for concurrency control). This translation should cover the concurrency features that are specific to version 1.5 and later.

```
ant switchtojdk14
ant hsqldb
-- translate the jar
```

Building with IDE Compilers

All HyperSQL source files are supplied ready to compile. There is no complex pre-compile stage. It is therefore possible to compile the sources with an IDE, without using Gradle or Ant. Only if compilation with Java 1.5 is required,

you should first run the Gradle task (or Ant target) before compiling and remove from the source directories a few source files that are specific to Java 6 (these are listed in the build.xml file).

Hsqldb CodeSwitcher

CodeSwitcher is a tool to manage different version of Java source code. It allows to compile HyperSQL for different JDKs. It is something like a precompiler in C but it works directly on the source code and does not create intermediate output or extra files.

CodeSwitcher is used internally in the Ant build. You do not have to invoke it separately to compile HyperSQL.

CodeSwitcher reads the source code of a file, removes comments where appropriate and comments out the blocks that are not used for a particular version of the file. This operation is done for all files of a defined directory, and all subdirectories.

Example B.2. Example source code before CodeSwitcher is run

```
...
//#ifdef JAVA2
    properties.store(out, "hsqldb database");
//#else
/*
    properties.save(out, "hsqldb database");
*/
//#endif
...
```

The next step is to run CodeSwitcher.

Example B.3. CodeSwitcher command line invocation

```
java org.hsqldb.util.CodeSwitcher . -JAVA2
```

The '.' means the program works on the current directory (all subdirectories are processed recursively). -JAVA2 means the code labelled with JAVA2 must be switched off.

Example B.4. Source code after CodeSwitcher processing

```
...
//#ifdef JAVA2
/*
    pProperties.store(out, "hsqldb database");
*/
//#else
```

```
pProperties.save(out, "hsqldb database");  
  
//#endif  
  
...
```

For detailed information on the command line options run `java org.hsqldb.util.CodeSwitcher`. Usage examples can be found in the `build.xml` file in the `/build` directory.

Building Documentation

The JavaDoc can be built simply by invoking the `javadoc` task/target with Gradle or Ant.

The two Guides (the one you are reading now plus the Utilities user guide) are in DocBook XML source format. To rebuild to PDF or one of the HTML output formats from the XML source, run the Gradle target `gen-docs` (or the Ant target `gen-docs`). Instructions will be displayed. In particular

- Obtain the HyperSQL documentation source. We no longer include our Guide source files in our main distribution zip file, in order to keep it small. You may want to build from the trunk branch or the latest release tag. You can download a static snapshot tarball from <http://hsqldb.svn.sourceforge.net/viewvc/hsqldb/base/trunk/> or under <http://hsqldb.svn.sourceforge.net/viewvc/hsqldb/base/tags/>, or you can export a snapshot or check out a work area using a Subversion client.
- You must locally install the DocBook set of image files, which are available for download from Sourceforge. The `gen-docs` task/target will tell you of a Gradle task that you can use to download and install them automatically. This Gradle task, `installDbImages`, will tell you how to edit a properties text file to tell it what directory to install the files into. (Command-line, as opposed to GUI, builders, can use the Gradle `-P` switch to set the property, instead of editing, if they prefer).
- You can optionally install the entire DocBook style sheets (instead of just the DocBook images within it), character entity definitions, and RNG schema file, to speed up doc build times and minimize dependency of future builds upon network or Internet. An intermediate approach would be to install these resources onto an HTTP server or shared network drive of your own. See the comments at the top of the file `build.xml` in the HyperSQL build directory about where to obtain these things and how to hook them in. The same Gradle task `installDbImages` explained above can download and install the entire stylesheet bundle (this option is offered the first time that you run the `installDbImages` task).



Tip

If running Gradle, you probably want to turn logging up to level *info* for generation and validation tasks, because the default *warn/lifecycle* level doesn't give much feedback.

The task/target `validate-docs` is also very useful to DocBook builders.

The documentation license does not allow you to post modifications to our guides, but you can modify them for internal use by your organization, and you can use our DocBook system to write new DocBook documents related or unrelated to HyperSQL. To create new DocBook documents, create a subdirectory off of `doc-src` for each new document, with the main DocBook source file within having same name as the directory plus `.xml`. See the peer directory `util-guide` or `guide` as an example. If you use the high-level tasks/target `gen-docs` or `validate-docs`, then copy and paste to add new stanzas to these targets in file `build.xml`.

Editors of DocBook documents (see previous paragraph for motive) may find it useful to have a standalone XML validator so you can do your primary editing without involvement of the build system. Use the Gradle target `standaloneValidation` for this. It will tell you how to set a build property to tell it where to install the validator, and will give instructions on how to use it.

There are several properties that can be used to dramatically decrease run times for partial doc builds. Read about these properties in comment at the top of the file `build-docbook.xml` in the `build` directory.

- `validation.skip`
- `html.skip`
- `chunk.skip`
- `fo.skip`
- `pdf.skip`
- `doc.name`
- `doc.target`

See the file `doc-src/readme-docauthors.txt` for details about our DocBook build system (though as I write this it is somewhat out of date).

Appendix C. HyperSQL with OpenOffice

How to use HyperSQL with OpenOffice.org

Fred Toussi, The HSQL Development Group

\$Revision: 5581 \$

2016-05-15 15:57:21-0400

HyperSQL with OpenOffice

OpenOffice.org / LibreOffice / ApacheOpenOffice includes HyperSQL and uses it for embedded databases. Our collaboration with OpenOffice.org developers over 6 years has benefited the development and maturity of HyperSQL. Before integration into OOo, HSQLDB was intended solely for application-specific database access. The application developer was expected to resolve any integration issues. Because OpenOffice.org is used by a vast range of users, from schoolchildren to corporate developers, a much higher level of quality assurance has been required. We have achieved it with constant help and feedback from OOo users and developers.

Apart from embedded use, you may want to use OpenOffice / LibreOffice with a HyperSQL server instance. The typical use for this is to allow multiple office users access to the same database.

There is also a strong case for using OpenOffice to develop your database schema and application, even if the database is intended for your own application, rather than OpenOffice.

HSQLDB version 1.8.0 is included in OOo, ApacheOpenOffice and LibreOffice. You can simply replace the jar with an HSQLDB version 2.3.4 jar to use the latest capabilities with external databases. It is not yet possible to create and use embedded databases with this version.

HSQLDB version 2.x jar will hopefully be included in the future versions of ApacheOpenOffice and LibreOffice.

Using OpenOffice / LibreOffice as a Database Tool

OpenOffice is a powerful database front end. If you want to create schemas, edit tables, edit the database contents manually, design and produce well-formatted reports, then OpenOffice is probably the best open source tools currently available.

To connect from OpenOffice to your database, first run a local server instance for the database. This is describes in the Network Listeners chapter of this guide.

When you connect from OpenOffice.org, you must specify connection to an external database and use the URL property "default_schema=true". For example, the URL to connect the local database may be like

```
jdbc:hsqldb:hsql://localhost/mydb;default_schema=true
```

The only current limitation is that OpenOffice only works with the PUBLIC schema. This limitation will hopefully disappear in the future versions of OOo.

There wil hopefully be a version HSQLDB 2.x jar in the future versions of OpenOffice.

Converting .odb files to use with HyperSQL Server

You may already have an OOo database file, which you want to use outside OOo, or as a server database. The file is in fact in the standard ZIP format and contains the normal HyperSQL database files. Just use a utility such as 7Zip to expand the .odb file. In the /db directory, there are files such as .script, .data, etc. Just rename these files into mydb.script, mydb.data, etc. You can now open the mydb database directly with HyperSQL as an embedded database or as a server instance.

Appendix D. HyperSQL File Links

HyperSQL Files referred to in this Guide

HyperSQL files referred to in the text may be retrieved from the canonical HyperSQL documentation site, <http://hsqldb.org/doc/2.0>, or from the same location you are reading this page from.



Note

If you are reading this document with a standalone PDF reader, only the [http://hsqldb.org/doc/2.0/...](http://hsqldb.org/doc/2.0/) links will function.

Pairs of local + <http://hsqldb.org/doc/2.0> links for referenced files.

- Local: `../apidocs/org/hsqldb/jdbc/JDBCConnection.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JDBCConnection.html>
- Local: `../apidocs/org/hsqldb/jdbc/JBCDriver.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JBCDriver.html>
- Local: `../apidocs/org/hsqldb/jdbc/JBCDatabaseMetaData.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JBCDatabaseMetaData.html>
- Local: `../apidocs/org/hsqldb/jdbc/JBCResultSet.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JBCResultSet.html>
- Local: `../apidocs/org/hsqldb/jdbc/JBCStatement.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JBCStatement.html>
- Local: `../apidocs/org/hsqldb/jdbc/JBCPreparedStatement.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/jdbc/JBCPreparedStatement.html>
- Local: `../apidocs/org/hsqldb/util/MainInvoker.html`
<http://hsqldb.org/doc/2.0/apidocs/org/hsqldb/util/MainInvoker.html>
- Local: `../apidocs/index.html`
<http://hsqldb.org/doc/2.0/apidocs/>
- Local: `../verbatim/src/org/hsqldb/server/Servlet.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/server/Servlet.java>
- Local: `../verbatim/src/org/hsqldb/Tokens.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/Tokens.java>
- Local: `../verbatim/src/org/hsqldb/server/WebServer.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/server/WebServer.java>

- Local: `../verbatim/src/org/hsqldb/test/TestBase.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/test/TestBase.java>
- Local: `../verbatim/src/org/hsqldb/Trigger.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/Trigger.java>
- Local: `../verbatim/src/org/hsqldb/sample/TriggerSample.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/test/sample/TriggerSample.java>
- Local: `../verbatim/src/org/hsqldb/util/MainInvoker.java`
<http://hsqldb.org/doc/2.0/verbatim/src/org/hsqldb/util/MainInvoker.java>
- Local: `../verbatim/sample/hsqldb.cfg`
<http://hsqldb.org/doc/2.0/verbatim/sample/hsqldb.cfg>
- Local: `../verbatim/sample/acl.txt`
<http://hsqldb.org/doc/2.0/verbatim/sample/acl.txt>
- Local: `../verbatim/sample/server.properties`
<http://hsqldb.org/doc/2.0/verbatim/sample/server.properties>
- Local: `../verbatim/sample/sqltool.rc`
<http://hsqldb.org/doc/2.0/verbatim/sample/sqltool.rc>
- Local: `../verbatim/sample/hsqldb.init`
<http://hsqldb.org/doc/2.0/verbatim/sample/hsqldb.init>

SQL Index

Symbols

`_SYSTEM ROLE`, 95

A

ABS function, 189
 ACOS function, 189
 ACTION_ID function, 209
 ADD_MONTHS function, 197
 ADD COLUMN, 66
 add column identity generator, 67
 ADD CONSTRAINT, 66
 ADD DOMAIN CONSTRAINT, 70
 ADMINISTRABLE_ROLE_AUTHORIZATIONS, 81
 aggregate function, 124
 ALL and ANY predicates, 120
 ALTER COLUMN, 67
 alter column identity generator, 68
 alter column nullability, 68
 ALTER DOMAIN, 69
 ALTER INDEX, 77
 ALTER routine, 73
 ALTER SEQUENCE, 75
 ALTER SESSION, 39
 ALTER TABLE, 66
 ALTER USER ... SET INITIAL SCHEMA, 98
 ALTER USER ... SET LOCAL, 98
 ALTER USER ... SET PASSWORD, 97
 ALTER view, 69
 APPLICABLE_ROLES, 81
 ASCII function, 183
 ASIN function, 189
 ASSERTIONS, 81
 ATAN2 function, 189
 ATAN function, 189
 AUTHORIZATION IDENTIFIER, 95
 AUTHORIZATIONS, 82

B

BACKUP DATABASE, 219
 BETWEEN predicate, 119
 binary literal, 108
 BINARY types, 15
 BIT_LENGTH function, 183
 BITAND function, 189
 BITANDNOT function, 190
 bit literal, 108
 BITNOT function, 190
 BITOR function, 190
 BIT types, 16
 BITXOR function, 190

boolean literal, 109
 BOOLEAN types, 14
 boolean value expression, 117

C

CARDINALITY function, 203
 CASCADE or RESTRICT, 55
 case expression, 113
 CASEWHEN function, 204
 CASE WHEN in routines, 160
 CAST, 114
 CEIL function, 189
 CHANGE_AUTHORIZATION, 95
 CHAR_LENGTH, 183
 CHARACTER_LENGTH, 183
 CHARACTER_SETS, 82
 character literal, 107
 CHARACTER types, 14
 character value function, 116
 CHAR function, 183
 CHECK_CONSTRAINT_ROUTINE_USAGE, 82
 CHECK_CONSTRAINTS, 82
 CHECK constraint, 63
 CHECKPOINT, 220
 COALESCE expression, 113
 COALESCE function, 204
 COLLATE, 126
 COLLATIONS, 82
 COLUMN_COLUMN_USAGE, 82
 COLUMN_DOMAIN_USAGE, 82
 COLUMN_PRIVILEGES, 82
 COLUMN_UDT_USAGE, 82
 column definition, 59
 column name list, 132
 column reference, 111
 COLUMNS, 82
 COMMENT, 56
 COMMIT, 41
 comparison predicate, 118
 CONCAT_WS function, 184
 CONCAT function, 183
 CONSTRAINT, 126
 CONSTRAINT_COLUMN_USAGE, 82
 CONSTRAINT_TABLE_USAGE, 82
 CONSTRAINT (table constraint), 61
 CONSTRAINT name and characteristics, 61
 CONTAINS predicate, 122
 contextually typed value specification, 111
 CONVERT function, 204
 COS function, 190
 COT function, 190
 CREATE_SCHEMA_ROLE, 95
 CREATE AGGREGATE FUNCTION, 171

CREATE ASSERTION, 79
CREATE CAST, 77
CREATE CHARACTER SET, 78
CREATE COLLATION, 78
CREATE DOMAIN, 69
CREATE FUNCTION, 148
CREATE INDEX, 77
CREATE PROCEDURE, 148
CREATE ROLE, 98
CREATE SCHEMA, 57
CREATE SEQUENCE, 74
CREATE SYNONYM, 76
CREATE TABLE, 58
CREATE TRANSLATION, 79
CREATE TRIGGER, 70, 179
CREATE TYPE, 77
CREATE USER, 97
CREATE VIEW, 68
CROSS JOIN, 133
CRYPT_KEY function, 206
CURDATE function, 194
CURRENT_CATALOG function, 207
CURRENT_DATE function, 194
CURRENT_ROLE function, 207
CURRENT_SCHEMA function, 207
CURRENT_TIME function, 194
CURRENT_TIMESTAMP function, 194
CURRENT_USER function, 207
CURRENT VALUE FOR, 115
CURTIME function, 195

D

DATA_TYPE_PRIVILEGES, 82
DATABASE_ISOLATION_LEVEL function, 208
DATABASE_NAME function, 207
DATABASE_TIMEZONE function, 194
DATABASE_VERSION function, 207
DATABASE function, 207
DATE_ADD function, 199
DATE_SUB function, 199
DATEADD function, 199
DATEDIFF function, 199
datetime and interval literal, 109
Datetime Operations, 20
DATETIME types, 19
datetime value expression, 116
datetime value function, 116
DAYNAME function, 195
DAYOFMONTH function, 195
DAYOFWEEK function, 195
DAYOFYEAR function, 195
DAYS function datetime, 195
DBA ROLE, 95

DECLARE CURSOR, 106
DECLARE HANDLER, 157
DECLARE variable, 155
DECODE function, 205
DEFAULT clause, 60
DEGREES function, 190
DELETE FROM, 141
derived table, 130
DETERMINISTIC characteristic, 151
DIAGNOSTICS function, 206
DIFFERENCE function, 184
DISCONNECT, 42
DISTINCT, 136
DOMAIN_CONSTRAINTS, 82
DOMAINS, 82
DROP ASSERTION, 79
DROP CAST, 78
DROP CHARACTER SET, 78
DROP COLLATION, 79
DROP COLUMN, 66
drop column idenity generator, 68
DROP CONSTRAINT, 66
DROP DEFAULT (table), 67
DROP DOMAIN, 70
DROP DOMAIN CONSTRAINT, 70
DROP DOMAIN DEFAULT, 70
DROP INDEX, 77
DROP ROLE, 99
DROP routine, 74
DROP SCHEMA, 57
DROP SEQUENCE, 75
DROP SYNONYM, 76
DROP TABLE, 63
DROP TRANSLATION, 79
DROP TRIGGER, 71, 181
DROP USER, 97
DROP VIEW, 69
DYNAMIC RESULT SETS, 152

E

ELEMENT_TYPES, 83
ENABLED_ROLES, 83
EQUALS predicate, 122
EXISTS predicate, 121
EXP function, 190
expression, 113
external authentication, 218
EXTERNAL NAME, 150
EXTRACT function, 197

F

FLOOR function, 190
FOREIGN KEY constraint, 62

FOR loop in routines, 160

G

generated column specification, 59

GET DIAGNOSTICS, 146

GRANTED BY, 99

GRANT privilege, 99

GRANT role, 100

GREATEST function, 205

GROUP BY, 136

GROUPING OPERATIONS, 136

H

HEXTORAW function, 184

HOUR function, 196

I

identifier chain, 110

identifier definition, 54

IDENTITY function, 206

IF EXISTS, 55

IF NOT EXISTS, 56

IFNULL function, 205

IF STATEMENT, 161

INFORMATION_SCHEMA_CATALOG_NAME, 83

IN predicate, 119

INSERT function, 184

INSERT INTO, 142

INSTR function, 184

interval absolute value function, 117

interval term, 116

INTERVAL types, 22

IS_AUTOCOMMIT function, 208

IS_READONLY_DATABASE_FILES function, 208

IS_READONLY_DATABASE function, 208

IS_READONLY_SESSION function, 208

IS DISTINCT predicate, 123

ISNULL function, 205

IS NULL predicate, 120

ISOLATION_LEVEL function, 208

J

JOIN USING, 133

JOIN with condition, 133

K

KEY_COLUMN_USAGE, 83

L

LANGUAGE, 150

LAST_DAY function, 198

LATERAL, 131

LCASE function, 185

LEAST function, 205

LEFT function, 185

LENGTH function, 185

LIKE predicate, 120

LN function, 191

LOAD_FILE function, 205

LOB_ID function, 209

LOCALTIME function, 194

LOCALTIMESTAMP function, 194

LOCATE function, 185

LOCK TABLE, 40

LOG10 function, 191

LOG function, 191

LOOP in routines, 159

LOWER function, 185

LPAD function, 185

LTRIM function, 185

M

MATCH predicate, 121

MAX_CARDINALITY function, 203

MERGE INTO, 144

MINUTE function, 196

MOD function, 191

MONTH function, 196

MONTHNAME function, 196

MONTHS_BETWEEN function, 198

N

name resolution, 135

naming in joined table, 135

naming in select list, 135

NATURAL JOIN, 133

NEXT VALUE FOR, 114

NOW function, 194

NULLIF function, 206

NULL INPUT, 151

numeric literal, 108

NUMERIC types, 12

numeric value expression, 115

numeric value function, 115

NVL2 function, 206

NVL function, 206

O

OCTET_LENGTH function, 185

ON UPDATE clause, 61

OTHER type, 17

OUTER JOIN, 134

OVERLAPS predicate, 122

OVERLAY function, 186

P

PARAMETERS, 83
password complexity, 218
PATH, 126
PI function, 191
POSITION_ARRAY function, 203
POSITION function, 186
POWER function, 191
PRECEDES predicate, 123
PRIMARY KEY constraint, 61
PUBLIC ROLE, 95

Q

QUARTER function, 196

R

RADIANS function, 191
RAND function, 191
RAWTOHEX function, 186
REFERENTIAL_CONSTRAINTS, 83
REGEXP_MATCHES function, 186
REGEXP_REPLACE function, 186
REGEXP_SUBSTRING_ARRAY function, 187
REGEXP_SUBSTRING function, 186
RELEASE SAVEPOINT, 41
RENAME, 56
REPEAT ... UNTIL loop in routines, 159
REPEAT function, 187
REPLACE function, 187
RESIGNAL STATEMENT, 163
RETURN, 162
RETURNS, 148
REVERSE function, 187
REVOKE, 100
REVOKE ROLE, 100
RIGHT function, 187
ROLE_AUTHORIZATION_DESCRIPTORs, 83
ROLE_COLUMN_GRANTS, 83
ROLE_ROUTINE_GRANTS, 83
ROLE_TABLE_GRANTS, 83
ROLE_UDT_GRANTS, 83
ROLE_USAGE_GRANTS, 83
ROLLBACK, 41
ROLLBACK TO SAVEPOINT, 41
ROUND function datetime, 200
ROUND number function, 192
ROUTINE_COLUMN_USAGE, 83
ROUTINE_JAR_USAGE, 83
ROUTINE_PRIVILEGES, 84
ROUTINE_ROUTINE_USAGE, 84
ROUTINE_SEQUENCE_USAGE, 84
ROUTINE_TABLE_USAGE, 84
routine body, 149

routine invocation, 126
ROUTINES, 84
ROW_NUMBER function, 209
ROWNUM function, 209
row value expression, 112
RPAD function, 187
RTRIM function, 187

S

SAVEPOINT, 41
SAVEPOINT LEVEL, 151
schema routine, 72
SCHEMATA, 84
SCRIPT, 220
search condition, 126
SECOND function, 196
SECONDS_SINCE_MIDNIGHT function, 196
SELECT, 128
SELECT : SINGLE ROW, 158
SEQUENCE_ARRAY function, 203
SEQUENCES, 84
SESSION_ID function, 208
SESSION_ISOLATION_LEVEL function, 208
SESSION_TIMEZONE function, 193
SESSION_USER function, 207
SESSIONTIMEZONE function, 193
SET AUTOCOMMIT, 39
SET CATALOG, 43
set clause in UPDATE and MERGE statements, 144
SET CONSTRAINTS, 40
SET DATABASE AUTHENTICATION FUNCTION, 237
SET DATABASE COLLATION, 221
SET DATABASE DEFAULT INITIAL SCHEMA, 98
SET DATABASE DEFAULT ISOLATION LEVEL, 224
SET DATABASE DEFAULT RESULT MEMORY ROWS, 221
SET DATABASE DEFAULT TABLE TYPE, 222
SET DATABASE EVENT LOG LEVEL, 222
SET DATABASE GC, 223
SET DATABASE LIVE OBJECT, 230
SET DATABASE PASSWORD CHECK FUNCTION, 236
SET DATABASE SQL AVG SCALE, 228
SET DATABASE SQL CHARACTER LITERAL, 227
SET DATABASE SQL CONCAT NULLS, 227
SET DATABASE SQL CONVERT TRUNCATE, 228
SET DATABASE SQL DOUBLE NAN, 229
SET DATABASE SQL IGNORECASE, 229
SET DATABASE SQL NAMES, 224
SET DATABASE SQL NULLS FIRST, 229
SET DATABASE SQL NULLS ORDER, 229

- SET DATABASE SQL REFERENCES, 225
- SET DATABASE SQL REGULAR NAMES, 225
- SET DATABASE SQL SIZE, 224
- SET DATABASE SQL SYNTAX DB2, 230
- SET DATABASE SQL SYNTAX MSS, 230
- SET DATABASE SQL SYNTAX MYS, 231
- SET DATABASE SQL SYNTAX ORA, 231
- SET DATABASE SQL SYNTAX PGS, 231
- SET DATABASE SQL TDC DELETE, 226
- SET DATABASE SQL TRANSLATE TTI TYPES, 226
- SET DATABASE SQL TYPES, 225, 226
- SET DATABASE SQL UNIQUE NULLS, 227
- SET DATABASE TEXT TABLE DEFAULTS, 223
- SET DATABASE TRANSACTION CONTROL, 223
- SET DATABASE TRANSACTION ROLLBACK ON CONFLICT, 223
- SET DATABASE UNIQUE NAME, 224
- SET DATA TYPE, 67
- SET DEFAULT, 67
- SET DOMAIN DEFAULT, 70
- SET FILES BACKUP INCREMENT, 232
- SET FILES CACHE ROWS, 233
- SET FILES CACHE SIZE, 233
- SET FILES DEFRAG, 233
- SET FILES LOB COMPRESSED, 235
- SET FILES LOB SCALE, 235
- SET FILES LOG, 233
- SET FILES LOG SIZE, 234
- SET FILES NIO, 234
- SET FILES NIO SIZE, 234
- SET FILES SCALE, 235
- SET FILES SCRIPT FORMAT, 236
- SET FILES WRITE DELAY, 234
- set function specification, 112
- SET IGNORECASE, 44
- SET INITIAL SCHEMA*, 98
- SET MAXROWS, 44
- SET OPERATIONS, 137
- SET PASSWORD, 98
- SET PATH, 44
- SET REFERENTIAL INTEGRITY, 232
- SET ROLE, 43
- SET SCHEMA, 43
- SET SESSION AUTHORIZATION, 42
- SET SESSION CHARACTERISTICS, 42
- SET SESSION RESULT MEMORY ROWS, 44
- SET TABLE CLUSTERED, 63
- SET TABLE read-write property, 64
- SET TABLE SOURCE, 64
- SET TABLE SOURCE HEADER, 65
- SET TABLE SOURCE on-off, 65
- SET TABLE TYPE, 64, 236
- SET TIME ZONE, 43
- SET TRANSACTION, 39
- SHUTDOWN, 219
- SIGNAL STATEMENT, 162
- SIGN function, 192
- SIN function, 192
- SORT_ARRAY function, 203
- sort specification list, 140
- SOUNDEX function, 187
- SPACE function, 188
- SPECIFIC, 56
- SPECIFIC NAME, 150
- SQL_FEATURES, 84
- SQL_IMPLEMENTATION_INFO, 84
- SQL_PACKAGES, 84
- SQL_PARTS, 84
- SQL_SIZING, 84
- SQL_SIZING_PROFILES, 84
- SQL DATA access characteristic, 151
- SQL parameter reference, 111
- SQL procedure statement, 76
- SQL routine body, 149
- SQRT function, 192
- START TRANSACTION, 39
- string value expression, 116
- SUBSTR function, 188
- SUBSTRING function, 188
- SUCCEEDS predicate, 123
- SYSDATE function, 195
- SYSTEM_BESTROWIDENTIFIER, 86
- SYSTEM_CACHEINFO, 86
- SYSTEM_COLUMN_SEQUENCE_USAGE, 86
- SYSTEM_COLUMNS, 86
- SYSTEM_COMMENTS, 86
- SYSTEM_CONNECTION_PROPERTIES, 86
- SYSTEM_CROSSREFERENCE, 86
- SYSTEM_INDEXINFO, 86
- SYSTEM_PRIMARYKEYS, 86
- SYSTEM_PROCEDURECOLUMNS, 86
- SYSTEM_PROCEDURES, 86
- SYSTEM_PROPERTIES, 86
- SYSTEM_SCHEMAS, 87
- SYSTEM_SEQUENCES, 87
- SYSTEM_SESSIONINFO, 87
- SYSTEM_SESSIONS, 87
- SYSTEM_TABLES, 87
- SYSTEM_TABLESTATS, 87
- SYSTEM_TABLETYPES, 87
- SYSTEM_TEXTTABLES, 87
- SYSTEM_TYPEINFO, 87
- SYSTEM_UDTS, 87
- SYSTEM_USER function, 207
- SYSTEM_USERS, 87
- SYSTEM_VERSIONCOLUMNS, 87
- SYSTIMESTAMP function, 195
- SYS USER, 95

T

TABLE_CONSTRAINTS, 84
TABLE_PRIVILEGES, 85
Table Function Derived Table, 132
TABLES, 84
TAN function, 192
TIMESTAMP_WITH_ZONE function, 201
TIMESTAMPADD function, 198
TIMESTAMPDIFF function, 198
TIMESTAMP function, 200
Time Zone, 19
TIMEZONE function, 193
TO_CHAR function, 201
TO_DATE function, 201
TO_NUMBER function, 192
TO_TIMESTAMP function, 201
TODAY function, 195
TRANSACTION_CONTROL function, 209
TRANSACTION_ID function, 209
TRANSACTION_SIZE function, 209
transaction characteristics, 40
TRANSLATE function, 188
TRANSLATIONS, 85
TRIGGER_COLUMN_USAGE, 85
TRIGGER_ROUTINE_USAGE, 85
TRIGGER_SEQUENCE_USAGE, 85
TRIGGER_TABLE_USAGE, 85
TRIGGERED_UPDATE_COLUMNS, 85
TRIGGERED SQL STATEMENT, 180
TRIGGER EXECUTION ORDER, 180
TRIGGERS, 85
TRIM_ARRAY function, 203
TRIM function, 188
TRUNCATE function, 192
TRUNCATE SCHEMA, 142
TRUNCATE TABLE, 141
TRUNC function datetime, 200
TRUNC function numeric, 192

U

UCASE function, 188
unicode escape elements, 106
UNION JOIN, 133
UNIQUE constraint, 61
UNIQUE predicate, 121
UNIX_MILLIS function, 196
UNIX_TIMESTAMP function, 197
UNNEST, 131
UPDATE, 143
UPPER function, 189
USAGE_PRIVILEGES, 85
USER_DEFINED_TYPES, 85
USER function, 207

UUID function, 206

V

value expression, 115
value expression primary, 111
value specification, 112
VIEW_COLUMN_USAGE, 85
VIEW_ROUTINE_USAGE, 85
VIEW_TABLE_USAGE, 85
VIEWS, 85

W

WEEK function, 197
WHILE loop in routines, 159
WIDTH_BUCKET function, 193

Y

YEAR function, 197

General Index

Symbols

`_SYSTEM ROLE`, 95

A

ABS function, 189
 ACL, 268
 ACOS function, 189
 ACTION_ID function, 209
 ADD_MONTHS function, 197
 ADD COLUMN, 66
 add column identity generator, 67
 ADD CONSTRAINT, 66
 ADD DOMAIN CONSTRAINT, 70
 ADMINISTRABLE_ROLE_AUTHORIZATIONS, 81
 aggregate function, 124
 ALL and ANY predicates, 120
 ALTER COLUMN, 67
 alter column identity generator, 68
 alter column nullability, 68
 ALTER DOMAIN, 69
 ALTER INDEX, 77
 ALTER routine, 73
 ALTER SEQUENCE, 75
 ALTER SESSION, 39
 ALTER TABLE, 66
 ALTER USER ... SET INITIAL SCHEMA, 98
 ALTER USER ... SET LOCAL, 98
 ALTER USER ... SET PASSWORD, 97
 ALTER view, 69
 Ant, 306
 APPLICABLE_ROLES, 81
 ASCII function, 183
 ASIN function, 189
 ASSERTIONS, 81
 ATAN2 function, 189
 ATAN function, 189
 AUTHORIZATION IDENTIFIER, 95
 AUTHORIZATIONS, 82

B

backup, 214
 BACKUP DATABASE, 219
 BETWEEN predicate, 119
 binary literal, 108
 BINARY types, 15
 BIT_LENGTH function, 183
 BITAND function, 189
 BITANDNOT function, 190
 bit literal, 108
 BITNOT function, 190

BITOR function, 190
 BIT types, 16
 BITXOR function, 190
 boolean literal, 109
 BOOLEAN types, 14
 boolean value expression, 117

C

CARDINALITY function, 203
 CASCADE or RESTRICT, 55
 case expression, 113
 CASEWHEN function, 204
 CASE WHEN in routines, 160
 CAST, 114
 CEIL function, 189
 CHANGE_AUTHORIZATION, 95
 CHAR_LENGTH, 183
 CHARACTER_LENGTH, 183
 CHARACTER_SETS, 82
 character literal, 107
 CHARACTER types, 14
 character value function, 116
 CHAR function, 183
 CHECK_CONSTRAINT_ROUTINE_USAGE, 82
 CHECK_CONSTRAINTS, 82
 CHECK constraint, 63
 CHECKPOINT, 220
 COALESCE expression, 113
 COALESCE function, 204
 COLLATE, 126
 COLLATIONS, 82
 COLUMN_COLUMN_USAGE, 82
 COLUMN_DOMAIN_USAGE, 82
 COLUMN_PRIVILEGES, 82
 COLUMN_UDT_USAGE, 82
 column definition, 59
 column name list, 132
 column reference, 111
 COLUMNS, 82
 COMMENT, 56
 COMMIT, 41
 comparison predicate, 118
 CONCAT_WS function, 184
 CONCAT function, 183
 CONSTRAINT, 126
 CONSTRAINT_COLUMN_USAGE, 82
 CONSTRAINT_TABLE_USAGE, 82
 CONSTRAINT (table constraint), 61
 CONSTRAINT name and characteristics, 61
 CONTAINS predicate, 122
 contextually typed value specification, 111
 CONVERT function, 204
 COS function, 190

COT function, 190
CREATE_SCHEMA ROLE, 95
CREATE AGGREGATE FUNCTION, 171
CREATE ASSERTION, 79
CREATE CAST, 77
CREATE CHARACTER SET, 78
CREATE COLLATION, 78
CREATE DOMAIN, 69
CREATE FUNCTION, 148
CREATE INDEX, 77
CREATE PROCEDURE, 148
CREATE ROLE, 98
CREATE SCHEMA, 57
CREATE SEQUENCE, 74
CREATE SYNONYM, 76
CREATE TABLE, 58
CREATE TRANSLATION, 79
CREATE TRIGGER, 70, 179
CREATE TYPE, 77
CREATE USER, 97
CREATE VIEW, 68
CROSS JOIN, 133
CRYPT_KEY function, 206
CURDATE function, 194
CURRENT_CATALOG function, 207
CURRENT_DATE function, 194
CURRENT_ROLE function, 207
CURRENT_SCHEMA function, 207
CURRENT_TIME function, 194
CURRENT_TIMESTAMP function, 194
CURRENT_USER function, 207
CURRENT VALUE FOR, 115
CURTIME function, 195

D

DATA_TYPE_PRIVILEGES, 82
DATABASE_ISOLATION_LEVEL function, 208
DATABASE_NAME function, 207
DATABASE_TIMEZONE function, 194
DATABASE_VERSION function, 207
DATABASE function, 207
DATE_ADD function, 199
DATE_SUB function, 199
DATEADD function, 199
DATEDIFF function, 199
datetime and interval literal, 109
Datetime Operations, 20
DATETIME types, 19
datetime value expression, 116
datetime value function, 116
DAYNAME function, 195
DAYOFMONTH function, 195
DAYOFWEEK function, 195

DAYOFYEAR function, 195
DAYS function datetime, 195
DBA ROLE, 95
DECLARE CURSOR, 106
DECLARE HANDLER, 157
DECLARE variable, 155
DECODE function, 205
DEFAULT clause, 60
DEGREES function, 190
DELETE FROM, 141
derived table, 130
DETERMINISTIC characteristic, 151
DIAGNOSTICS function, 206
DIFFERENCE function, 184
DISCONNECT, 42
DISTINCT, 136
DOMAIN_CONSTRAINTS, 82
DOMAINS, 82
DROP ASSERTION, 79
DROP CAST, 78
DROP CHARACTER SET, 78
DROP COLLATION, 79
DROP COLUMN, 66
drop column idenity generator, 68
DROP CONSTRAINT, 66
DROP DEFAULT (table), 67
DROP DOMAIN, 70
DROP DOMAIN CONSTRAINT, 70
DROP DOMAIN DEFAULT, 70
DROP INDEX, 77
DROP ROLE, 99
DROP routine, 74
DROP SCHEMA, 57
DROP SEQUENCE, 75
DROP SYNONYM, 76
DROP TABLE, 63
DROP TRANSLATION, 79
DROP TRIGGER, 71, 181
DROP USER, 97
DROP VIEW, 69
DYNAMIC RESULT SETS, 152

E

ELEMENT_TYPES, 83
ENABLED_ROLES, 83
EQUALS predicate, 122
EXISTS predicate, 121
EXP function, 190
expression, 113
external authentication, 218
EXTERNAL NAME, 150
EXTRACT function, 197

F

FLOOR function, 190
FOREIGN KEY constraint, 62
FOR loop in routines, 160

G

generated column specification, 59
GET DIAGNOSTICS, 146
Gradle, 300
GRANTED BY, 99
GRANT privilege, 99
GRANT role, 100
GREATEST function, 205
GROUP BY, 136
GROUPING OPERATIONS, 136

H

HEXTORAW function, 184
HOUR function, 196

I

identifier chain, 110
identifier definition, 54
IDENTITY function, 206
IF EXISTS, 55
IF NOT EXISTS, 56
IFNULL function, 205
IF STATEMENT, 161
INFORMATION_SCHEMA_CATALOG_NAME, 83
init script, 277
IN predicate, 119
INSERT function, 184
INSERT INTO, 142
INSTR function, 184
interval absolute value function, 117
interval term, 116
INTERVAL types, 22
IS_AUTOCOMMIT function, 208
IS_READONLY_DATABASE_FILES function, 208
IS_READONLY_DATABASE function, 208
IS_READONLY_SESSION function, 208
IS DISTINCT predicate, 123
ISNULL function, 205
IS NULL predicate, 120
ISOLATION_LEVEL function, 208

J

JOIN USING, 133
JOIN with condition, 133

K

KEY_COLUMN_USAGE, 83

L

LANGUAGE, 150
LAST_DAY function, 198
LATERAL, 131
LCASE function, 185
LEAST function, 205
LEFT function, 185
LENGTH function, 185
LIKE predicate, 120
LN function, 191
LOAD_FILE function, 205
LOB_ID function, 209
LOCALTIME function, 194
LOCALTIMESTAMP function, 194
LOCATE function, 185
LOCK TABLE, 40
LOG10 function, 191
LOG function, 191
LOOP in routines, 159
LOWER function, 185
LPAD function, 185
LTRIM function, 185

M

MATCH predicate, 121
MAX_CARDINALITY function, 203
memory use, 284
MERGE INTO, 144
MINUTE function, 196
MOD function, 191
MONTH function, 196
MONTHNAME function, 196
MONTHS_BETWEEN function, 198

N

name resolution, 135
naming in joined table, 135
naming in select list, 135
NATURAL JOIN, 133
NEXT VALUE FOR, 114
NOW function, 194
NULLIF function, 206
NULL INPUT, 151
numeric literal, 108
NUMERIC types, 12
numeric value expression, 115
numeric value function, 115
NVL2 function, 206
NVL function, 206

O

OCTET_LENGTH function, 185
ON UPDATE clause, 61

OTHER type, 17
OUTER JOIN, 134
OVERLAPS predicate, 122
OVERLAY function, 186

P

PARAMETERS, 83
password complexity, 218
PATH, 126
PI function, 191
POSITION_ARRAY function, 203
POSITION function, 186
POWER function, 191
PRECEDES predicate, 123
PRIMARY KEY constraint, 61
PUBLIC ROLE, 95

Q

QUARTER function, 196

R

RADIANS function, 191
RAND function, 191
RAWTOHEX function, 186
REFERENTIAL_CONSTRAINTS, 83
REGEXP_MATCHES function, 186
REGEXP_REPLACE function, 186
REGEXP_SUBSTRING_ARRAY function, 187
REGEXP_SUBSTRING function, 186
RELEASE SAVEPOINT, 41
RENAME, 56
REPEAT ... UNTIL loop in routines, 159
REPEAT function, 187
REPLACE function, 187
RESIGNAL STATEMENT, 163
RETURN, 162
RETURNS, 148
REVERSE function, 187
REVOKE, 100
REVOKE ROLE, 100
RIGHT function, 187
ROLE_AUTHORIZATION_DESCRIPTORs, 83
ROLE_COLUMN_GRANTS, 83
ROLE_ROUTINE_GRANTS, 83
ROLE_TABLE_GRANTS, 83
ROLE_UDT_GRANTS, 83
ROLE_USAGE_GRANTS, 83
ROLLBACK, 41
ROLLBACK TO SAVEPOINT, 41
ROUND function datetime, 200
ROUND number function, 192
ROUTINE_COLUMN_USAGE, 83
ROUTINE_JAR_USAGE, 83

ROUTINE_PRIVILEGES, 84
ROUTINE_ROUTINE_USAGE, 84
ROUTINE_SEQUENCE_USAGE, 84
ROUTINE_TABLE_USAGE, 84
routine body, 149
routine invocation, 126
ROUTINES, 84
ROW_NUMBER function, 209
ROWNUM function, 209
row value expression, 112
RPAD function, 187
RTRIM function, 187

S

SAVEPOINT, 41
SAVEPOINT LEVEL, 151
schema routine, 72
SCHEMATA, 84
SCRIPT, 220
search condition, 126
SECOND function, 196
SECONDS_SINCE_MIDNIGHT function, 196
security, 6, 265, 268
SELECT, 128
SELECT : SINGLE ROW, 158
SEQUENCE_ARRAY function, 203
SEQUENCES, 84
SESSION_ID function, 208
SESSION_ISOLATION_LEVEL function, 208
SESSION_TIMEZONE function, 193
SESSION_USER function, 207
SESSIONTIMEZONE function, 193
SET AUTOCOMMIT, 39
SET CATALOG, 43
set clause in UPDATE and MERGE statements, 144
SET CONSTRAINTS, 40
SET DATABASE AUTHENTICATION FUNCTION, 237
SET DATABASE COLLATION, 221
SET DATABASE DEFAULT INITIAL SCHEMA, 98
SET DATABASE DEFAULT ISOLATION LEVEL, 224
SET DATABASE DEFAULT RESULT MEMORY ROWS, 221
SET DATABASE DEFAULT TABLE TYPE, 222
SET DATABASE EVENT LOG LEVEL, 222
SET DATABASE GC, 223
SET DATABASE LIVE OBJECT, 230
SET DATABASE PASSWORD CHECK FUNCTION, 236
SET DATABASE SQL AVG SCALE, 228
SET DATABASE SQL CHARACTER LITERAL, 227
SET DATABASE SQL CONCAT NULLS, 227

- SET DATABASE SQL CONVERT TRUNCATE, 228
- SET DATABASE SQL DOUBLE NAN, 229
- SET DATABASE SQL IGNORECASE, 229
- SET DATABASE SQL NAMES, 224
- SET DATABASE SQL NULLS FIRST, 229
- SET DATABASE SQL NULLS ORDER, 229
- SET DATABASE SQL REFERENCES, 225
- SET DATABASE SQL REGULAR NAMES, 225
- SET DATABASE SQL SIZE, 224
- SET DATABASE SQL SYNTAX DB2, 230
- SET DATABASE SQL SYNTAX MSS, 230
- SET DATABASE SQL SYNTAX MYS, 231
- SET DATABASE SQL SYNTAX ORA, 231
- SET DATABASE SQL SYNTAX PGS, 231
- SET DATABASE SQL TDC DELETE, 226
- SET DATABASE SQL TRANSLATE TTI TYPES, 226
- SET DATABASE SQL TYPES, 225, 226
- SET DATABASE SQL UNIQUE NULLS, 227
- SET DATABASE TEXT TABLE DEFAULTS, 223
- SET DATABASE TRANSACTION CONTROL, 223
- SET DATABASE TRANSACTION ROLLBACK ON CONFLICT, 223
- SET DATABASE UNIQUE NAME, 224
- SET DATA TYPE, 67
- SET DEFAULT, 67
- SET DOMAIN DEFAULT, 70
- SET FILES BACKUP INCREMENT, 232
- SET FILES CACHE ROWS, 233
- SET FILES CACHE SIZE, 233
- SET FILES DEFRAG, 233
- SET FILES LOB COMPRESSED, 235
- SET FILES LOB SCALE, 235
- SET FILES LOG, 233
- SET FILES LOG SIZE, 234
- SET FILES NIO, 234
- SET FILES NIO SIZE, 234
- SET FILES SCALE, 235
- SET FILES SCRIPT FORMAT, 236
- SET FILES WRITE DELAY, 234
- set function specification, 112
- SET IGNORECASE, 44
- SET INITIAL SCHEMA*, 98
- SET MAXROWS, 44
- SET OPERATIONS, 137
- SET PASSWORD, 98
- SET PATH, 44
- SET REFERENTIAL INTEGRITY, 232
- SET ROLE, 43
- SET SCHEMA, 43
- SET SESSION AUTHORIZATION, 42
- SET SESSION CHARACTERISTICS, 42
- SET SESSION RESULT MEMORY ROWS, 44
- SET TABLE CLUSTERED, 63
- SET TABLE read-write property, 64
- SET TABLE SOURCE, 64
- SET TABLE SOURCE HEADER, 65
- SET TABLE SOURCE on-off, 65
- SET TABLE TYPE, 64, 236
- SET TIME ZONE, 43
- SET TRANSACTION, 39
- SHUTDOWN, 219
- SIGNAL STATEMENT, 162
- SIGN function, 192
- SIN function, 192
- SORT_ARRAY function, 203
- sort specification list, 140
- SOUNDEX function, 187
- SPACE function, 188
- SPECIFIC, 56
- SPECIFIC NAME, 150
- SQL_FEATURES, 84
- SQL_IMPLEMENTATION_INFO, 84
- SQL_PACKAGES, 84
- SQL_PARTS, 84
- SQL_SIZING, 84
- SQL_SIZING_PROFILES, 84
- SQL DATA access characteristic, 151
- SQL parameter reference, 111
- SQL procedure statement, 76
- SQL routine body, 149
- SQRT function, 192
- START TRANSACTION, 39
- string value expression, 116
- SUBSTR function, 188
- SUBSTRING function, 188
- SUCCEEDS predicate, 123
- SYSDATE function, 195
- SYSTEM_BESTROWIDENTIFIER, 86
- SYSTEM_CACHEINFO, 86
- SYSTEM_COLUMN_SEQUENCE_USAGE, 86
- SYSTEM_COLUMNS, 86
- SYSTEM_COMMENTS, 86
- SYSTEM_CONNECTION_PROPERTIES, 86
- SYSTEM_CROSSREFERENCE, 86
- SYSTEM_INDEXINFO, 86
- SYSTEM_PRIMARYKEYS, 86
- SYSTEM_PROCEDURECOLUMNS, 86
- SYSTEM_PROCEDURES, 86
- SYSTEM_PROPERTIES, 86
- SYSTEM_SCHEMAS, 87
- SYSTEM_SEQUENCES, 87
- SYSTEM_SESSIONINFO, 87
- SYSTEM_SESSIONS, 87
- SYSTEM_TABLES, 87
- SYSTEM_TABLESTATS, 87
- SYSTEM_TABLETYPES, 87
- SYSTEM_TEXTTABLES, 87
- SYSTEM_TYPEINFO, 87

SYSTEM_UDTS, 87
SYSTEM_USER function, 207
SYSTEM_USERS, 87
SYSTEM_VERSIONCOLUMNS, 87
SYSTIMESTAMP function, 195
SYS USER, 95

T

TABLE_CONSTRAINTS, 84
TABLE_PRIVILEGES, 85
Table Function Derived Table, 132
TABLES, 84
TAN function, 192
TIMESTAMP_WITH_ZONE function, 201
TIMESTAMPADD function, 198
TIMESTAMPDIFF function, 198
TIMESTAMP function, 200
Time Zone, 19
TIMEZONE function, 193
TO_CHAR function, 201
TO_DATE function, 201
TO_NUMBER function, 192
TO_TIMESTAMP function, 201
TODAY function, 195
TRANSACTION_CONTROL function, 209
TRANSACTION_ID function, 209
TRANSACTION_SIZE function, 209
transaction characteristics, 40
TRANSLATE function, 188
TRANSLATIONS, 85
TRIGGER_COLUMN_USAGE, 85
TRIGGER_ROUTINE_USAGE, 85
TRIGGER_SEQUENCE_USAGE, 85
TRIGGER_TABLE_USAGE, 85
TRIGGERED_UPDATE_COLUMNS, 85
TRIGGERED SQL STATEMENT, 180
TRIGGER EXECUTION ORDER, 180
TRIGGERS, 85
TRIM_ARRAY function, 203
TRIM function, 188
TRUNCATE function, 192
TRUNCATE SCHEMA, 142
TRUNCATE TABLE, 141
TRUNC function datetime, 200
TRUNC function numeric, 192

U

UCASE function, 188
unicode escape elements, 106
UNION JOIN, 133
UNIQUE constraint, 61
UNIQUE predicate, 121
UNIX_MILLIS function, 196

UNIX_TIMESTAMP function, 197
UNNEST, 131
UPDATE, 143
upgrading, 290
UPPER function, 189
USAGE_PRIVILEGES, 85
USER_DEFINED_TYPES, 85
USER function, 207
UUID function, 206

V

value expression, 115
value expression primary, 111
value specification, 112
VIEW_COLUMN_USAGE, 85
VIEW_ROUTINE_USAGE, 85
VIEW_TABLE_USAGE, 85
VIEWS, 85

W

WEEK function, 197
WHILE loop in routines, 159
WIDTH_BUCKET function, 193

Y

YEAR function, 197